

# Crawford County Road Commission 2025 Transportation Asset Management Plan

A plan describing the Crawford County Road Commission's transportation assets and conditions

*Prepared by:*  
Donald Babcock  
Managing Director  
Crawford County Road Commission



# CONTENTS

Table of Figures .....	ii
Table of Tables .....	ii
Executive Summary .....	iii
Introduction.....	1
1. Pavement Assets .....	3
<i>Inventory of Assets</i> .....	4
<i>Condition, Goals, and Trend</i> .....	5
<i>Modelled Trends, Gap Analysis, and Planned Projects</i> .....	8
2. Bridge Assets .....	11
<i>Inventory of Assets</i> .....	12
<i>Condition, Goals, and Trend</i> .....	14
<i>Programmed/Funded Projects, Gap Analysis, and Planned Projects</i> .....	16
3. Culvert Assets .....	18
<i>Inventory of Assets</i> .....	19
<i>Goals</i> .....	19
<i>Planned Projects</i> .....	19
4. Signal Assets .....	20
<i>Inventory of Assets</i> .....	21
<i>Goals</i> .....	21
<i>Planned Projects</i> .....	21
5. Financial Resources .....	22
<i>Anticipated Revenues &amp; Expenses</i> .....	22
6. Risk of Failure Analysis .....	25
7. Coordination with Other Entities .....	27
Planning .....	27
8. Proof of Acceptance.....	29
A. Pavement Asset Management Plan .....	31
B. Bridge Asset Management Plan .....	32
C. Culvert Asset Management Plan Supplement .....	33
<i>Culvert Primer</i> .....	33
D. Traffic Signals Asset Management Plan Supplement .....	35
<i>Traffic Signals Primer</i> .....	35
E. Glossary & Acronyms .....	36
<i>Glossary</i> .....	36
<i>List of Acronyms</i> .....	44

## TABLE OF FIGURES

Figure 1: Map showing location or roads managed by CCRC and the current condition for paved roads in green for good (PASER 10, 9, 8), yellow for fair (PASER 7, 6, 5), and red for poor (PASER 4, 3, 2, 1) and for unpaved roads in blue .....	4
Figure 2: Pavement type by percentage maintained by CCRC. Undefined pavements have not been inventoried in CCRC’s asset management system to date, but will be included as data becomes available. ....	5
Figure 3: county primary network condition, goals, and trend .....	6
Figure 5: Distribution of IBR numbers for current condition (solid) and for goals (dotted) .....	7
Figure 6 : Map illustrating planned projects for pavement assets.....	9
Figure 7: Map illustrating locations of CCRC’s bridge assets.....	12
Figure 8: Condition, projected trend, and goal for CCRC’s good/fair and structurally deficient bridges.....	16
Figure 9: Key transportation links in CCRC’s road and bridge network.....	26

## TABLE OF TABLES

Table 1: NCPP Modelled Trends, Planned Projects, and Gap Analysis for 's Road Assets .....	8
Table 2: Type, Size, and Condition of CCRC's Bridge Assets .....	14
Table 3: Planned Projects and Gap Analysis .....	17
Table 4: Annual Fiscal-Year Revenues & Expenditures per Fiscal Year.....	24

## **EXECUTIVE SUMMARY**

As conduits for commerce and connections to vital services, roads and bridges are some of the most important assets in any community, and other assets like culverts, traffic signs, traffic signals, and utilities support and affect roads and bridges. The Crawford County Road Commission's (CCRC) roads, bridges, and support systems are also some of the most valuable and extensive public assets, all of which are paid for with taxes collected from ordinary citizens and businesses. The cost of building and maintaining these assets, their importance to society, and the investment made by taxpayers all place a high level of responsibility on local agencies to plan, build, and maintain roads, bridges, and support assets in an efficient and effective manner. This asset management plan is intended to report on how CCRC is meeting its obligations to maintain the public assets for which it is responsible.

This plan identifies CCRC's assets and condition and how CCRC maintains and plans to improve the overall condition of those assets. An asset management plan is required by Michigan Public Act 325 of 2018, and this document represents fulfillment of some of CCRC's obligations towards meeting these requirements. However, this plan and its supporting documents are intended to be much more than a fulfillment of required reporting. This asset management plan helps to demonstrate CCRC's responsible use of public funds by providing elected and appointed officials as well as the general public with the inventory and condition information of CCRC's assets, and it gives taxpayers the information they need to make informed decisions about investing in CCRC's essential transportation infrastructure.



# INTRODUCTION

Asset management is defined by Public Act 325 of 2018 as “an ongoing process of maintaining, preserving, upgrading, and operating physical assets cost effectively, based on a continuous physical inventory and condition assessment and investment to achieve established performance goals”. In other words, asset management is a process that uses data to manage and track assets, like roads and bridges, in a cost-effective manner using a combination of engineering and business principles. This process is endorsed by leaders in municipal planning and transportation infrastructure, including the Michigan Municipal League, County Road Association of Michigan, the Michigan Department of Transportation (MDOT), and the Federal Highway Administration (FHWA). The Crawford County Road Commission is supported in its use of asset management principles and processes by the Michigan Transportation Asset Management Council (TAMC), formed by the State of Michigan.

Asset management, in the context of this plan, ensures that public funds are spent as effectively as possible to maximize the condition of the road and bridge network. Asset management also provides a transparent decision-making process that allows the public to understand the technical and financial challenges of managing transportation infrastructure with a limited budget.

The Crawford County Road Commission (CCRC) has adopted an “asset management” business process to overcome the challenges presented by having limited financial, staffing, and other resources while needing to meet road users’ expectations. CCRC is responsible for maintaining and operating over 714.106 centerline miles of roads and 21 bridge structures. It is also responsible for 100 culverts and 10 signals.

This 2025 plan identifies CCRC’s transportation assets and their condition as well as the strategy that CCRC uses to maintain and upgrade particular assets given CCRC’s condition goals, priorities of network’s road users, and resources. An updated plan is to be released approximately every three years both to comply with Public Act 325 and to reflect changes in road conditions, finances, and priorities.

Questions regarding the use or content of this plan should be directed to Donald Babcock at 500 Huron Street, Grayling, MI. 49738 or at (989) 348-2281 and/or [dabcrawford1215@gmail.com](mailto:dabcrawford1215@gmail.com). A copy of this plan can be accessed on our website at [crawford-crc.com](http://crawford-crc.com).

# 1. PAVEMENT ASSETS



CCRC is responsible for 714.106 centerline miles of public roads. An inventory of these miles divides them into different network classes based on road purpose/use and funding priorities as identified at the state level: county primary road network, which is prioritized for state-level funding, and county local road network.

## Inventory of Assets

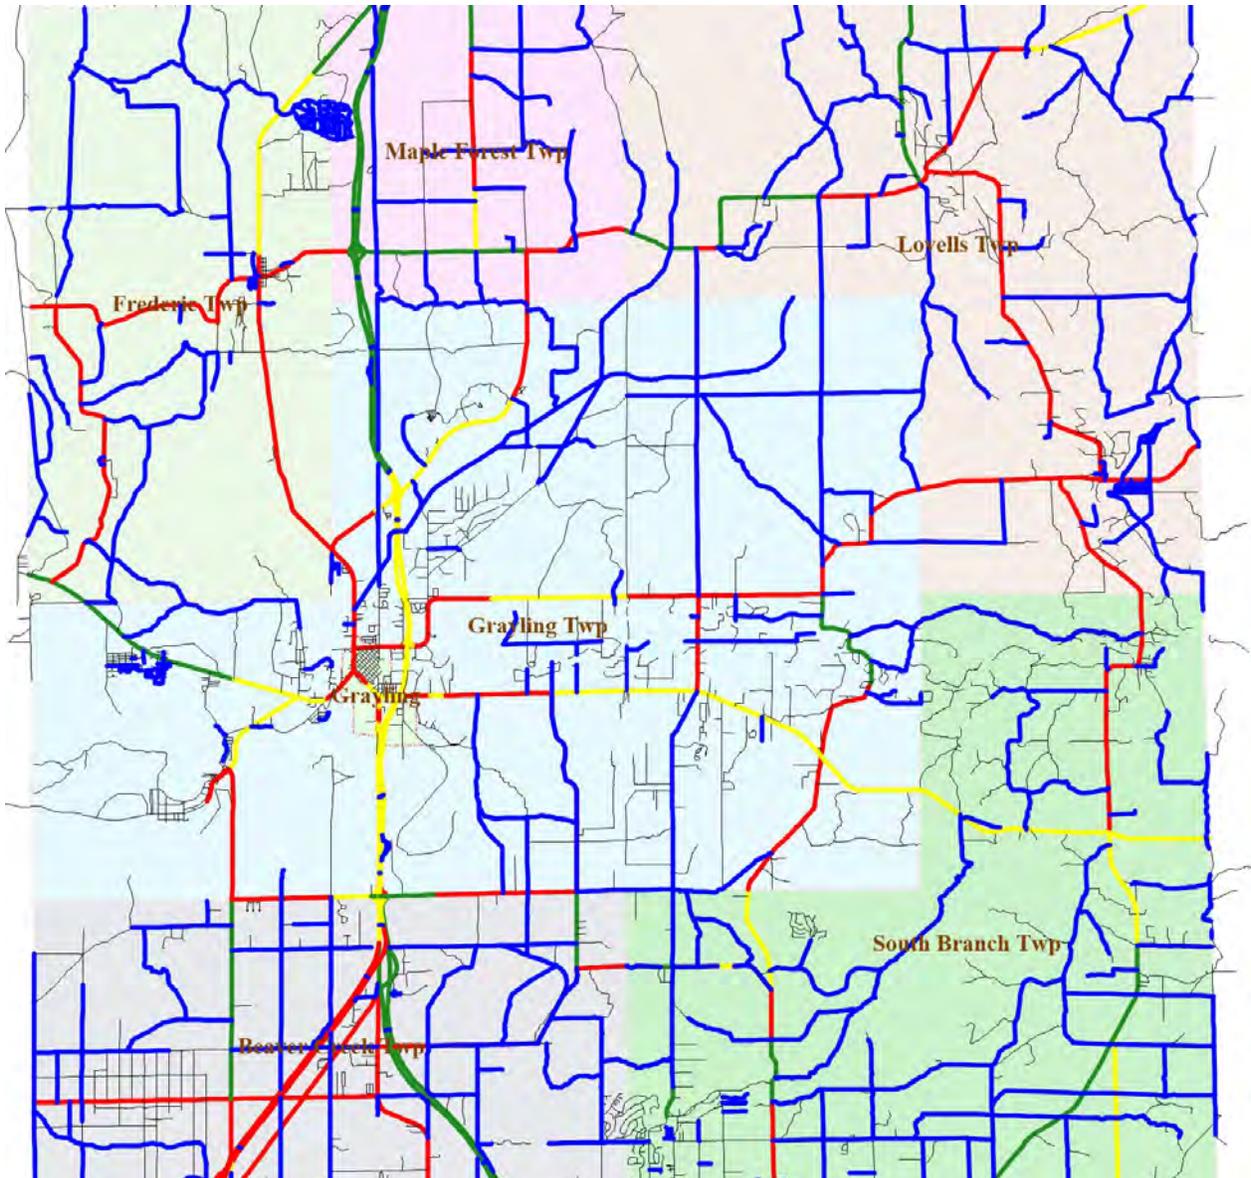


Figure 1: Map showing location of roads managed by CCRC and the current condition for paved roads in green for good (PASER 10, 9, 8), yellow for fair (PASER 7, 6, 5), and red for poor (PASER 4, 3, 2, 1) and for unpaved roads in blue

Of CCRC's 714.106 miles of road, 179.067 miles are classified as county primary and 535.039 miles are classified as county local (Figure 1 identifies these paved roads in green, yellow, and red with the colors being determined based on the road segment's condition). CCRC also manages 5.728 miles that are classified as part of the National Highway System (NHS); the NHS is subject to special rules and regulations and has its own performance metrics dictated by the FHWA. In addition, CCRC has 36.945 miles of unpaved roads (Figure 1 identifies these unpaved roads in blue).

More detail about these road assets can be found in CCRC's Roadsoft database or by contacting CCRC.

## Types

CCRC has multiple types of pavements in its jurisdiction, including asphalt, concrete, and undefined; it also has unpaved roads (i.e., gravel and/or earth). Figure 2 shows a breakdown of these pavement types for all of CCRC's road assets.

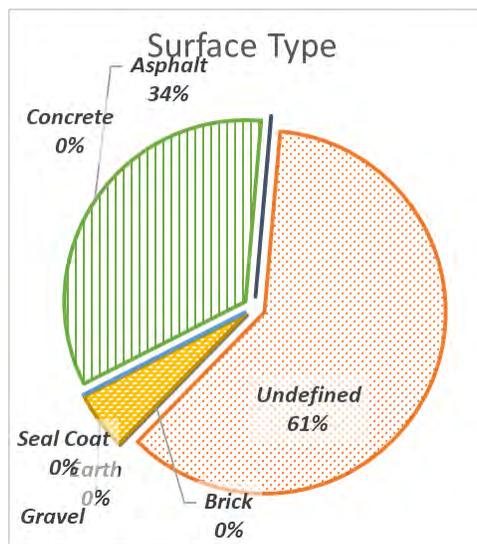


Figure 2: Pavement type by percentage maintained by CCRC. Undefined pavements have not been inventoried in CCRC's asset management system to date, but will be included as data becomes available.

## Condition, Goals, and Trend

### Paved Roads

Paved roads in Michigan are rated using the Pavement Surface Evaluation and Rating (PASER) system, which is a 1 to 10 scale with 10 being a newly constructed surface and 1 being a completely failed

surface. PASER scores are grouped into TAMC definition categories of good (8-10), fair (5-7), and poor (1-4) categories. CCRC collects PASER data every two years on 100 percent of those portions of its county primary and county local networks that are eligible for federal funding. The CCRC has not collected PASER data on its paved non-federal-aid-eligible network due to limited staffing.

Currently, the county primary network has 18% of its roads in good condition, 12% in fair condition, and 70% in poor condition (Figure 3). CCRC’s long-range goal for the county primary network is to have 24% of roads in good condition, 18% in fair condition, and 58% in poor condition (Figure 3). Figure 3 illustrates the historical and current condition (solid bars) of CCRC’s county primary network, and the projected trend (shaded bars), the overall trend in condition (trendlines), and CCRC’s goal (final solid bar).

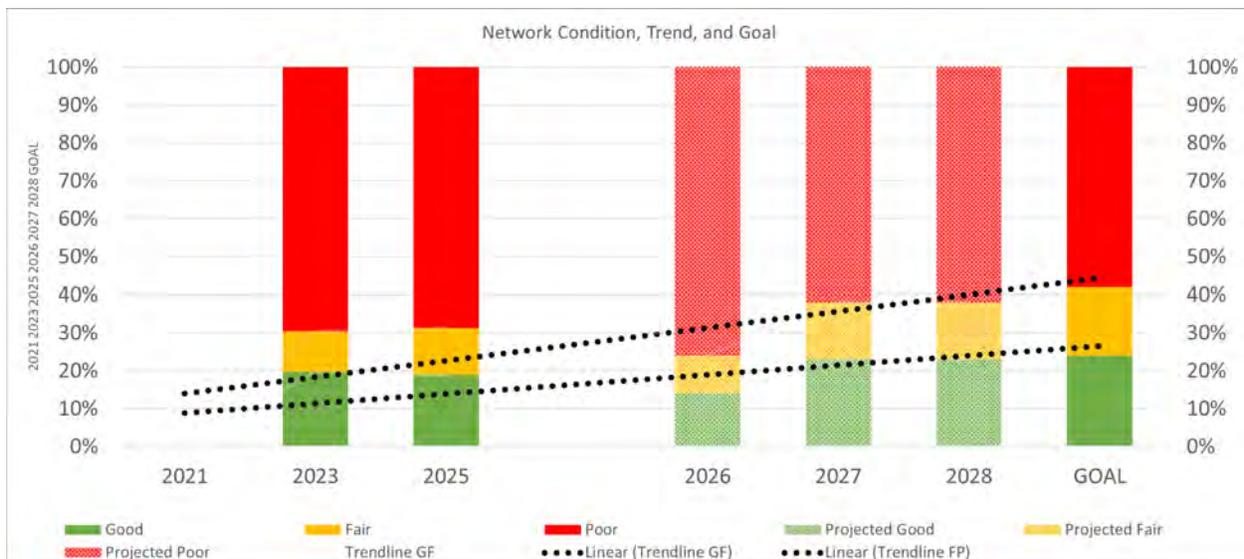


Figure 3: county primary network condition, goals, and trend

## Unpaved Roads

Unpaved roads rated with the Inventory-based Rating System™ receive an IBR number ranging from 1 to 10, with a 9 or 10 (less than one year old) having good surface width, good or fair drainage, and good structural adequacy and a 1 having poor surface width, poor drainage, and poor structural adequacy. IBR numbers can be grouped in a similar fashion as the TAMC definitions into good (8-10), fair (5-7), and poor (1-4) categories. Figure 5 illustrates the historical and/or current condition (solid bar[s]), the projected trend (shaded bars), and CCRC’s goal (final solid bar).

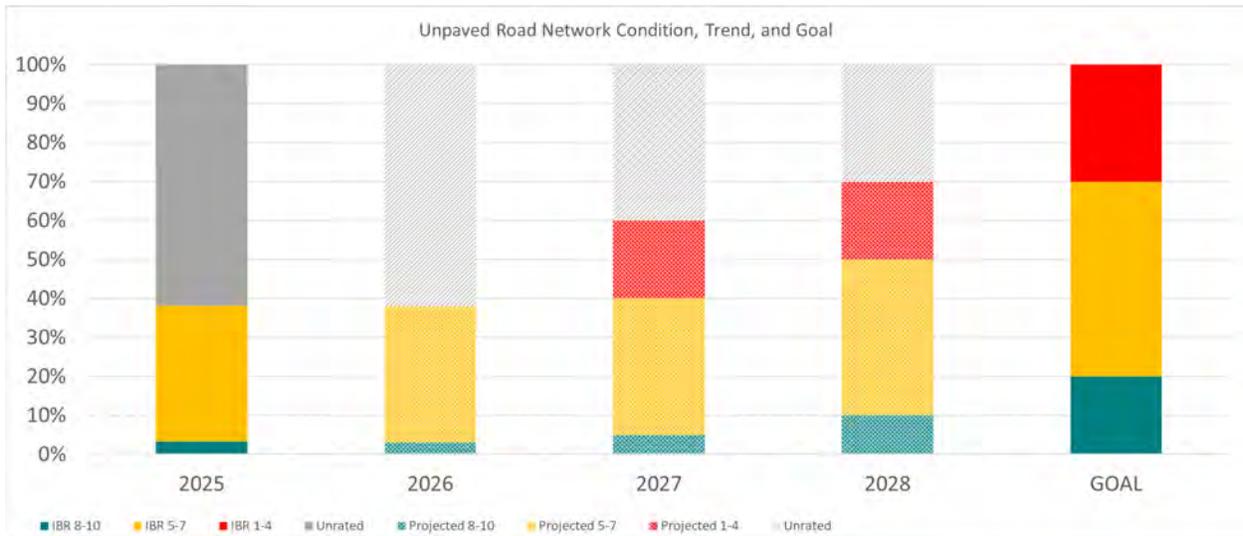


Figure 5: Distribution of IBR numbers for current condition (solid) and for goals (dotted)

## Modelled Trends, Gap Analysis, and Planned Projects

Table 1: NCPP Modelled Trends, Planned Projects, and Gap Analysis for 's Road Assets							
Network 1 (<179.067 miles)							
Treatment	Average Yearly Miles of Treatment	Years of Life	Mile-Years	Planned Projects		Average Yearly Miles of Treatment	Mile-Years
				Average Yearly Miles of Treatment	Mile-Years		
		1					
		2					
		7					
		10					
Mill & Overlay		10					
Crush & Shape	5	25	125	5	125	2	50
[Treatment 7]							
[Treatment 8]							
Total			125		125		50
Gap Analysis: (Deficit)/Surplus			-33		-33		17
Network 2 (535.039 miles)							
Treatment	Average Yearly Miles of Treatment	Years of Life	Mile-Years	Planned Projects		Additional Work Necessary to Overcome Deficit	
				Average Yearly Miles of Treatment	Mile-Years	Average Yearly Miles of Treatment	Mile-Years
		1					
		2					
		7					
		10					
Mill & Overlay		10					
Crush & Shape	2	20	40	2	40		
[Treatment 7]							
[Treatment 8]							
Total			40		40		
Gap Analysis: (Deficit)/Surplus			39		39		

### Modelled Trends & Gap Analysis

Results from the NCPP Quick Check for the paved county primary network roads indicate the average volume of work that CCRC has been able to afford over the last five years is not keeping up with the natural deterioration of the road network due to age and use. Continuing the current treatment volume on this network will result in an ongoing deficit of 33 mile-years of project benefit needed to stabilize this trend and maintain current conditions. At this time a NCPP quick analysis of the county local network shows a surplus of mile-years of project benefit. However, the CCRC has completed a full inventory and assessment of it's county local network. Once that inventory and assessment process is complete it may reveal different results.

The NCPP analysis of CCRC's planned projects from CCRC's currently-available budget does not allow CCRC to head in the direction of its pavement condition goal given the projects planned for the county primary and county local networks over the next three years. The decrease in MTF funding due to decreased travel and improved fuel efficiency of vehicles and increases in construction costs due to inflation have directly attributed to this deficit. As construction costs stabilize or decrease, additional annual miles of treatments would eliminate this gap.

The NCPP Quick Check method shows that there will be a deficit of 33 mile-years of improvement on the paved county primary road network. To maintain current road conditions, this deficit must be overcome with a combination of maintenance and construction work. This additional work to make up this deficit would cost approximately \$1,000,000 per year. An accurate analysis of the county local system is not possible until CCRC completes the inventory and assessment process for the network.

### Planned Projects

CCRC has projects planned for the next three years. These projects are identified in Figure 6.


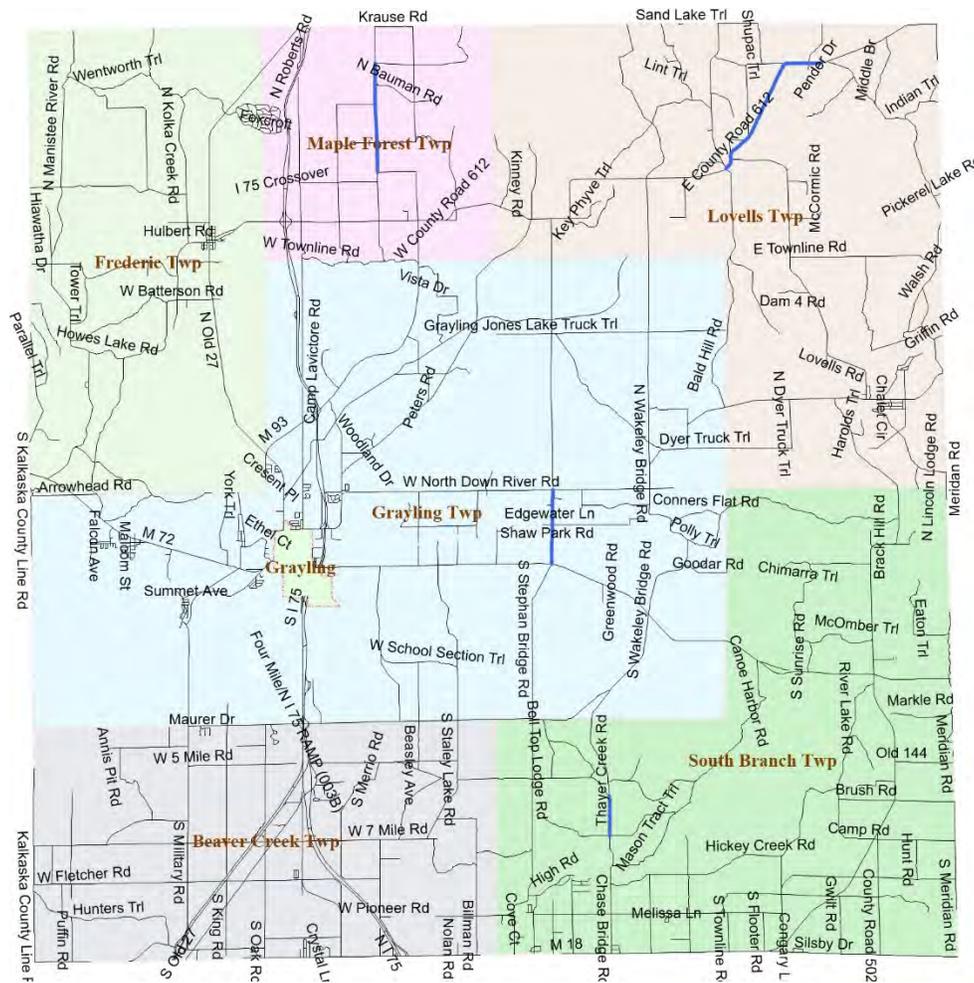


Figure 6 : Map illustrating planned projects for pavement assets

The total cost of the projects illustrated in Figure 6 is approximately \$2,300,000.

## 2. BRIDGE ASSETS

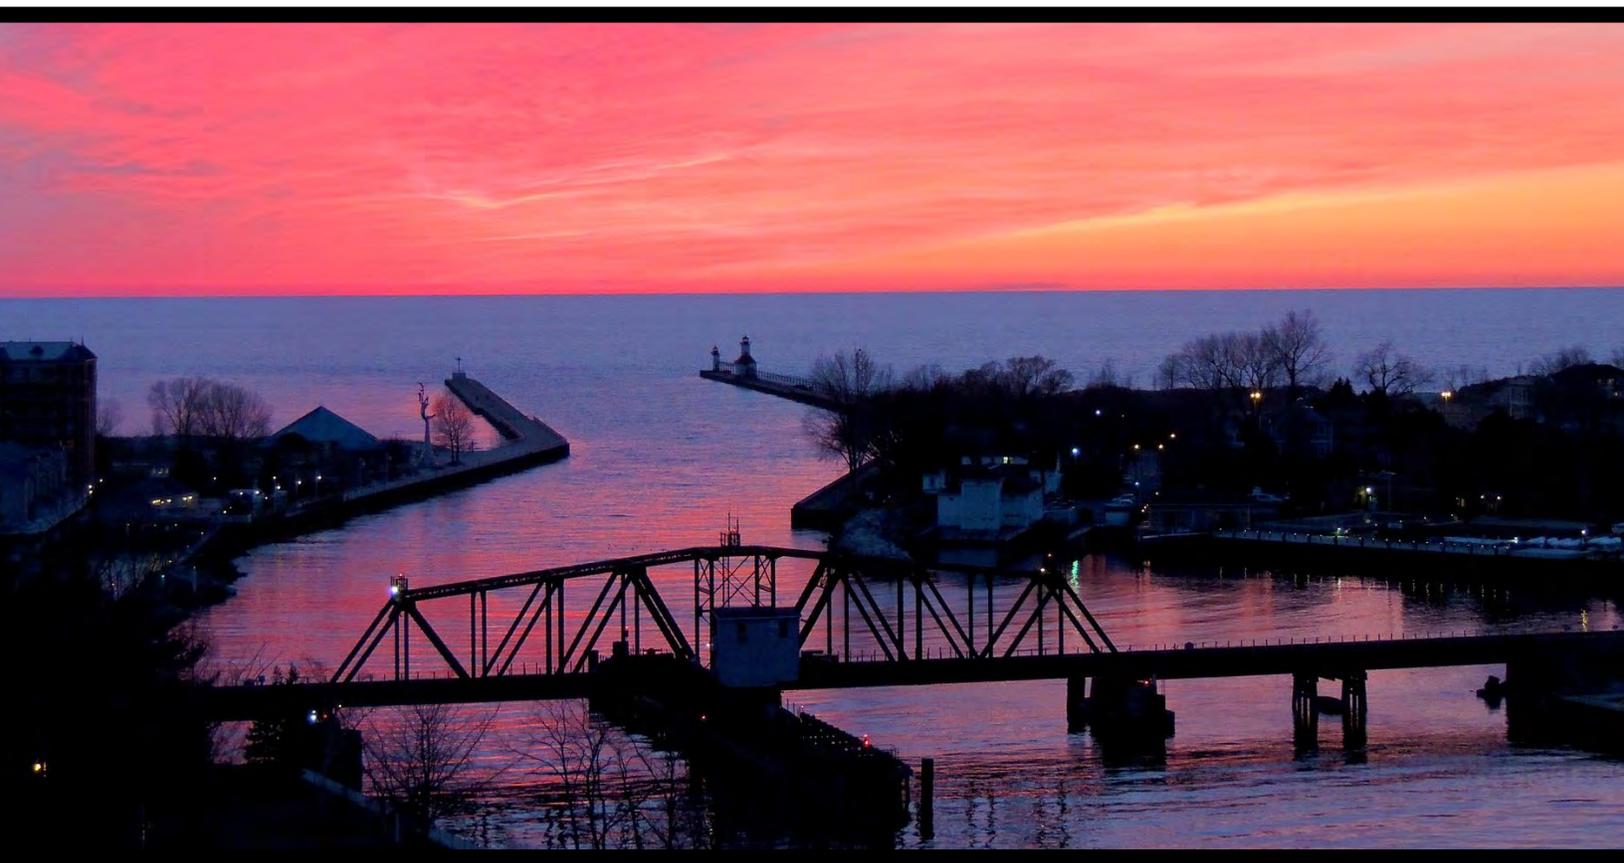

CCRC is responsible for 21 bridges that provide safe service to road users across the agency network. CCRC seeks to implement a cost-effective program of preventive maintenance to maximize the useful service life and safety of the local bridges under its jurisdiction.

## Inventory of Assets

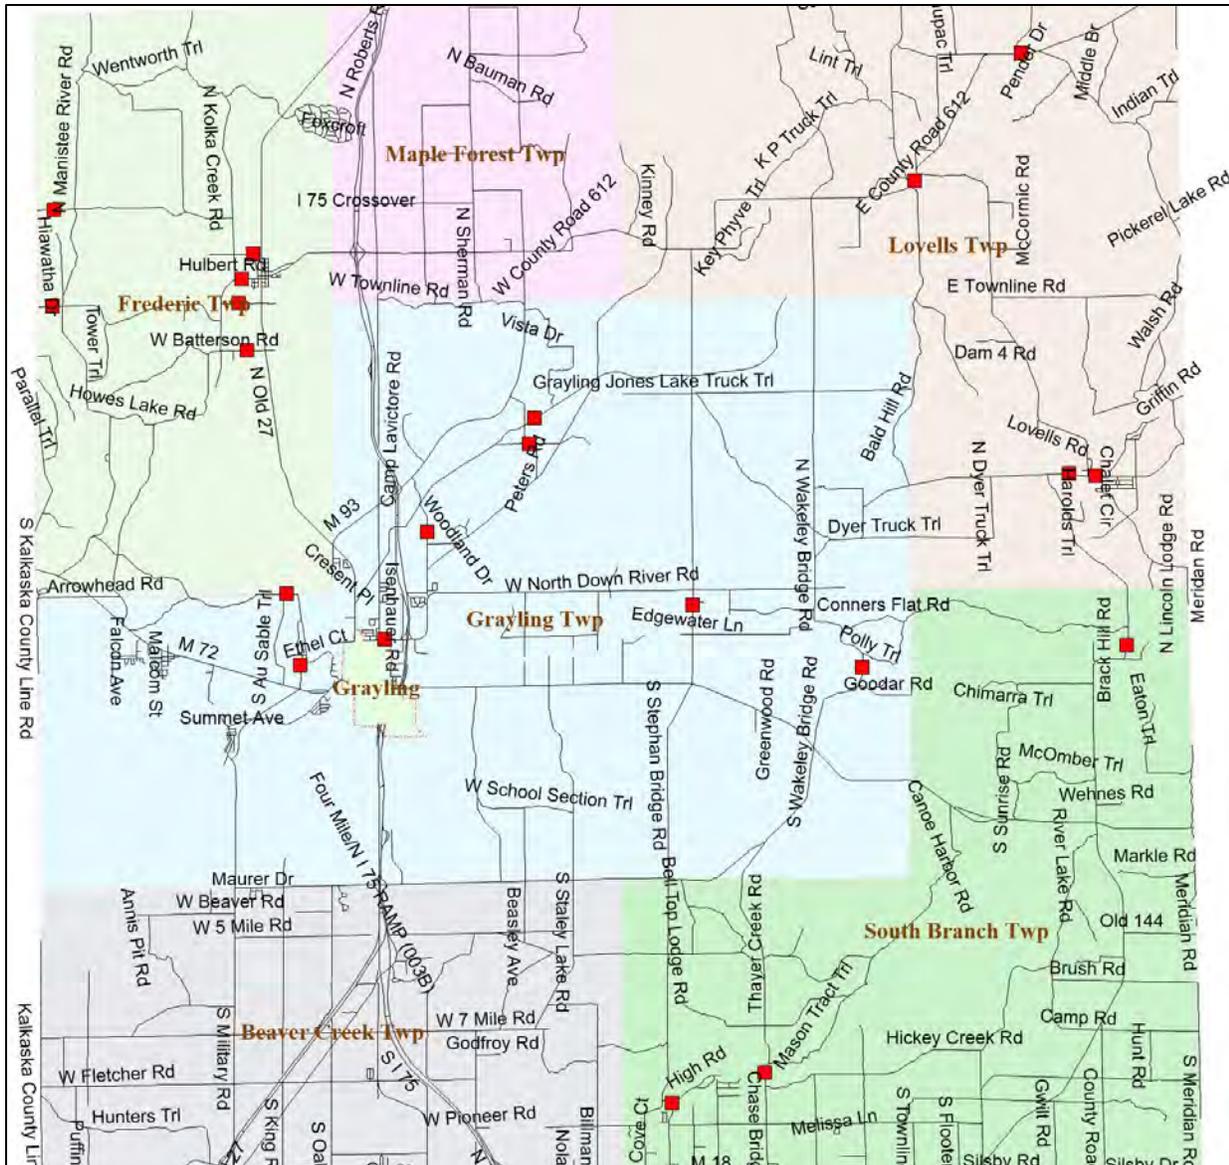


Figure 7: Map illustrating locations of CCRC's bridge assets

CCRC has 21 total bridges in its road and bridge network; these bridges connect various points of the road network, as illustrated in Figure 7. These bridge structures can be summarized by type, size, and condition, which are detailed in

Table 2. More information about each of these structures can be found in CCRC's MiBRIDGE database or by contacting CCRC.



bridge's deficiencies and to ensure the safety of road users. The current condition of CCRC's bridge network based on the NBIS is 8 structures rated good, 12 structures rated fair, and 1 structures rated poor (Table 2).

Bridges are designed to carry legal loads in terms of vehicles and traffic. Due to a decline in condition, a bridge may be "posted" with a restriction for what would be considered safe loads passing over the bridge. On occasion, posting a bridge may also restrict other load-capacity-related elements like speed and number of vehicles on the bridge, but this type of posting designates the bridge differently. CCRC has 2 structures that are posted for load restriction (Table 2). Designating a bridge as "posted" has no influence on its condition rating. A "closed" bridge is one that is closed to all traffic. Closing a bridge is contingent upon its ability to carry a set minimum live load. CCRC has 0 structures that are closed (Table 2).

The goal of the program is the preservation and safety of CCRC's bridge network.

Figure 8 illustrates the baseline condition, projected trend, and goal that CCRC has for its good/fair and its structurally deficient bridges.

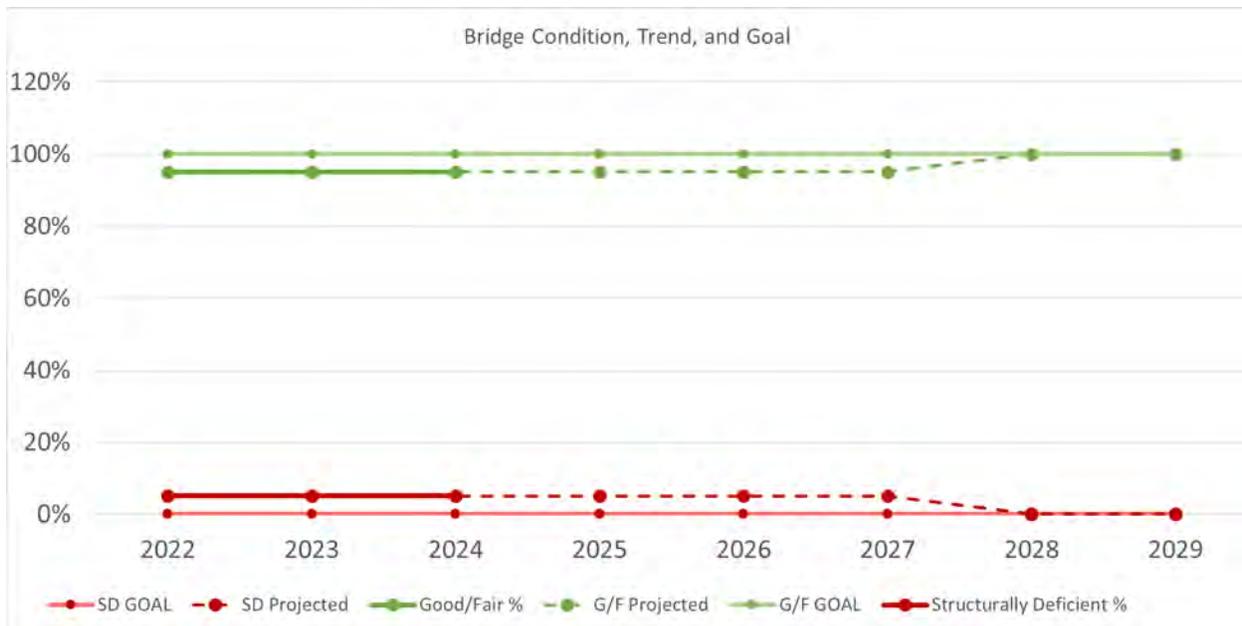


Figure 8: Condition, projected trend, and goal for CCRC's good/fair and structurally deficient bridges

## Programmed/Funded Projects, Gap Analysis, and Planned Projects

CCRC will receive \$ in total funding for the years 2026-2028. Preventive maintenance is a more effective use of these funds than the costly alternative of major rehabilitation or replacement. Since CCRC recognizes that limited funds are available for improving the bridge network, it seeks to identify those bridges that will benefit from a planned maintenance program, and it plans to spend \$ per year for the next three years on preventive maintenance of bridges. CCRC plans to replace one bridges within the next three years at a cost of \$1,800,000 . By performing the aforementioned preventive maintenance and replacement of bridge structures, CCRC may or may not achieve its goal of keeping its overall bridge network at the same condition.

Table 3 illustrates the programmed/funded projects that will be undertaken in order to achieve CCRC's goal. These programmed/funded projects are juxtaposed with priority projects that remain unfunded.

**Table 3: Planned Projects and Gap Analysis**

<b>Strategy</b>	<b>2025</b>	<b>2026</b>	<b>2027</b>	<b>2028</b>	<b>2029</b>	<b>GAP</b>
<b>New</b>						
Subtotal	\$0	\$0	\$0	\$0	\$0	\$0
<b>Replacement</b>						
2067				\$1,800,000		
Subtotal	\$0	\$0	\$0	\$1,800,000	\$0	\$0
<b>Rehabilitation</b>						
Subtotal	\$0	\$0	\$0	\$0	\$0	\$0
<b>Scheduled Maintenance</b>						
Subtotal	\$0	\$0	\$0	\$0	\$0	\$0
<b>Preventive Maintenance</b>						
Subtotal	\$0	\$0	\$0	\$0	\$0	\$0
<b>Other</b>						
Subtotal	\$0	\$0	\$0	\$0	\$0	\$0

# 3. CULVERT ASSETS



CCRC exercises awareness of its culvert assets. CCRC replaces culverts on an as needed basis. While planning for construction projects, CCRC will review the culverts inventoried within the project scope and determine if replacement is warranted.

## **Inventory of Assets**

At present, CCRC tracks inventory data of its culvert assets only. CCRC has inventoried 66 culverts, which is 66 percent of the estimated 100 culverts that CCRC owns.

The CCRC has not yet assessed the condition of its culverts but hopes to begin that process in the coming years. CCRC will assess culvert conditions using the rating system detailed in Appendix C Culvert Asset Management Plan Supplement.

More detail about these culvert assets can be found in CCRC's Roadsoft database or by contacting CCRC.

## **Goals**

The goal of CCRC's asset management program is the preservation of its culvert network. CCRC is responsible for preserving 66 inventoried culverts as well as any un-inventoried culverts that underlie its entire road network.

## **Planned Projects**

CCRC's policy is to replace or repair culvert assets concurrent with projects affecting road segments carried by the particular culverts. CCRC also includes culvert assets in scheduled maintenance projects affecting road segments carried by the particular culverts.

# 4. SIGNAL ASSETS



CCRC exercises awareness of its traffic sign and signal assets.

## **Inventory of Assets**

At present, CCRC tracks only inventory data for traffic signals. CCRC has inventoried 15 traffic signals, which is 150 percent of the actual 10 traffic signals that CCRC owns.

More detail about these traffic signal assets can be obtained by contacting CCRC.

## **Goals**

The goal of CCRC's asset management program is the preservation of its traffic signals. CCRC is responsible for preserving 15 inventoried traffic signals as well as any un-inventoried traffic signals along its entire road network.

## **Planned Projects**

CCRC's policy is to evaluate traffic signal assets based on condition assessment for replacement or repair during any reconstruction, rehabilitation, preventive maintenance, or schedule maintenance activities on the roadway affected by the particular signal. It also conducts replacements or repairs for those traffic signal assets reported as non-functional or as performing with reduced function. CCRC adheres to regular maintenance and servicing policies outlined in the *Michigan Manual of Uniform Traffic Control Devices*.

# 5. FINANCIAL RESOURCES

Public entities must balance the quality and extent of services they can provide with the tax resources provided by citizens and businesses, all while maximizing how efficiently funds are used. Therefore, CCRC will overview its general expenditures and financial resources currently devoted to transportation infrastructure maintenance. This financial information is not intended to be a full financial disclosure or a formal report. Full details of CCRC's financial status can be found on our website at [crawford-crc.com](http://crawford-crc.com).

## Anticipated Revenues & Expenses

CCRC receives funding from the following sources:

- **State funds** – CCRC's principal source of transportation funding is received from the Michigan Transportation Fund (MTF). This fund is supported by vehicle registration fees and the state's per-gallon gas tax. Allocations from the MTF are distributed to state and local governmental units based on a legislated formula, which includes factors such as population, miles of certified roads, and vehicle registration fees for vehicles registered in the agency's jurisdiction. CCRC also receives revenue from the Michigan Department of Transportation to maintain (e.g. plow, patch, mow) the state trunklines within its jurisdictional boundary. Revenue from these maintenance contracts are received on a time and materials basis as resources are expended to maintain the State's roads. While these contracts do not allow for capital gain (profit) and only bring in revenue to cover the cost of the work, they do provide a benefit to CCRC by allowing an economy of scale that enables us to provide better service at a lower cost for CCRC's roads while allowing the same for the State of Michigan. Examples of state grants also include local bridge grants, economic development funds, and metro funds.

- **Federal and state grants for individual projects** – These are typically competitive funding applications that are targeted at a specific project type to accomplish a specific purpose. These may include safety enhancement projects, economic development projects, or other targeted funding. Examples of federal funds include Surface Transportation Program (STP) funds, C and D funds, bridge funds, MDOT payments to private contractors, and negotiated contracts.
- **Local government entities or private developer contributions to construction projects for specific improvements** – This category includes funding received to mitigate the impact of commercial developments as a condition of construction of a specific development project, and can also include funding from a special assessment district levied by another governmental unit. Examples of contributions from local units include city, village, and township contributions to the county; special assessments; county appropriations; bond and note proceeds; contributions from counties to cities and villages; city general fund transfers; city municipal street funds; capital improvement funds; and tax millages (see below).
- **Local tax millages** – Many local agencies in Michigan use local tax millages to supplement their road-funding budget. These taxes can provide for additional construction and maintenance for new or existing roads that are also funded using MTF or MDOT funds. CCRC has local tax millages in its road-funding budget. The county-wide road millage can only be used on primary road improvement, matching funds, and engineering costs.
- **Interest** – Interest from invested funds.
- **Permit fees** – Generally, permit fees cover the cost of a permit application review.
- **Other** – Other revenues can be gained through salvage sales, property rentals, land and building sales, sundry refunds, equipment disposition or installation, private sources, and financing.
- **Charges for services** – Funds from partner agencies who contract with CCRC to construct or maintain its roads, or roads under joint or neighboring jurisdictions, including state trunkline maintenance and non-maintenance services and preservation.

CCRC is required to report transportation fund expenditures to the State of Michigan using a prescribed format with predefined expenditure categories. The definitions of these categories according to Public Act 51 of 1951 may differ from common pavement management nomenclature and practice. For the purposes of reporting under PA 51, the expenditure categories are:

- **Construction/Capacity Improvement Funds** – According to PA 51 of 1951, this financial classification of projects includes, “new construction of highways, roads, streets, or bridges, a project that increases the capacity of a highway facility to accommodate that part of traffic having neither an origin nor destination within the local area, widening of a lane width or more, or adding turn lanes of more than 1/2 mile in length.”<sup>1</sup>
- **Preservation and Structural Improvement Funds** – Preservation and structural improvements are “activit[ies] undertaken to preserve the integrity of the existing roadway system.”<sup>2</sup>

---

<sup>1</sup> Public Act 51 of 1951, 247.660c Definitions

<sup>2</sup> Public Act 51 of 1951, 247.660c Definitions

Preservation includes items such as a reconstruction of an existing road or bridge, or adding structure to an existing road.

- **Routine and Preventive Maintenance Funds** – Routine maintenance activities are “actions performed on a regular or controllable basis or in response to uncontrollable events upon a highway, road, street, or bridge”.<sup>3</sup> Preventive maintenance activities are “planned strategy[ies] of cost-effective treatments to an existing roadway system and its appurtenances that preserve assets by retarding deterioration and maintaining functional condition without significantly increasing structural capacity”.<sup>4</sup>
- **Winter Maintenance Funds** – Expenditures for snow and ice control.
- **Trunkline Maintenance Funds** – Expenditures spent under CCRC’s maintenance agreement with MDOT for maintenance it performs on MDOT trunkline routes.
- **Administrative Funds** – There are specific items that can and cannot be included in administrative expenditures as specified in PA 51 of 1951. The law also states that the amount of MTF revenues that are spent on administrative expenditures is limited to 10 percent of the annual MTF funds that are received.
- **Other Funds** – Expenditures for equipment, capital outlay, debt principal payment, interest expense, contributions to adjacent governmental units, principal, interest and bank fees, and miscellaneous for cities and villages.

The Table (below) details the revenues and expenditures for CCRC.

**Table 4: Annual Fiscal-Year Revenues & Expenditures per Fiscal Year**

REVENUES			EXPENDITURES		
Item	Estimated \$	Percent of Total	Item	Estimated \$	Percent of Total
State funds	\$7,022,140	59.3	Construction & capacity improvement (CCI)	\$0	0.0
Federal funds	\$1,862,845	15.7	Preservation & structural improvement (PSI)	\$4,162,202	33.9
Contributions for local units	\$712,176	6.0	Routine maintenance	\$1,567,339	12.8
Interest, rents, and other	\$1,266,022	10.7	Winter maintenance	\$1,205,367	9.8
Charges for services	\$969,453	8.2	Trunkline maintenance	\$1,266,022	10.3
			Administrative	\$497,906	4.1
			Other	\$3,568,671	29.1
<b>TOTAL</b>	<b>\$11,832,636</b>	<b>100</b>	<b>TOTAL</b>	<b>\$12,267,507</b>	<b>100</b>

Verify the information in this table. You can find your agency's information in the TAMC dashboard at <https://www.mcqi.state.mi.us/mitrp/tamcDashboards>.

<sup>3</sup> Public Act 51 of 1951, 247.660c Definitions

<sup>4</sup> Public Act 51 of 1951, 247.660c Definitions

# 6. RISK OF FAILURE ANALYSIS

Transportation infrastructure is designed to be resilient. The system of interconnecting roads and bridges maintained by CCRC provides road users with multiple alternate options in the event of an unplanned disruption of one part of the system. There are, however, key links in the transportation system that may cause significant inconvenience to users if they are unexpectedly closed to traffic. Key transportation links include:

- **Geographic divides:** Areas where a geographic feature (river, lake, hilly terrain, or limited access road) limits crossing points of the feature; bridge failures, in particular, can create loss of access to entire regions of the state
- **Emergency alternate routes for high-volume roads and bridges:** Roads and bridges that are routinely used as alternate routes for high-volume assets are included in an emergency response plan
- **Limited access areas:** Roads and bridges that serve remote or limited access areas that result in long detours if closed
- **Main access to key commercial districts:** Areas with a large concentration of businesses or where large-size business will be significantly impacted if a road is unavailable
- Our road and bridge network includes the following critical assets: 4 Mile Road, North Down River Road, County Road 612, South Military Road, Old 27, and Sherman Road, and bridge numbers 2060, 2063, and 2067. Figure 9 illustrates the key transportation links in CCRC's road and bridge network.

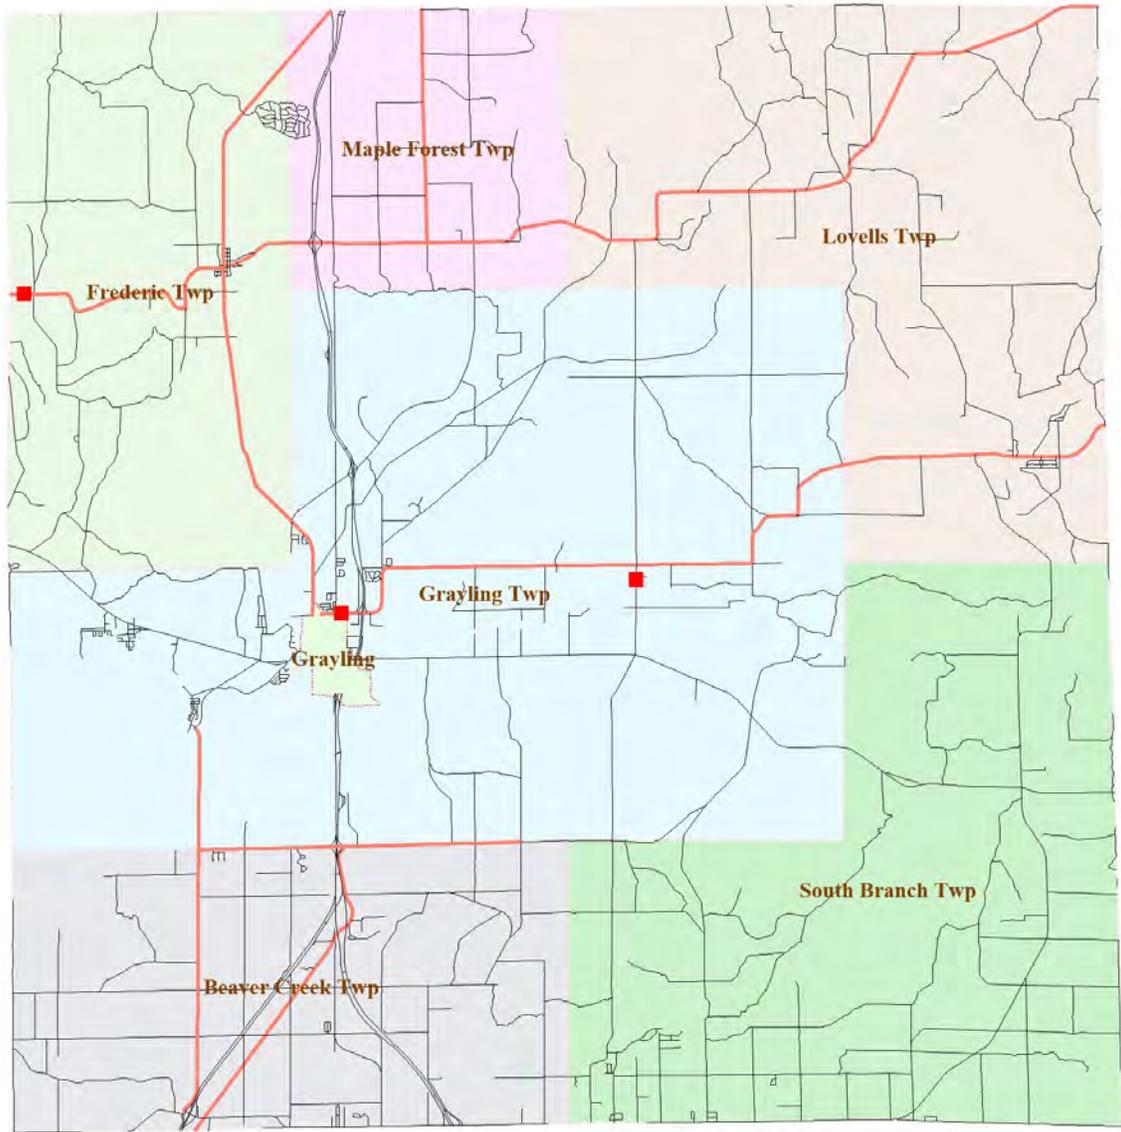


Figure 9: Key transportation links in CCRC's road and bridge network

# 7. COORDINATION WITH OTHER ENTITIES

An asset management plan provides a significant value for infrastructure owners because it serves as a platform to engage other infrastructure owners using the same shared right of way space. CCRC communicates with both public and private infrastructure owners to coordinate work in the following ways:

1. CCRC requires permits before the installation of any utility or work in the ROW.
2. CCRC informs utility owners during the project planning phase to discuss any possible conflicts that will need to be addressed during the design and engineering process.
3. CCRC contacts all utility owners during the project planning phase to determine if the utility has any future planned upgrade or replacement projects.

## PLANNING

Annually CCRC convenes an infrastructure planning summit in the last quarter of the year to take public comment on future Rural Task Force Projects. Representatives from all of the major public and private infrastructure owners that have assets in the road right of way are provided notice for the meeting and are invited to attend along with the public.

CCRC provides all attendees of the infrastructure planning summit with a list of all planned road projects for the next three years that include new pavement structure. Infrastructure owners are encouraged to discuss planned projects that would disrupt transportation services or cause damage to pavements. Projects which may cause damage to pavements in good or fair condition are discussed and mitigation

measures are proposed to minimize the impact to pavements. Mitigation measures could include rescheduling and coordinating projects to maximize value and minimize disruptions and cost to the public

# 8. PROOF OF ACCEPTANCE

## PUBLIC ACT 325

### CERTIFICATION OF TRANSPORTATION ASSET MANAGEMENT PLAN

Certification Year: 2025

Local Road-owning Agency Name: Crawford County Road Commission

Beginning October 2019 and on a three-year cycle thereafter, certification must be made for compliance to Public Act 325. A local road-owning agency with 100 certified miles or more must certify that it has developed an asset management plan for the road, bridge, culvert, and traffic signal assets. Signing this form certifies that the hitherto referred agency meets with minimum requirements as outlined by Public Act 325 and agency-defined goals and objectives.

This form must be signed by the chairperson of the local road-owning agency or the county executive and chief financial officer of the local road-owning agency.

Signature		Signature	
Ryan Halstead		Printed Name	
Chairman	Date November 6, 2025	Title	Date

Due every three years based on agency submission schedule

Submittal Date: November 6, 2025 See attached council meeting minutes and/or resolution.



## **A. PAVEMENT ASSET MANAGEMENT PLAN**

An attached pavement asset management plan follows.

# Crawford County Road Commission 2025 Pavement Asset Management Plan

A plan describing the Crawford County Road Commission's roadway assets and conditions

*Prepared by:*  
Donald Babcock  
Managing Director  
Crawford County Road Commission



# CONTENTS

- Table of Figures ..... i
- Table of Tables ..... iii
- Executive Summary ..... iv
- Introduction..... 1
  - Pavement Primer* ..... 2
- 1. Pavement Assets ..... 12
  - Inventory* ..... 13
  - Goals*..... 27
  - Modelled Trends* ..... 28
  - Planned Projects*..... 32
  - Gap Analysis* ..... 35
- 2. Financial Resources ..... 38
  - County Primary Network* ..... 38
  - County Local Network* ..... 38
- 3. Risk of Failure Analysis..... 40
- 4. Coordination with Other Entities ..... 42
- Planning ..... 42
- Appendix A: 2026-2028 Paved County Primary Road Planned Projects ..... 44
- Appendix B: 2026-2028 Paved County Local Road Planned Projects ..... 45
- Appendix C: 2026-2028 Unpaved Road Planned Projects ..... 46
- Appendix D: A Quick Check of Your Highway Network Health ..... 47
- Appendix e: Meeting Minutes Verifying Plan Acceptance by Governing Body ..... 53

# TABLE OF FIGURES

Figure 1: *Top image, right*– PASER 8 road that is considered “good” by the TAMC exhibit only minor defects. *Second image, right*– PASER 5 road that is considered “fair” by the TAMC. Exhibiting structural soundness but could benefit from CPM. *Third image, right*– PASER 6 road that is considered “fair” by the TAMC. *Bottom image, right*– PASER 2 road that is considered “poor” by the TAMC exhibiting significant structural distress. ....5

Figure 2: *Top*– Road with IBR number of 1 road that has poor surface width, poor drainage adequacy, and poor structural adequacy. *Middle*– Road IBR number of 7 that has fair surface width, fair drainage adequacy, and fair structural adequacy. *Bottom*– Road with IBR number of 9 road that has good surface width, good drainage adequacy, and good structural adequacy.....6

Figure 3: Examples of reconstruction treatments—(left) reconstructing a road and (right) road prepared for full-depth repair. ....7

Figure 4: Examples of structural improvement treatments—(from left) HMA overlay on an unmilled pavement, milling asphalt pavement, and pulverization of a road during a crush-and-shape project.....8

Figure 5: Examples of capital preventive maintenance treatments—(from left) crack seal, fog seal, chip seal, and slurry seal/microsurface.....9

Figure 6: Examples of capital preventive maintenance treatments, cont’d—(from left) concrete road prepared for partial-depth repair, gravel road undergoing maintenance grading, and gravel road receiving dust control application (dust control photo courtesy of Weld County, Colorado, weldgov.com). ....10

Figure 7: Map showing location of CCRC’s paved roads (i.e., those managed by CCRC) and their current condition for paved roads with green for good (i.e., PASER 10, 9, 8), yellow for fair (i.e., PASER 7, 6, 5), and red for poor (i.e., PASER 4, 3, 2, 1), as well as the location of CCRC’s unpaved roads in blue.....13

Figure 8: Percentage of county primary and county local roads for CCRC. ....14

Figure 9: county primary and county local roads by township for CCRC’s jurisdiction.....14

Figure 10: Miles of roads managed by CCRC that are part of the National Highway System and condition.....15

Figure 11: Pavement type by percentage maintained by CCRC Undefined pavements have not been inventoried in CCRC’s asset management system to date, but will be included as data becomes available.....15

Figure 12: Pavement type by township within CCRC’s jurisdiction. Undefined pavements have not been inventoried in CCRC’s asset management system to date, but will be included as data becomes available.....16

Figure 13: CCRC paved county primary road network conditions by percentage of good, fair, or poor. ....17

Figure 14: Statewide paved county primary road network conditions by percentage of good, fair, or poor .....18

Figure 15: CCRC paved county primary road network conditions. Bar graph colors correspond to good/fair/poor TAMC designations. ....19

Figure 17: Number of miles of paved road in each township divided in categories of good (PASER 10, 9, 8), fair (PASER 7, 6, 5), and poor (PASER 4, 3, 2, 1). ....19

Figure 18: Map of the current paved road condition in good (PASER 10, 9, 8) shown in green, fair (PASER 7, 6, 5) shown in yellow, and poor (PASER 4, 3, 2, 1) shown in red. Only Roads owned by CCRC are shown. ....	20
Figure 19: Historical CCRC paved county primary road network condition trend .....	21
Figure 20: Historical statewide county primary road network condition trend .....	21
Figure 21: CCRC’s unpaved road network condition by percentage of roads with IBR numbers of 10, 9, and 8; roads with IBR numbers of 7, 6, and 5; and IBR numbers of 4, 3, 2, and 1. ....	22
Figure 22: Number of miles of unpaved road in each township divided in categories of roads with IBR numbers of 10, 9, and 8; IBR numbers of 7, 6, and 5; and IBR numbers of 4, 3, 2, and 1. ....	23
Figure 23: Map of the current IBR for surface width with good (22’ and greater) shown in green, fair (16’ to 21’) shown in orange, and poor (15’ or less) shown in red. Only unpaved roads owned by CCRC are shown. ....	24
Figure 24: Map of the current IBR for drainage adequacy with good (2’ or more) shown in green, fair (0.5’ to less than 2’) shown in orange, and poor (less than 0.5’) shown in red. Only unpaved roads owned by CCRC are shown. ....	25
Figure 25: Map of the current IBR structural adequacy good (greater than 7”) shown in green, fair (4” to 7”) shown in orange, and poor (less than 4”) shown in red. Only unpaved roads owned by CCRC are shown. ....	26
Figure 26: CCRC’s 2025 county primary road network condition by percentage of good/fair/poor .....	27
Figure 27: CCRC’s 2025 unpaved road network condition by percentage of good/fair/poor .....	28
Figure 28: Map showing paved county primary road projects planned for 2026. ....	33
Figure 29: Map showing paved county primary road projects planned for 2027. ....	34
Figure 30: Map showing paved county primary road projects planned for 2028. ....	34
Figure 31: Key transportation links in CCRC’s road network. ....	41

# TABLE OF TABLES

Table 1: Service Life Extension (in Years) for Pavement Types Gained by Fix Type<sup>1</sup> .....30

Table 2: NCPP Modelled Trends, Planned Projects, and Gap Analysis for 's Road Assets—  
 Modelled Trends: NCPP Quick Check Method for Paved County Primary Road Network  
 (179.067 miles).....31

Table 3: NCPP Modelled Trends, Planned Projects, and Gap Analysis for 's Road Assets—  
 Modelled Trends: NCPP Quick Check Method for Paved County Local Road Network  
 (535.039 miles).....32

Table 4: NCPP Modelled Trends, Planned Projects, and Gap Analysis for 's Road Assets—  
 Planned Projects and Gap Analysis: NCPP Quick Check Method for Paved County  
 Primary Road Network (179.067 miles).....36

Table 5: NCPP Modelled Trends, Planned Projects, and Gap Analysis for 's Road Assets—  
 Planned Projects and Gap Analysis: NCPP Quick Check Method for Paved County Local  
 Road Network (535.039 miles) .....37


# EXECUTIVE SUMMARY

As conduits for commerce and connections to vital services, roads are among the most important assets in any community along with other assets like bridges, culverts, traffic signs, traffic signals, and utilities that support and affect roads. The Crawford County Road Commission's (CCRC) roads, other transportation assets, and support systems are also some of the most valuable and extensive public assets, all of which are paid for with taxes collected from ordinary citizens and businesses. The cost of building and maintaining roads, their importance to society, and the investment made by taxpayers all place a high level of responsibility on local agencies to plan, build, and maintain the road network in an efficient and effective manner. This asset management plan is intended to report on how CCRC is meeting its obligations to maintain the public assets for which it is responsible.


This plan overviews CCRC's road assets and condition, and explains how CCRC works to maintain and improve the overall condition of those assets. These explanations can help answer the following questions:

- What kinds of road assets CCRC has in its jurisdiction, who owns them, and the different options for maintaining these assets.
- What tools and processes CCRC uses to track and manage road assets and funds.
- What condition CCRC's road assets are in compared to statewide averages.
- Why some road assets are in better condition than others and the path to maintaining and improving road asset conditions through proper planning and maintenance.
- How agency transportation assets are funded and where those funds come from.
- How funds are used and the costs incurred during CCRC's road assets' normal life cycle.
- What condition CCRC can expect its road assets if those assets continue to be funded at the current funding levels
- How changes in funding levels can affect the overall condition of all of CCRC's road assets.

CCRC owns and/or manages 714.106 centerline of roads. This road network can be divided into the county primary network, the county local network, the unpaved road network, and the National Highway System (NHS) network based on the different factors these roads have that influence asset management decisions. A summary of CCRC historical and current network conditions, projected trends, and goals for county primary network can be seen in the figure below:

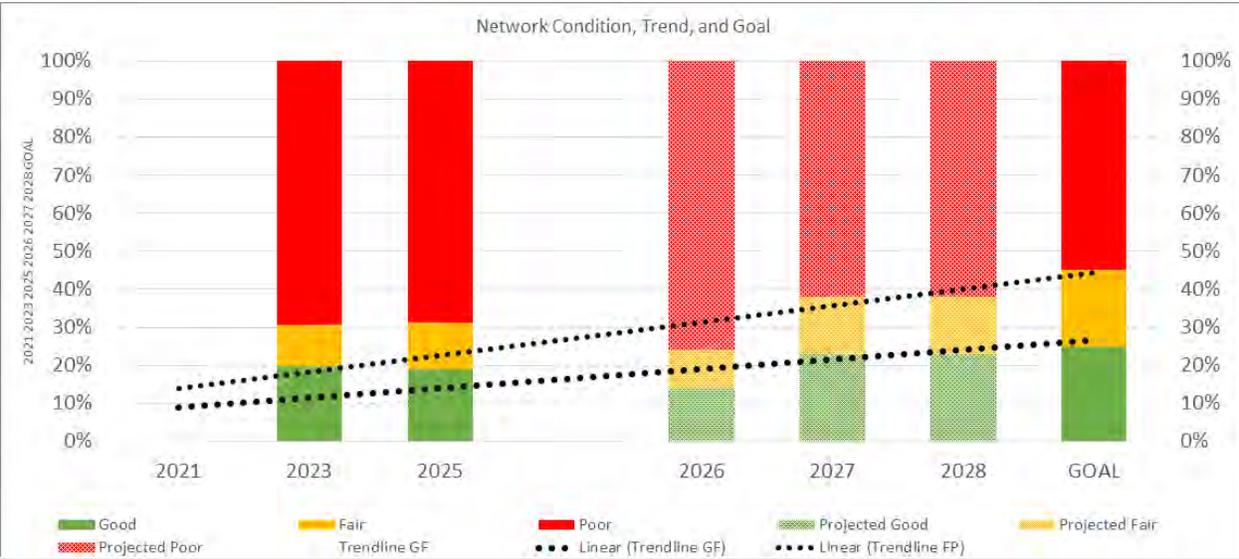

A summary of CCRC historical and current network conditions, projected trend and goal for the unpaved road network can be seen in the figure, below:

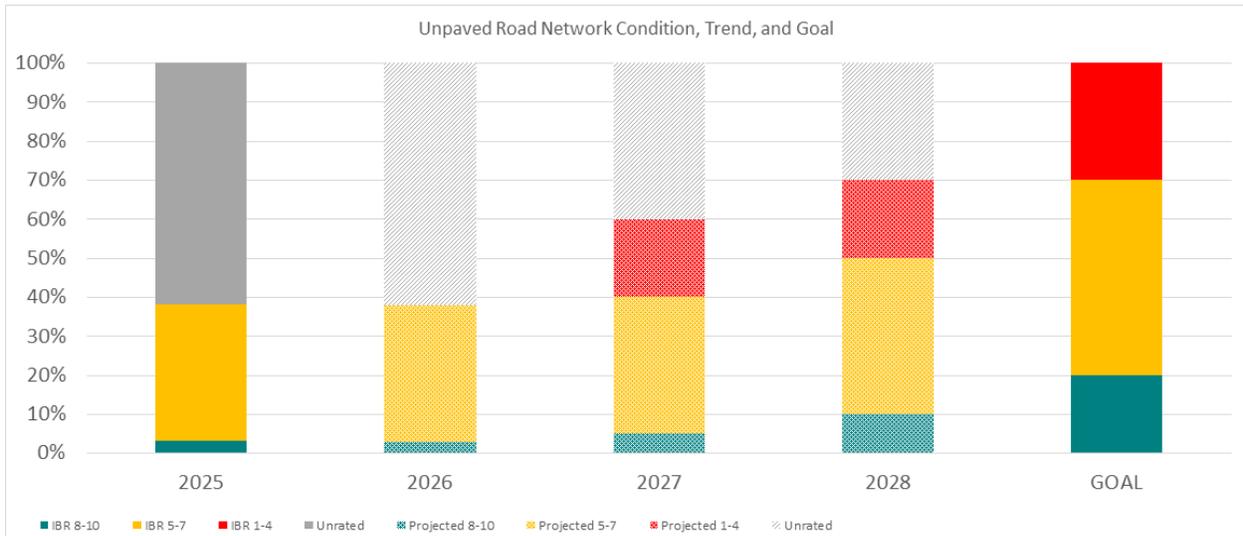

An asset management plan is required by Michigan Public Act 325 of 2018, and this document represents fulfillment of some of CCRC’s obligations towards meeting these requirements. This asset management plan also helps demonstrate CCRC’s responsible use of public funds by providing elected and appointed officials as well as the general public with inventory and condition information of CCRC’s road assets, and gives taxpayers the information they need to make informed decisions about investing in its essential transportation infrastructure.

# INTRODUCTION

Asset management is defined by Public Act 325 of 2018 as “an ongoing process of maintaining, preserving, upgrading, and operating physical assets cost effectively, based on a continuous physical inventory and condition assessment and investment to achieve established performance goals”. In other words, asset management is a process that uses data to manage and track assets, like roads and bridges, in a cost-effective manner using a combination of engineering and business principles. This process is endorsed by leaders in municipal planning and transportation infrastructure, including the Michigan Municipal League, County Road Association of Michigan, the Michigan Department of Transportation (MDOT), and the Federal Highway Administration (FHWA). CCRC is supported in its use of asset management principles and processes by the Michigan Transportation Asset Management Council (TAMC), formed by the State of Michigan.

Asset management, in the context of this plan, ensures that public funds are spent as effectively as possible to maximize the condition of the road network. Asset management also provides a transparent decision-making process that allows the public to understand the technical and financial challenges of managing road infrastructure with a limited budget.

The Crawford County Road Commission (CCRC) has adopted an “asset management” business process to overcome the challenges presented by having limited financial, staffing, and other resources while needing to meet road users’ expectations. CCRC is responsible for maintaining and operating over 714.106 centerline of roads.

This plan outlines how CCRC determines its strategy to maintain and upgrade road asset condition given agency goals, priorities of its road users, and resources provided. An updated plan is to be released approximately every three years to reflect changes in road conditions, finances, and priorities.

Questions regarding the use or content of this plan should be directed to Donald Babcock at 500 Huron St, Grayling, MI 49738 or at (989) 348-2281 and/or [dabcrawford1215@gmail.com](mailto:dabcrawford1215@gmail.com). [crawford-crc.com](http://crawford-crc.com)  
Key terms used in this plan are defined in CCRC’s comprehensive transportation asset management plan (also known as the “compliance plan”) used for compliance with PA 325 or 2018.

Knowing the basic features of the asset classes themselves is a crucial starting point to understanding the rationale behind an asset management approach. The following primer provides an introduction to pavements.

## **Pavement Primer**

Roads come in two basic forms—paved and unpaved. Paved roads have hard surfaces. These hard surfaces can be constructed from asphalt, concrete, composite (asphalt and concrete), sealcoat, and brick and block materials. On the other hand, unpaved roads have no hard surfaces. Examples of these surfaces are gravel and unimproved earth.

The decision to pave with a particular material as well as the decision to leave a road unpaved allows road-owning agencies to tailor a road to a particular purpose, environment, and budget. Thus, selecting a pavement type or leaving a road unpaved depends upon purpose, materials available, and budget. Each choice represents a trade-off between budget and costs for construction and maintenance.

Maintenance enables the road to fulfill its particular purpose. To achieve the maximum service for a pavement or an unpaved road, continual monitoring of a road's pavement condition is essential for choosing the right time to apply the right fix in the right place.

Here is a brief overview of the different types of pavements, how condition is assessed, and treatment options that can lengthen a road's service life.

### ***Surfacing***

Pavement type is influenced by several different factors, such as cost of construction, cost of maintenance, frequency of maintenance, and type of maintenance. These factors can have benefits affecting asset life and road user experience.

### ***Paved Surfacing***

Typical benefits and tradeoffs for hard surface types include:

- **Concrete pavement:** Concrete pavement, which is sometimes called a rigid pavement, is durable and lasts a long time when properly constructed and maintained. Concrete pavement can have longer service periods between maintenance activities, which can help reduce maintenance-related traffic disruptions. However, concrete pavements have a high initial cost and can be challenging to rehabilitate and maintain at the end of their service life. A typical concrete pavement design life will provide service for 30 years before major rehabilitation is necessary.
- **Hot-mix asphalt pavement (HMA):** HMA pavement, sometimes known as asphalt or flexible pavement, is currently less expensive to construct than concrete pavement (this is, in some part, due to the closer link between HMA material costs and oil prices that HMA pavements have in comparison with other pavement types). However, they require frequent maintenance activities to maximize their service life. A typical HMA pavement design life will provide service for 18 years before major rehabilitation is necessary. The vast majority of local-agency-owned pavements are HMA pavements.

- **Composite pavements:** Composite pavement is a combination of concrete and asphalt layers. Typically, composite pavements are old concrete pavements exhibiting ride-related issues that were overlaid by several inches of HMA in order to gain more service life from the pavement before it would need reconstruction. Converting a concrete pavement to a composite pavement is typically used as a “holding pattern” treatment to maintain the road in usable condition until reconstruction funds become available.
- **Sealcoat pavement:** Sealcoat pavement is a gravel road that have been sealed with a thin asphalt binder coating that has stone chips spread on top (not to be confused with a chip seal treatment over HMA pavement). This type of a pavement relies on the gravel layer to provide structure to support traffic, and the asphalt binder coating and stone chips shed water and eliminate the need for maintenance grading. Nonetheless, sealcoat pavement does require additional maintenance steps that asphalt and gravel do not require and does not last as long as HMA pavement, but it provides a low-cost alternative for lightly-trafficked areas and competes with asphalt for ride quality when properly constructed and maintained. Sealcoat pavement can provide service for ten or more years before the surface layer deteriorates and needs to be replaced.

### ***Unpaved Surfacing***

Typical benefits and tradeoffs for non-hard surfacing include:

- **Gravel:** Gravel is a low-cost, easy-to-maintain road surface made from layers of soil and aggregate (gravel). However, there are several potential drawbacks such as dust, mud, and ride smoothness when maintenance is delayed or traffic volume exceeds design expectations. Gravel roads require frequent low-cost maintenance activities. Gravel can be very cost effective for lower-volume, lower-speed roads. In the right conditions, a properly constructed and maintained gravel road can provide a service life comparable to an HMA pavement and can be significantly less expensive than the other pavement types.

### ***Pavement Condition***

Besides traffic congestion, pavement condition is what road users typically notice most about the quality of the roads that they regularly use—the better the pavement condition, the more satisfied users are with the service provided by the roadwork performed by road-owning agencies. Pavement condition is also a major factor in determining the most cost-effective treatment—that is, routine maintenance, capital preventive maintenance, or structural improvement—for a given section of pavement. As pavements age, they transition between “windows” of opportunity when a specific type of treatment can be applied to gain an increase in quality and extension of service life. Routine maintenance is day-to-day, regularly-scheduled, low-cost activity applied to “good” roads to prevent water or debris intrusion. Capital preventive maintenance (CPM) is a planned set of cost-effective treatments for “fair” roads that corrects pavement defects, slows further deterioration, and maintains the functional condition without increasing structural capacity. CCRC uses pavement condition and age to anticipate when a specific section of pavement will be a potential candidate for preventive maintenance. More detail on this topic is included in the *Pavement Treatment* section of this primer.

Pavement condition data is also important because it allows road owners to evaluate the benefits of preventive maintenance projects. This data helps road owners to identify the most cost-effective use of road construction and maintenance dollars. Further, historic pavement condition data can enable road owners to predict future road conditions based on budget constraints and to determine if a road network's condition will improve, stay the same, or degrade at the current or planned investment level. This analysis can help determine how much additional funding is necessary to meet a network's condition improvement goals.

### ***Paved Road Condition Rating System***

CCRC is committed to monitoring the condition of its road network and using pavement condition data to drive cost-effective decision-making and preservation of valuable road assets. CCRC uses the Pavement Surface Evaluation and Rating (PASER) system to assess its paved roads. PASER was developed by the University of Wisconsin Transportation Information Center to provide a simple, efficient, and consistent method for evaluating road condition through visual inspection. The widely-used PASER system has specific criteria for assessing asphalt, concrete, sealcoat, and brick and block pavements. Information regarding the PASER system and PASER manuals may be found on the TAMC website at:

[http://www.michigan.gov/tamc/0,7308,7-356-82158\\_82627---,00.html](http://www.michigan.gov/tamc/0,7308,7-356-82158_82627---,00.html).

The TAMC has adopted the PASER system for measuring statewide pavement conditions in Michigan for asphalt, concrete, composite, sealcoat, and brick-and-block paved roads. Broad use of the PASER system means that data collected at CCRC is consistent with data collected statewide. PASER data is collected using trained inspectors in a slow-moving vehicle using GPS-enabled data collection software provided to road-owning agencies at no cost to them. The method does not require extensive training or specialized equipment, and data can be collected rapidly, which minimizes the expense for collecting and maintaining this data.

The PASER system rates surface condition using a 1-10 scale where 10 is a brand new road with no defects that can be treated with routine maintenance, 5 is a road with distresses but is structurally sound that can be treated with preventive maintenance, and 1 is a road with extensive surface and structural distresses that is in need of total reconstruction.

Roads with lower PASER scores generally require costlier treatments to restore their quality than roads with higher PASER scores. The cost effectiveness of treatments generally decreases as the PASER number decreases. In other words, as a road deteriorates, it costs more dollars per mile to fix it, and the dollars spent are less efficient in increasing the road's service life. Nationwide experience and asset management principles tell us that a road that has deteriorated to a PASER 4 or less will cost more to improve and the dollars spent are less efficient. Understanding this cost principle helps to draw meaning from the current PASER condition assessment.

The TAMC has developed statewide definitions of road condition by creating three simplified condition categories—“good”, “fair”, and “poor”—that represent bin ranges of PASER scores having similar contexts with regard to maintenance and/or reconstruction. The definitions of these rating conditions are:

- “Good” roads, according to the TAMC, have PASER scores of 8, 9, or 10. Roads in this category have very few, if any, defects and only require minimal maintenance; they may be kept in this category longer using PPM. These roads may include those that have been recently seal coated or newly constructed. Figure 1 illustrates an example of a road in this category.
- “Fair” roads, according to the TAMC, have PASER scores of 5, 6, or 7. Roads in this category still show good structural support, but their surface is starting to deteriorate. Figure 1 illustrates two road examples in this category. CPM can be cost effective for maintaining the road’s “fair” condition or even raising it to “good” condition before the structural integrity of the pavement has been severely impacted. CPM treatments can be likened to shingles on a roof of a house: while the shingles add no structural value, they protect the house from structural damage by maintaining the protective function of a roof covering.
- “Poor” roads, according to the TAMC, have PASER scores of 1, 2, 3, or 4. These roads exhibit evidence that the underlying structure is failing, such as alligator cracking and rutting. These roads must be rehabilitated with treatments like a heavy overlay, crush and shape, or total reconstruction. Figure 1 illustrates a road in this category.

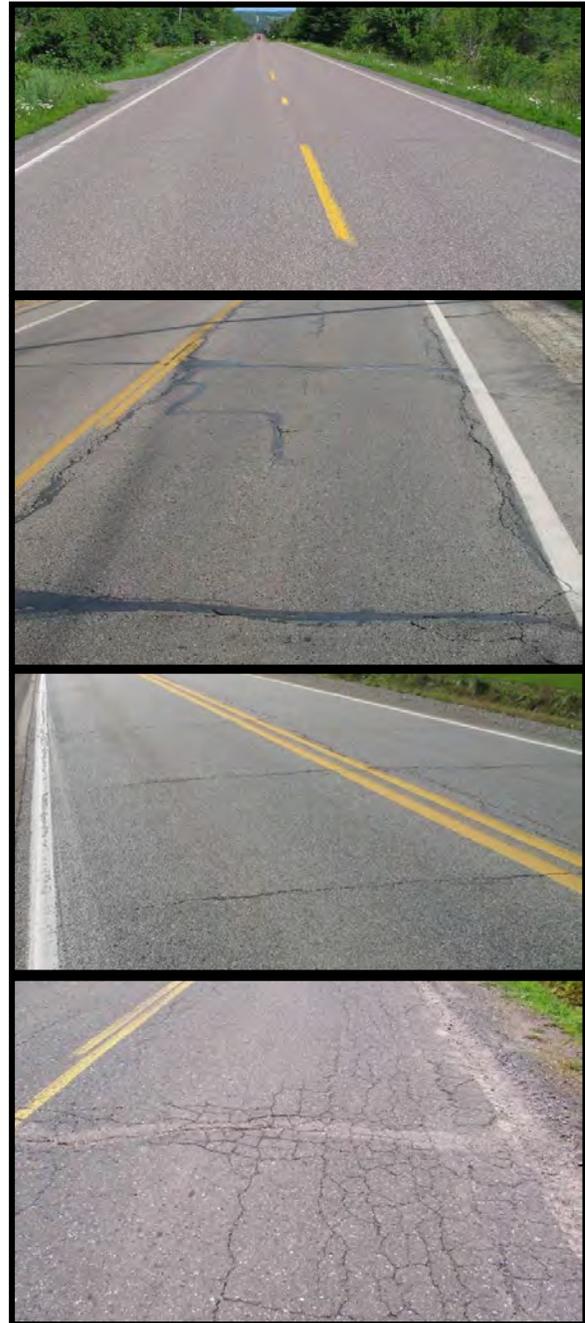


Figure 1: *Top image, right*– PASER 8 road that is considered “good” by the TAMC exhibit only minor defects. *Second image, right*– PASER 5 road that is considered “fair” by the TAMC. Exhibiting structural soundness but could benefit from CPM. *Third image, right*– PASER 6 road that is considered “fair” by the TAMC. *Bottom image, right*– PASER 2 road that is considered “poor” by the TAMC exhibiting significant structural distress.

The TAMC’s good, fair, and poor categories are based solely on the definitions, above. Therefore, caution should be exercised when comparing other condition assessments with these categories because other

condition assessments may have “good”, “fair”, or “poor” designations similar to the TAMC condition categories but may not share the same definition. Often, other condition assessment systems define the “good”, “fair”, and “poor” categories differently, thus rendering the data of little use for cross-system comparison. The TAMC’s definitions provide a statewide standard for all of Michigan’s road-owning agencies to use for comparison purposes.

PASER data is collected 100 percent every two years on all federal-aid-eligible roads in Michigan. The TAMC dictates and funds the required training and the format for this collection, and it shares the data regionally and statewide. The CCRC has not collected PASER data on its paved non-federal-aid-eligible network due to limited staffing.

### ***Unpaved Road Condition Rating System (IBR System™)***

The condition of unpaved roads can be rapidly changing, which makes it difficult to obtain a consistent surface condition rating over the course of weeks or even days. The PASER system works well on most paved roads, which have a relatively-stable surface condition over several months, but it is difficult to adapt to unpaved roads. To address the need for a reliable condition assessment system for unpaved roads, the TAMC adopted the Inventory Based Rating (IBR) System™, and CCRC also uses the IBR System™ for rating its unpaved roads. Information about the IBR System™ can be found at <http://ctt.mtu.edu/inventory-based-rating-system>.

The IBR System™ gathers reliable condition assessment data for unpaved road by evaluating three features—surface width, drainage adequacy, and structural adequacy—in comparison to a baseline, or generally considered “good”, road. These three assessments come together to generate an overall 1-10 IBR number. A high IBR number reflects a road with wide surface width, good drainage, and a well-designed and well-constructed base, whereas a low IBR number reflects a narrow road with no ditches and little gravel. A good, fair, or poor assessment of each feature is not an endorsement or indictment of a road’s suitability for use but simply provides context on how these road elements compare to a baseline condition.

Figure 2 illustrates the range over which features may be assessed. The top example in Figure 2 shows an unpaved road with a narrow surface width, little or no drainage, and very little gravel thickness. Using the IBR System™, these assessments would yield an IBR number of “1” for this road.

The middle example in Figure 2 shows a road with fair surface width, fair drainage adequacy, and fair



Figure 2: *Top*—Road with IBR number of 1 road that has poor surface width, poor drainage adequacy, and poor structural adequacy. *Middle*— Road IBR number of 7 that has fair surface width, fair drainage adequacy, and fair structural adequacy. *Bottom*—Road with IBR number of 9 road that has good surface width, good drainage adequacy, and good structural adequacy.

structural adequacy. These assessments would yield an IBR number of “7” for this road. The bottom example in Figure 2 shows a road with good surface width, good drainage adequacy, and good structural adequacy. These assessments would yield an IBR number of “9” for this road.

Unpaved roads are constructed and used differently throughout Michigan. A narrow, unpaved road with no ditches and very little gravel (low IBR number) may be perfectly acceptable in a short, terminal end of the road network, for example, on a road segment that ends at a lake or serves a limited number of unoccupied private properties. However, high-volume unpaved roads that serve agricultural or other industrial activities with heavy trucks and equipment will require wide surface width, good drainage, and a well-designed and well-constructed base structure (high IBR number). Where the unpaved road is and how it is used determines how the road must be constructed and maintained: just because a road has a low IBR number does not necessarily mean that it needs to be upgraded. The IBR number are not an endorsement or indictment of the road’s suitability for use but rather, an indication of a road’s capabilities to support different traffic volumes and types in all weather.

### ***Pavement Treatments***

Selection of repair treatments for roads aims to balance costs, benefits, and road life expectancy. All pavements are damaged by water, traffic weight, freeze/thaw cycles, and sunlight. Each of the following treatments and strategies—reconstruction, structural improvements, capital preventive maintenance, and others used by CCRC—counters at least one of these pavement-damaging forces.

### ***Reconstruction***

Pavement reconstruction treats failing or failed pavements by completely removing the old pavement and base and constructing an entirely new road (Figure 3). Every pavement has to eventually be reconstructed and it is usually done as a last resort after more cost-effective treatments are done, or if the road requires significant changes to road geometry, base, or buried utilities. Compared to the other treatments, which are all improvements of the existing road, reconstruction is the most extensive rehabilitation of the roadway and therefore, also the most expensive per mile and most disruptive to regular traffic patterns. Reconstructed pavement will subsequently require one or more of the previous maintenance treatments to maximize service life and performance. A reconstructed road lasts approximately 15 years and costs



Figure 3: Examples of reconstruction treatments—(left) reconstructing a road and (right) road prepared for full-depth repair.

\$250,000 per lane mile. The following descriptions outline the main reconstruction treatments used by CCRC.

### *Ditching (for Unpaved Roads)*

Water needs to drain away from any roadway to delay softening of the pavement structure, and proper drainage is critical for unpaved roads where there is no hard surface on top to stop water infiltration into the road surface and base. To improve drainage, new ditches are dug or old ones are cleaned out. Unpaved roads typically need to be re-ditched every 15 years at a cost of \$10,000 per mile.

### *Gravel Overlay (for Unpaved Roads)*

Unpaved roads will exhibit gravel loss over time due to traffic, wind, and rain. Gravel on an unpaved road provides a wear surface and contributes to the structure of the entire road. Unpaved roads typically need to be overlaid with four inches of new gravel every 15 years at a cost of \$25,000 per mile.

## ***Structural Improvement***

Roads requiring structural improvements exhibit alligator cracking and rutting and rated poor in the TAMC scale. Road rutting is evidence that the underlying structure is beginning to fail and it must be either rehabilitated with a structural treatment. Examples of structural improvement treatments include HMA overlay with or without milling, and crush and shape (Figure 4). The following descriptions outline the main structural improvement treatments used by CCRC.

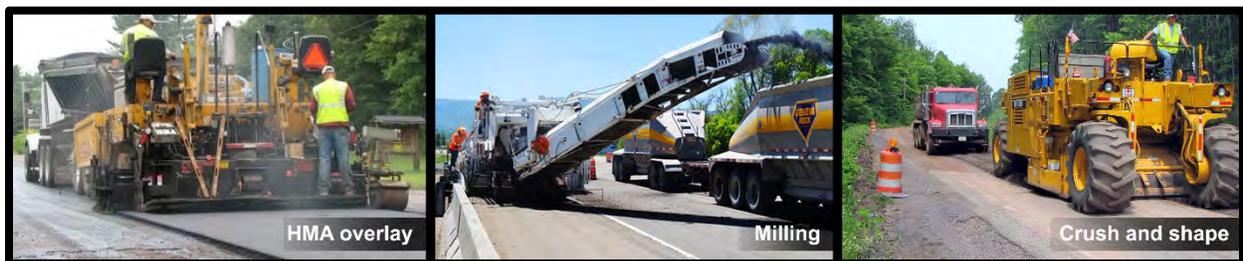


Figure 4: Examples of structural improvement treatments—(from left) HMA overlay on an unmilled pavement, milling asphalt pavement, and pulverization of a road during a crush-and-shape project.

### ***Hot-mix Asphalt (HMA) Overlay with/without Milling***

An HMA overlay is a layer of new asphalt (liquid asphalt and stones) placed on an existing pavement (Figure 4). Depending on the overlay thickness, this treatment can add significant structural strength. This treatment also creates a new wearing surface for traffic and seals the pavement from water, debris, and sunlight damage. An HMA overlay lasts approximately five to ten years and costs \$50,000 to \$100,000 per lane mile. The top layer of severely damaged pavement can be removed by the milling, a technique that helps prevent structural problems from being quickly reflected up to the new surface. Milling is also done to keep roads at the same height of curb and gutter that is not being raised or reinstalled in the project. Milling adds \$10,000 per lane mile to the HMA overlay cost.

### *Crush and Shape*

During a crush and shape treatment, the existing pavement and base are pulverized and then the road surface is reshaped to correct imperfections in the road's profile (Figure 4). An additional layer of gravel is often added along with a new wearing surface such as an HMA overlay or chip seal. Additional gravel and an HMA overlay give an increase in the pavements structural capacity. This treatment is usually done on rural roads with severe structural distress; Adding gravel and a wearing surface makes it more prohibitive for urban roads if the curb and gutter is not raised up. Crush and shape treatments last approximately 14 years and cost \$150,000 per lane mile.

### *Capital Preventive Maintenance*

Capital preventive maintenance (CPM) addresses pavement problems of fair-rated roads before the structural integrity of the pavement has been severely impacted. CPM is a planned set of cost-effective treatments applied to an existing roadway that slows further deterioration and that maintains or improves the functional condition of the system without significantly increasing the structural capacity. Examples of such treatments include crack seal, fog seal, chip seal, slurry seal, and microsurface (Figure 5). The purpose of the following CPM treatments is to protect the pavement structure, slow the rate of deterioration, and/or correct pavement surface deficiencies. The following descriptions outline the main CPM treatments used by CCRC.



Figure 5: Examples of capital preventive maintenance treatments—(from left) crack seal, fog seal, chip seal, and slurry seal/microsurface.

### *Crack Seal*

Water that infiltrates the pavement surface softens the pavement structure and allows traffic loads to cause more damage to the pavement than in normal dry conditions. Crack sealing helps prevent water infiltration by sealing cracks in the pavement with asphalt sealant (Figure 5). CCRC seals pavement cracks early in the life of the pavement to keep it functioning as strong as it can and for as long as it can. Crack sealing lasts approximately two years and costs \$4,000 per lane mile. Even though it does not last very long compared to other treatments, it does not cost very much compared to other treatments. This makes it a very cost effective treatment when CCRC looks at what crack filling costs per year of the treatment's life.

### *Fog Seal*

Fog sealing sprays a liquid asphalt coating onto the entire pavement surface to fill hairline cracks and prevent damage from sunlight (Figure 5). Fog seals are best for good to very good pavements and last approximately two years at a cost of \$1,000 per lane mile.

### *Chip Seal*

A chip seal, also known as a sealcoat, is a two-part treatment that starts with liquid asphalt sprayed onto the old pavement surface followed by a single layer of small stone chips spread onto the wet liquid asphalt layer (Figure 5). The liquid asphalt seals the pavement from water and debris and holds the stone chips in place, providing a new wearing surface for traffic that can correct friction problems and helping to prevent further surface deterioration. Chip seals are best applied to pavements that are not exhibiting problems with strength, and their purpose is to help preserve that strength. These treatments last approximately five years and cost \$12,000 per lane mile.

### *Maintenance Grading (for Unpaved Roads)*

Maintenance grading involves regrading an unpaved road to remove isolated potholes, washboarding, and ruts then restoring the compacted crust layer (Figure 6). Crust on an unpaved road is a very tightly compacted surface that sheds water with ease but takes time to be created, so destroying a crusted surface with maintenance grading requires a plan to restore the crust. Maintenance grading often needs to be performed three to five times per year and each grading costs \$300 per mile.

### *Dust Control (for Unpaved Roads)*

Dust control typically involves spraying chloride or other chemicals on a gravel surface to reduce dust loss, aggregate loss, and maintenance (Figure 6). This is a relatively short-term fix that helps create a crusted surface. Chlorides work by attracting moisture from the air and existing gravel. This fix is not effective if the surface is too dry or heavy rain is imminent, so timing is very important. Dust control is done two to four times per year and each application costs \$700 per mile.



Figure 6: Examples of capital preventive maintenance treatments, cont'd—(from left) concrete road prepared for partial-depth repair, gravel road undergoing maintenance grading, and gravel road receiving dust control application (dust control photo courtesy of Weld County, Colorado, weldgov.com).

### ***Maintenance***

Maintenance is the most cost-effective strategy for managing road infrastructure and prevents good and fair roads from reaching the poor category, which require costly rehabilitation and reconstruction treatments to create a year of service life. It is most effective to spend money on routine maintenance and CPM treatments, first; then, when all maintenance project candidates are treated, reconstruction and rehabilitation can be performed as money is available. This strategy is called a “mix-of-fixes” approach to managing pavements.

# 1. PAVEMENT ASSETS

Building a mile of new road can cost over \$1 million due to the large volume of materials and equipment that are necessary. The high cost of constructing road assets underlines the critical nature of properly managing and maintaining the investments made in this vital infrastructure. The specific needs of every mile of road within an agency's overall road network is a complex assessment, especially when considering rapidly changing conditions and the varying requisites of road users; understanding each road-mile's needs is an essential duty of the road-owning agency.

In Michigan, many different governmental units (or agencies) own and maintain roads, so it can be difficult for the public to understand who is responsible for items such as planning and funding construction projects, [patching] repairs, traffic control, safety, and winter maintenance for any given road. MDOT is responsible for state trunkline roads, which are typically named with "M", "I", or "US" designations regardless of their geographic location in Michigan. Cities and villages are typically responsible for all public roads within their geographic boundary with the exception of the previously mentioned state trunkline roads managed by MDOT. County road commissions (or departments) are typically responsible for all public roads within the county's geographic boundary, with the exception of those managed by cities, villages, and MDOT.

In cases where non-trunkline roads fall along jurisdictional borders, local and intergovernmental agreements dictate ownership and maintenance responsibility. Quite frequently, roads owned by one agency may be maintained by another agency because of geographic features that make it more cost effective for a neighboring agency to maintain the road instead of the actual road owner. Other times, road-owning agencies may mutually agree to coordinate maintenance activities in order to create economies of scale and take advantage of those efficiencies.

The CCRC is responsible for a total of 714.106 centerline of public roads, as shown in Figure 7.

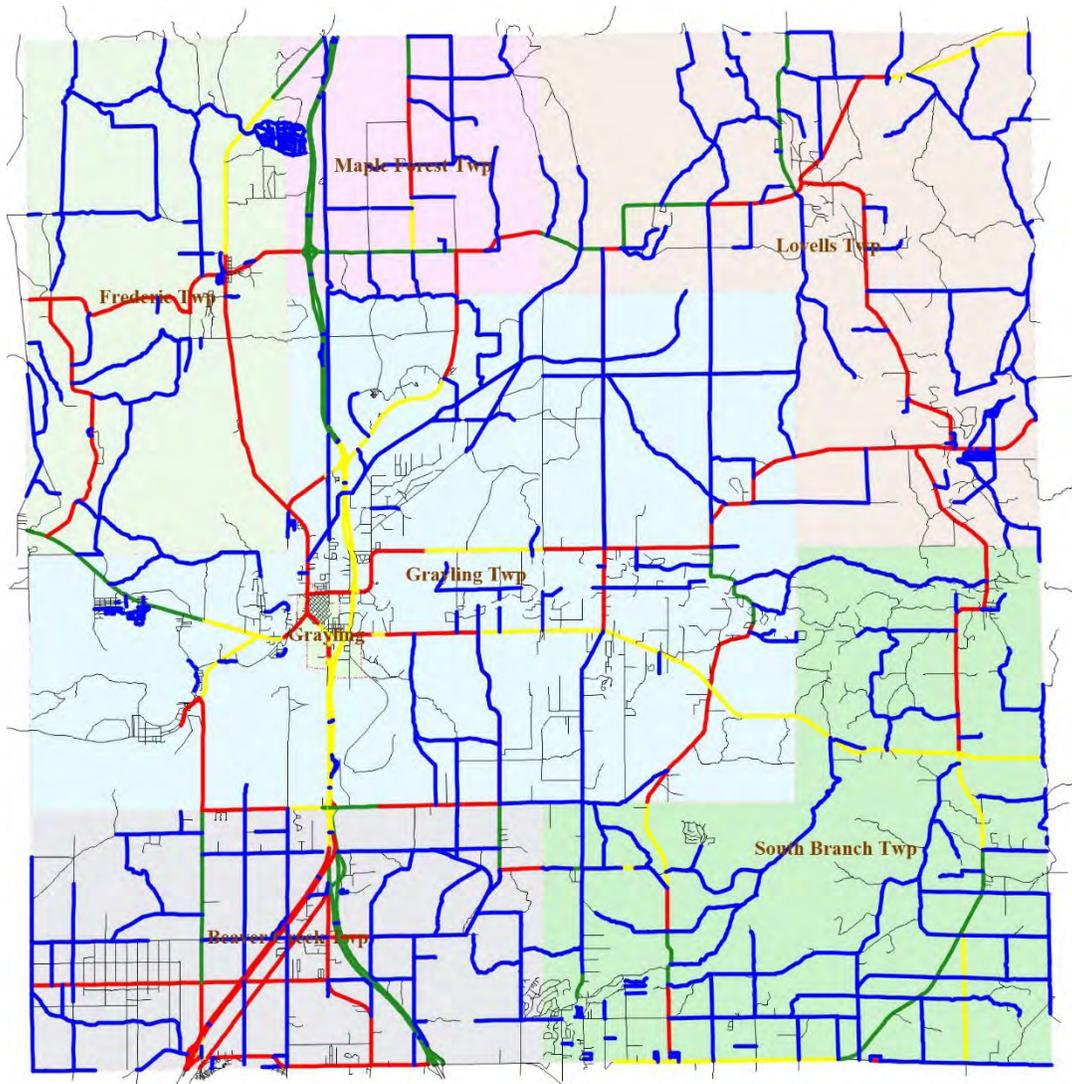


Figure 7: Map showing location of CCRC's paved roads (i.e., those managed by CCRC) and their current condition for paved roads with green for good (i.e., PASER 10, 9, 8), yellow for fair (i.e., PASER 7, 6, 5), and red for poor (i.e., PASER 4, 3, 2, 1), as well as the location of CCRC's unpaved roads in blue

## Inventory

Michigan Public Act 51 of 1951 (PA 51), which defines how funds from the Michigan Transportation Fund (MTF) are distributed to and spent by road-owning agencies, classifies roads owned by CCRC as either county primary or county local roads. State statute prioritizes expenditures on the county primary road network.

Of the 714,106 centerline of public roads owned and/or managed by CCRC, approximately 82% of all County Primary roads are classified as federal aid eligible, which allows them to receive federal funding for their maintenance and construction. Only 1% of County Local roads are considered federal aid eligible, which means state and local funds must be used to manage these roads.

Figure 8 illustrates the percentage of roads owned by CCRC that are classified as county primary and county local roads. Figure 9 illustrates this breakdown of these road networks by township boundary within CCRC’s jurisdiction.

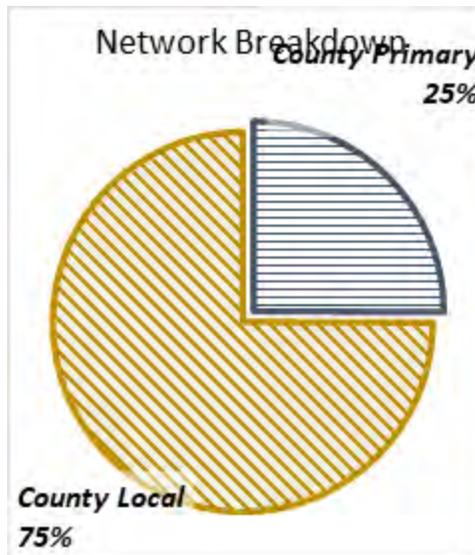


Figure 8: Percentage of county primary and county local roads for CCRC.

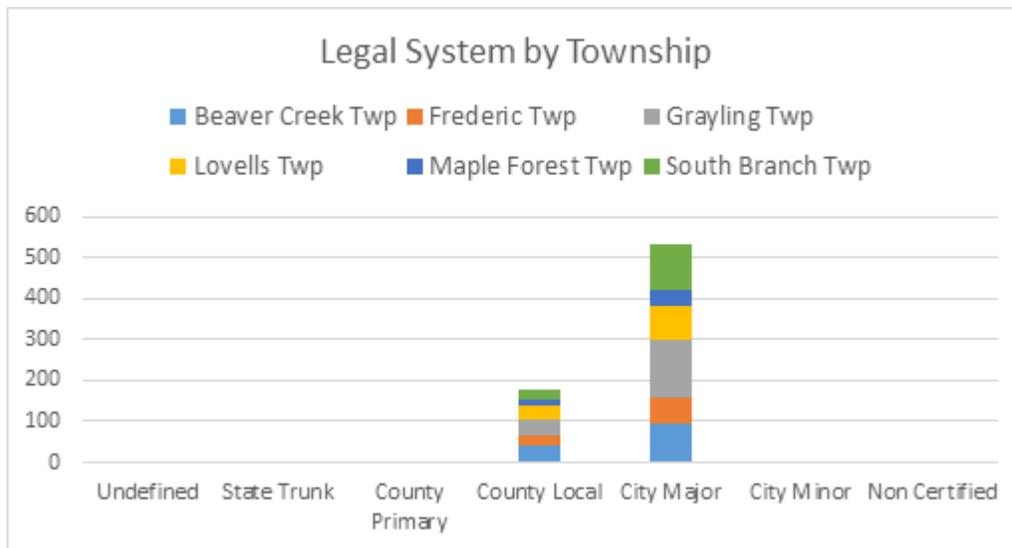


Figure 9: county primary and county local roads by township for CCRC's jurisdiction.

CCRC manages 5.728 miles of roads that are part of the National Highway System (NHS)—in other words, those roads that are critical to the nation’s economy, defense, and mobility—and monitors and maintains their condition. The NHS is subject to special rules and regulations and has its own performance metrics dictated by the FHWA. While most NHS roads in Michigan are managed by MDOT, CCRC manages a percentage of those roads located in its jurisdiction, as shown in Figure 10.

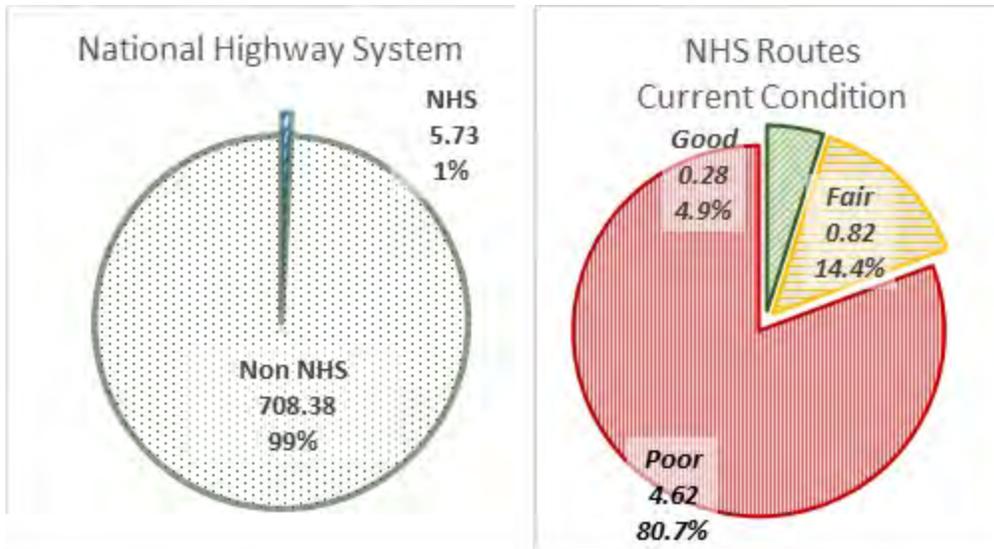


Figure 10: Miles of roads managed by CCRC that are part of the National Highway System and condition.

CCRC also owns and manages 474.816 miles of unpaved roads.

### Types

CCRC has multiple types of pavements in its jurisdiction, including: asphalt, concrete, and undefined; it also has unpaved roads (i.e., gravel and/or earth). Factors influencing pavement type include cost of construction, cost of maintenance, frequency of maintenance, type of maintenance, asset life, and road user experience. More information on pavement types is available in the Introduction's Pavement Primer.

Figure 11 illustrates the percentage of various pavement types that CCRC has in its network. Figure 12 shows the pavement type by Township boundary for CCRC's jurisdiction.

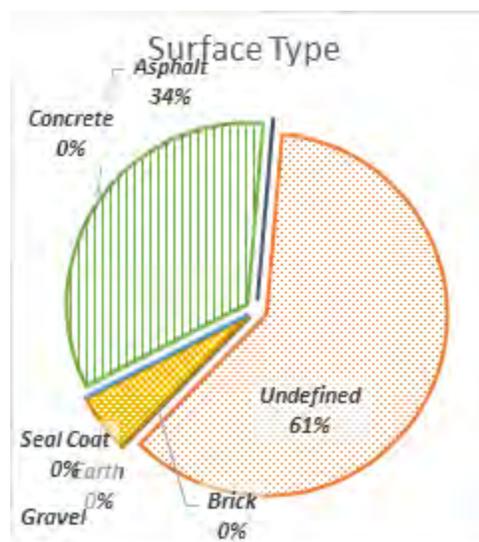


Figure 11: Pavement type by percentage maintained by CCRC Undefined pavements have not been inventoried in CCRC's asset management system to date, but will be included as data becomes available.

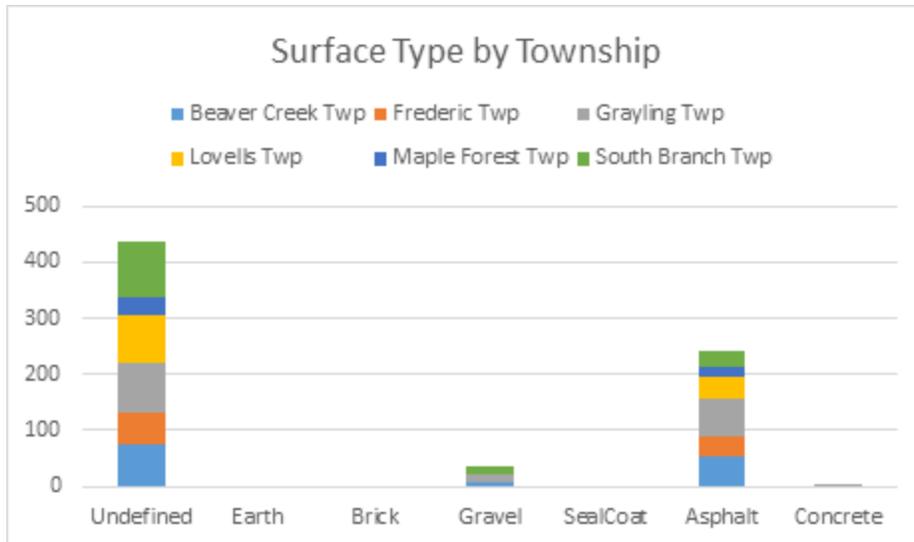


Figure 12: Pavement type by township within CCRC’s jurisdiction. Undefined pavements have not been inventoried in CCRC’s asset management system to date, but will be included as data becomes available.

### **Locations**

Locations and sizes of each asset can be found in CCRC’s Roadsoft database. For more detail, please refer to the agency contact listed in the *Introduction* of this pavement asset management plan.

### **Condition**

The road characteristic that road users most readily notice is pavement condition. Pavement condition is a major factor in determining the most cost-effective treatment—that is, routine maintenance, capital preventive maintenance, or structural improvement—for a given section of pavement. CCRC uses pavement condition and age to anticipate when a specific section of pavement will be a potential candidate for preventive maintenance. Pavement condition data enables CCRC to evaluate the benefits of preventive maintenance projects and to identify the most cost-effective use of road construction and maintenance dollars. Historic pavement condition data can be used to predict future road conditions based on budget constraints and to determine if a road network’s condition will improve, stay the same, or degrade at the current or planned investment level. This analysis helps to determine how much additional funding is necessary to meet a network’s condition improvement goals. More detail on this topic is included in the Introduction’s *Pavement Primer*.

### **Paved Roads**

CCRC is committed to monitoring the condition of its road network and using pavement condition data to drive cost-effective decision-making and preservation of valuable road assets. CCRC uses the Pavement Surface Evaluation and Rating (PASER) system, which has been adopted by the TAMC for measuring statewide pavement conditions, to assess its paved roads. The PASER system provides a simple, efficient, and consistent method for evaluating road condition through visual inspection. More information regarding the PASER system can be found in the Introduction’s *Pavement Primer*.

CCRC collects 100 percent of its PASER data every two years on all federal-aid-eligible roads in Michigan. The CCRC has not collected PASER data on its paved non-federal-aid-eligible network due to limited staffing.

CCRC's 2025 paved county primary road network has 18 percent of roads in the TAMC good condition category, 12 percent in fair, and 70 percent in poor (Figure 13).

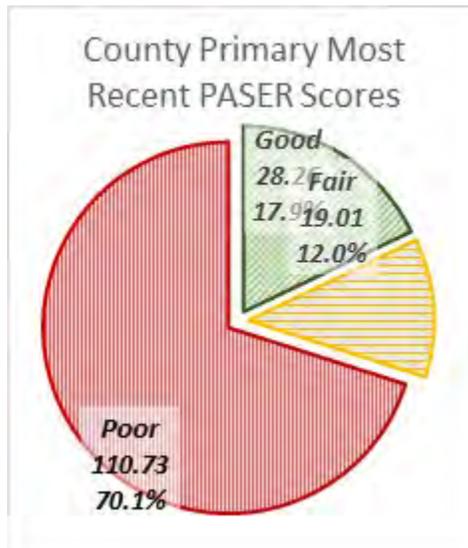


Figure 13: CCRC paved county primary road network conditions by percentage of good, fair, or poor.

In comparison, the statewide paved county primary road network has 28 percent of roads in the TAMC good condition category, 40 percent in fair, and 32 percent in poor (Figure 14). Comparing Figure 13 and Figure 14 shows that CCRC's paved county primary road network is worse than similarly-classified roads in the rest of the state. Other road condition graphs can be viewed on the TAMC pavement condition dashboard at: <http://www.mcgi.state.mi.us/mitrp/Data/PaserDashboard.aspx>.

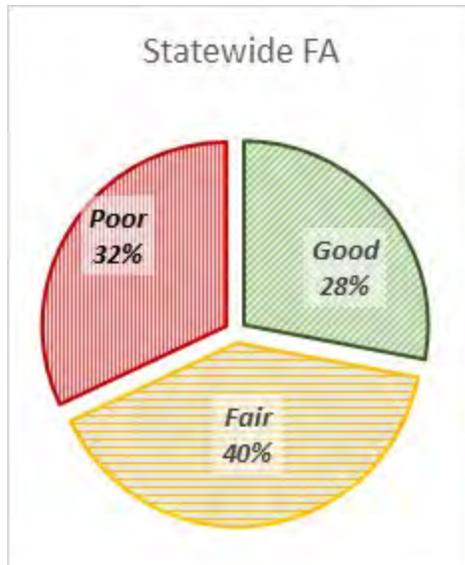


Figure 14: Statewide paved county primary road network conditions by percentage of good, fair, or poor

Historically, the CCRC PASER conditions have been improving, but at a much slower pace than the rest of the state. This is most likely due to several large scale commercial and industrial developments over the past decade along with a multi-county landfill. These developments have necessitated more extensive road improvement projects to support projected traffic demands. The larger projects have not allowed the CCRC to perform as many miles of less expensive CPM projects meant to improve and maintain road conditions. Crawford County sits at the center of the northern Michigan logging industry as well with several large wood processing plants that create a larger percentage of heavy truck traffic. In addition, Camp Grayling and its numerous ranges and facilities are in Crawford County. The camp also creates a larger amount of heavy truck traffic.

Figure 15 shows the number of miles for CCRC's roads with PASER scores expressed in TAMC definition categories for the paved county primary road network. CCRC considers road miles on the transition line between good and fair (PASER 8) and the transition line between fair and poor (PASER 5) as representing parts of the road network where there is a risk of losing the opportunity to apply less expensive treatments that gain significant improvements in service life.

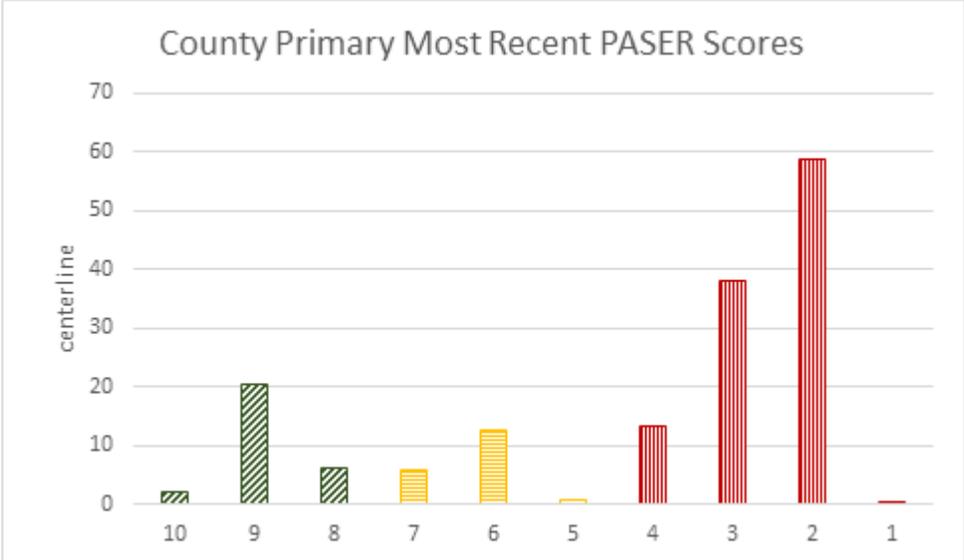


Figure 15: CCRC paved county primary road network conditions. Bar graph colors correspond to good/fair/poor TAMC designations.

Figure 17 illustrates CCRC’s entire paved road network divided by township into the TAMC good/fair/poor designations.

Figure 18 provides a map illustrating the geographic location of paved roads and their respective PASER condition. An online version of the most recent PASER data is located at <https://www.mcgi.state.mi.us/tamcMap/>.

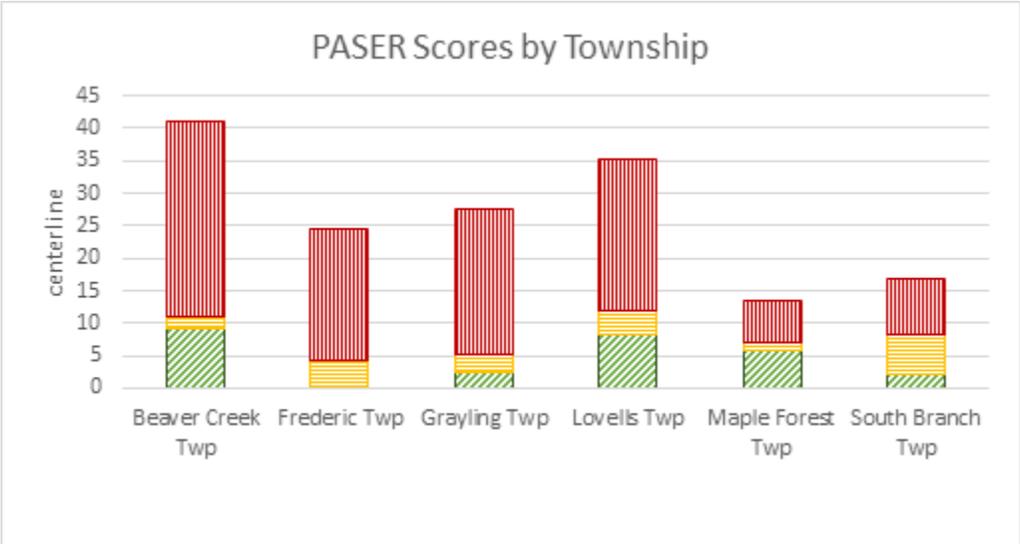


Figure 17: Number of miles of paved road in each township divided in categories of good (PASER 10, 9, 8), fair (PASER 7, 6, 5), and poor (PASER 4, 3, 2, 1).

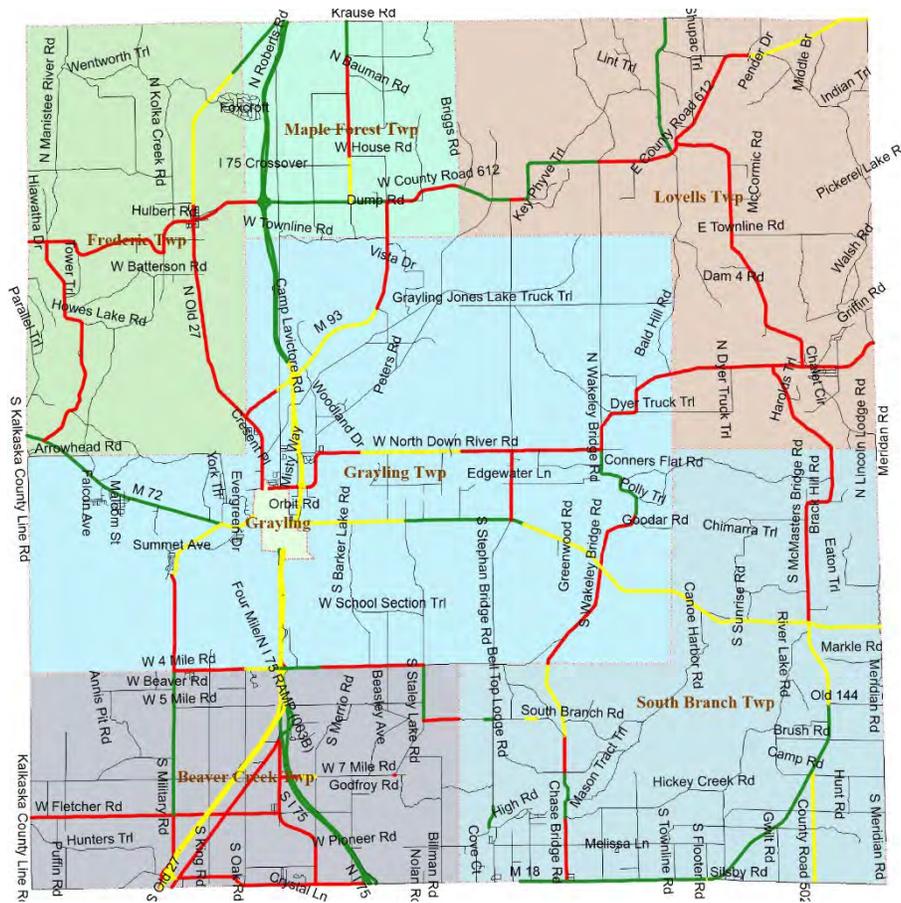


Figure 18: Map of the current paved road condition in good (PASER 10, 9, 8) shown in green, fair (PASER 7, 6, 5) shown in yellow, and poor (PASER 4, 3, 2, 1) shown in red. Only Roads owned by CCRC are shown.

The overall trend for Crawford County PASER conditions on the paved primary road network has been slowly increasing good roads, and stable fair and poor rated roads. Many of the good and fair roads are those that serve the commercial and industrial developments noted earlier. Upcoming planned primary road projects are meant to close the gaps on these important routes.

Historically, the overall quality of CCRC’s paved county primary roads have been increasing, as can be observed in Figure 19, although at a slow pace. This slower pace is due to several factors. One factor is the funding for improvement projects that was required for new commercial and industrial development as noted earlier. Another factor is decreases in MTF funding brought on by reductions in vehicle travel during the COVID pandemic in 2020 and 2021, and more fuel-efficient vehicles resulting in less revenue collected. The sharp increase in costs due to inflation and supply chain issues from the COVID pandemic had a large impact as well.

Comparing CCRC’s paved county primary road condition trends illustrated in Figure 19 with overall statewide condition trends for similarly-classified roads, which are illustrated in Figure 20, shows a similar trend locally as in the rest of the state.

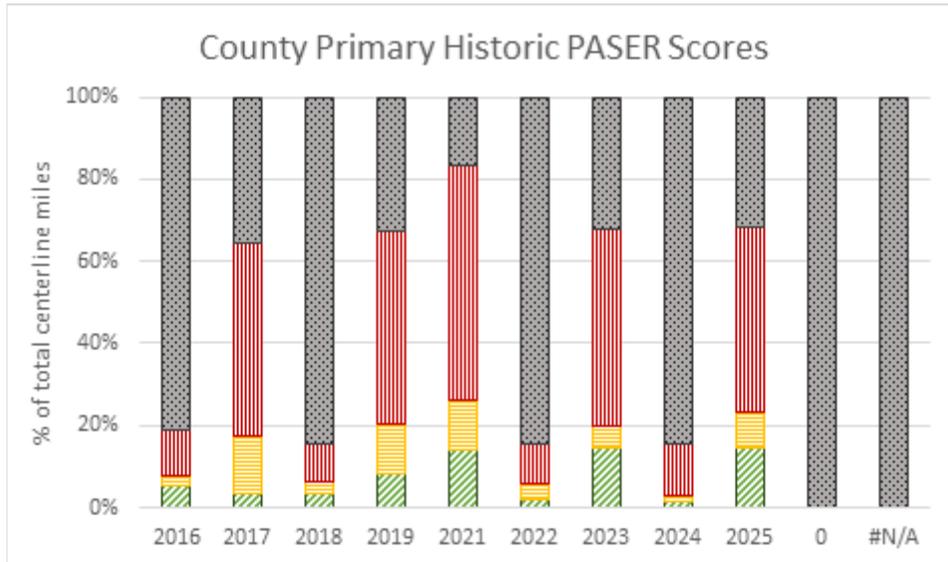


Figure 19: Historical CCRC paved county primary road network condition trend

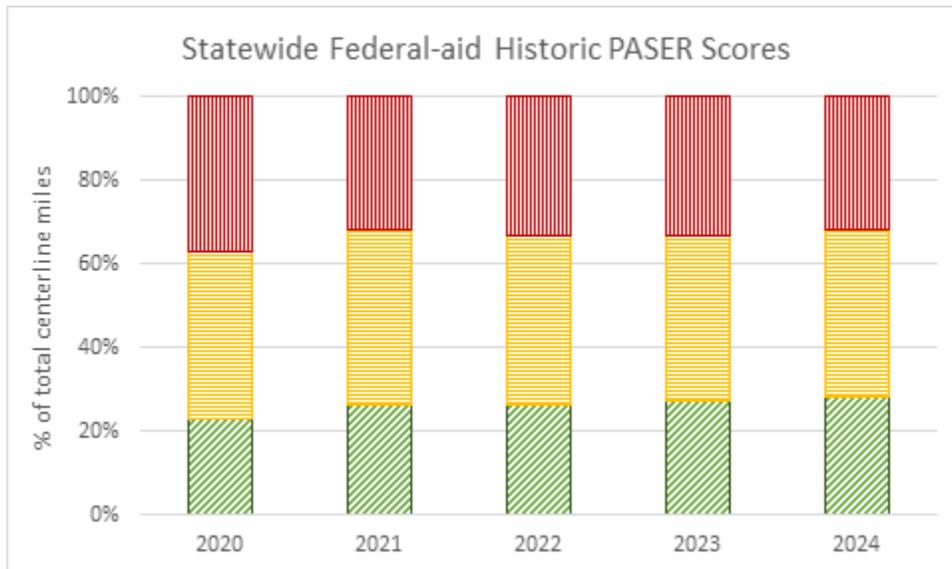


Figure 20: Historical statewide county primary road network condition trend

The CCRC has not rated paved county local roads so comparing rating history or trends is not possible at this time. The CCRC plans to complete entering surface types and conduct ratings on the local system over the next several years.

### ***Unpaved Roads***

The condition of unpaved roads can be rapidly changing, which makes it difficult to obtain a consistent surface condition rating over the course of weeks or even days. The TAMC adopted the Inventory Based Rating (IBR) System™ for rating unpaved roads, and CCRC uses the IBR System™ for rating its unpaved roads. More information regarding the IBR System™ can be found in Introduction’s Pavement Primer.

The unpaved roads under CCRC’s jurisdiction generally serve as access to the vast forested natural resource areas for recreational use by the public. Population changes, development, and connectivity serve as the main catalyst for determining which unpaved roads would best be served by upgrading to a hard surface. Increased traffic volume due to population increases and development causes an increased need for maintenance and costs. Hard surfacing of the road can reduce the need for increased maintenance.

Figure 21 shows the percentage of unpaved roads in each IBR number ranges of 10, 9, and 8; 7, 6, and 5; and 4, 3, 2, and 1, for county primary roads. The CCRC has not rated the unpaved county local system at this time. Figure 22 illustrates the miles of unpaved roads in IBR number ranges of 10, 9, and 8; 7, 6, and 5; and 4, 3, 2, and 1, for each township.



Figure 21: CCRC’s unpaved road network condition by percentage of roads with IBR numbers of 10, 9, and 8; roads with IBR numbers of 7, 6, and 5; and IBR numbers of 4, 3, 2, and 1.

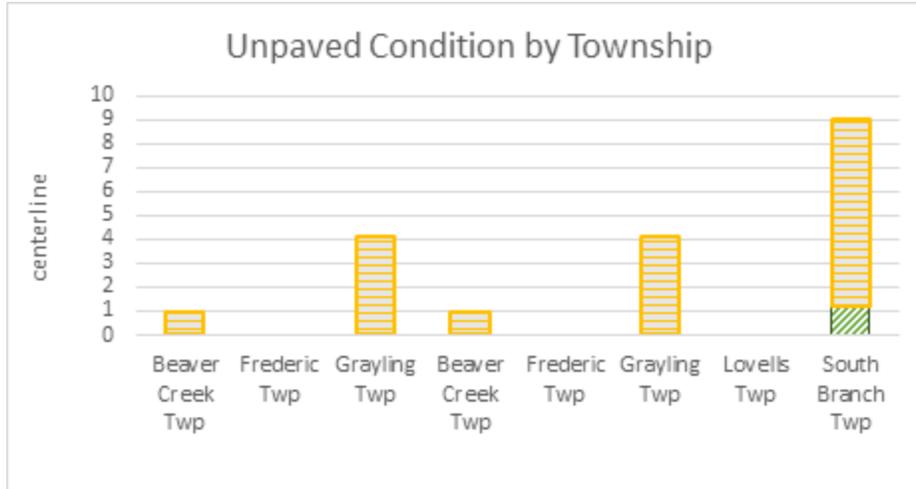
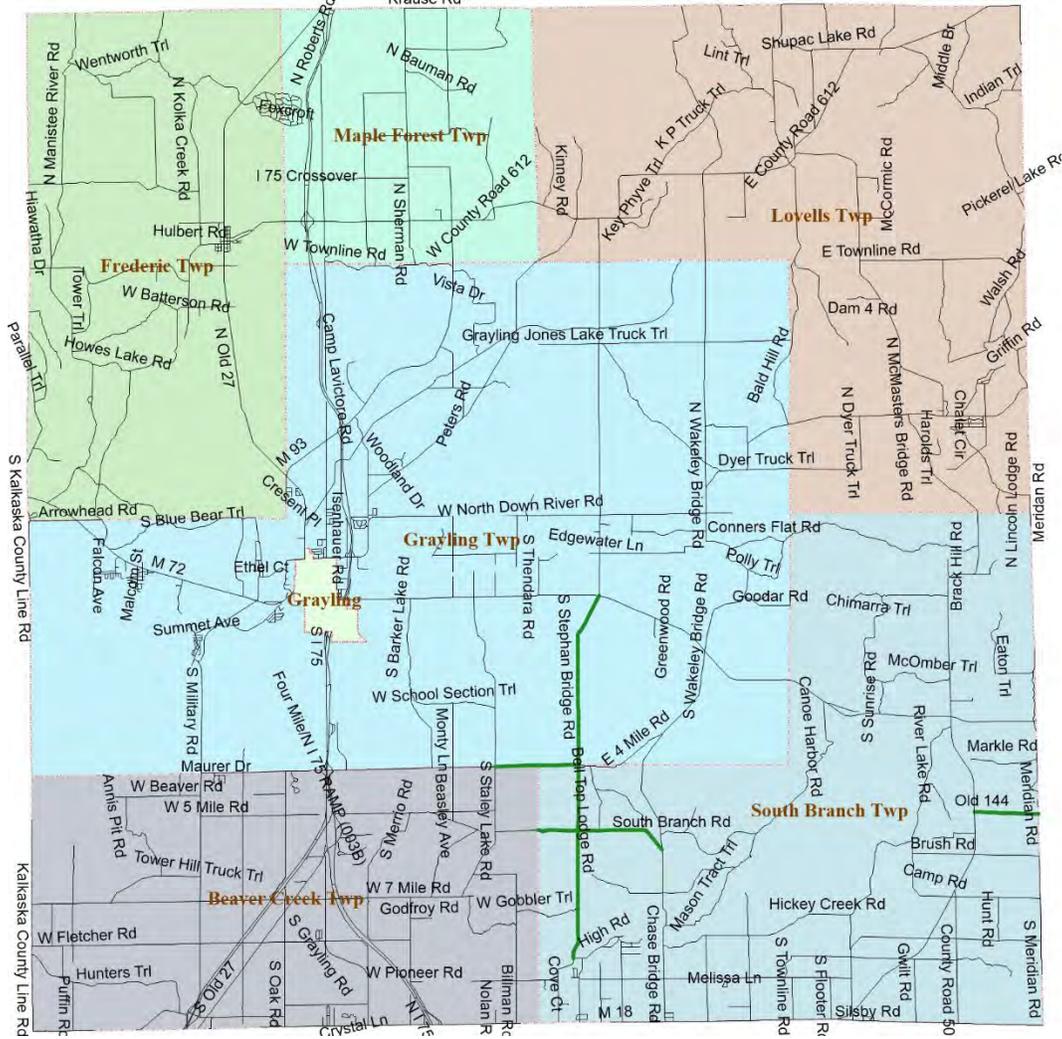


Figure 22: Number of miles of unpaved road in each township divided in categories of roads with IBR numbers of 10, 9, and 8; IBR numbers of 7, 6, and 5; and IBR numbers of 4, 3, 2, and 1.

Figure 23, Figure 24, and Figure 25 are maps illustrating the geographic location of unpaved roads and the assessment of the IBR elements, respectively: surface width, drainage adequacy, and structural adequacy.



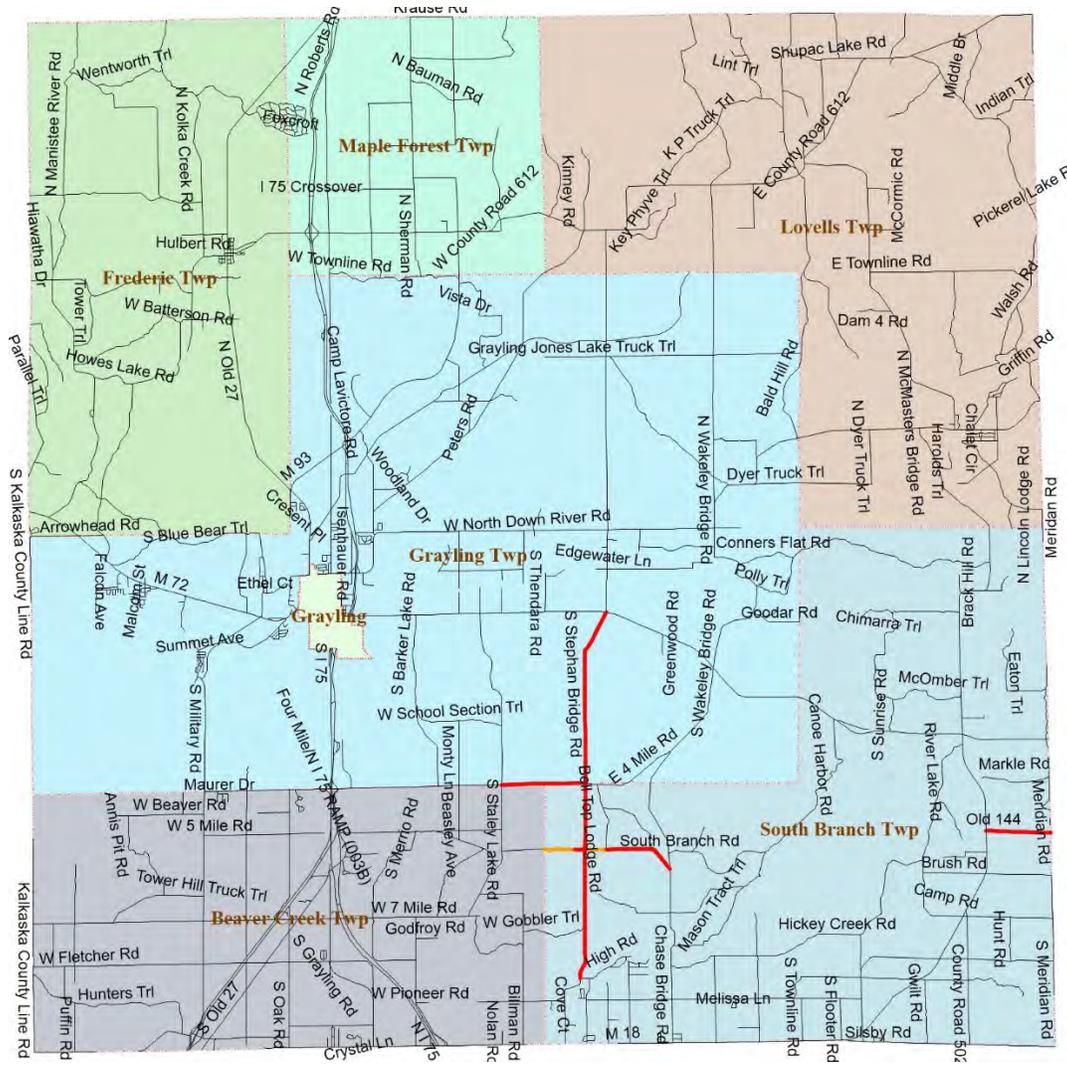


Figure 24: Map of the current IBR for drainage adequacy with good (2' or more) shown in green, fair (0.5' to less than 2') shown in orange, and poor (less than 0.5') shown in red. Only unpaved roads owned by CCRC are shown.

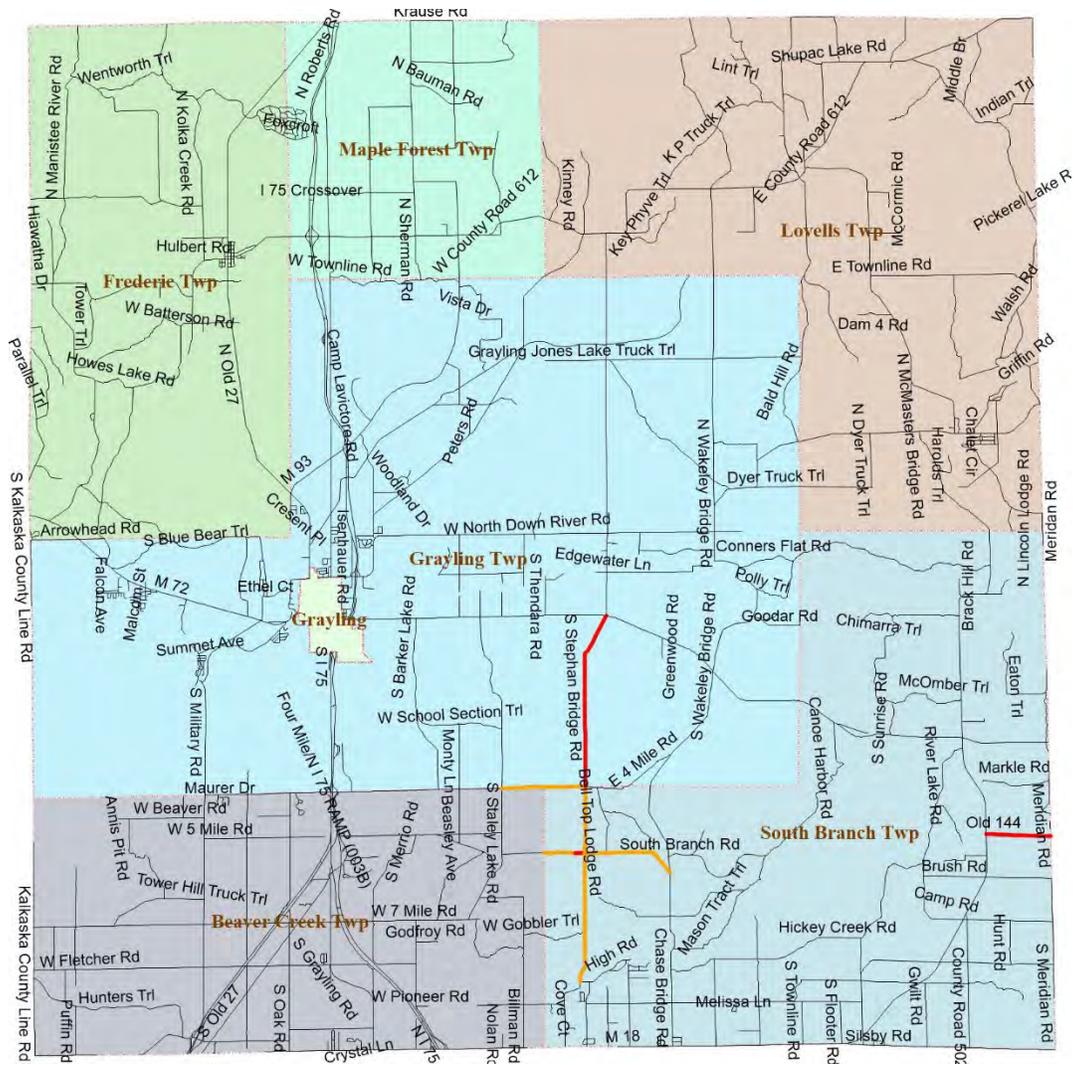


Figure 25: Map of the current IBR structural adequacy good (greater than 7'') shown in green, fair (4'' to 7'') shown in orange, and poor (less than 4'') shown in red. Only unpaved roads owned by CCRC are shown.

IBR ratings show that the primary unpaved roads are in good condition for width, and fair or poor condition for drainage and structure. The CCRC has a relatively small number of unpaved roads on the county primary system. The unpaved county local system has not been inventoried and rated as of yet. While it is not possible to upgrade all unpaved road surfaces, some of these roads do benefit from widening, ditching, herbicide control, and additional gravel. The CCRC will continue to improve unpaved roads with continued work as needed. When addressing local roads CCRC's staff works directly with Township officials to address their local concerns and needs.

## Goals

Goals help set expectations to how pavement conditions will change in the future. Pavement condition changes are influenced by water infiltration, soil conditions, sunlight exposure, traffic loading, and repair work performed. CCRC is not able to control any of these factors fully due to seasonal weather changes, traffic pattern changes, and its limited budget. In spite of the uncontrollable variables, it is still important to set realistic network condition goals that efficiently use budget resources to build and maintain roads meeting taxpayer expectations. An assessment of the progress toward these goals is provided in the *1. Pavement Assets: Gap Analysis* section of this plan.

### Goals for Paved County Primary Roads

The overall goal for CCRC's paved county primary road network is to maintain or improve road conditions network-wide at 2025 levels. The baseline condition for this goal is illustrated in Figure 26.

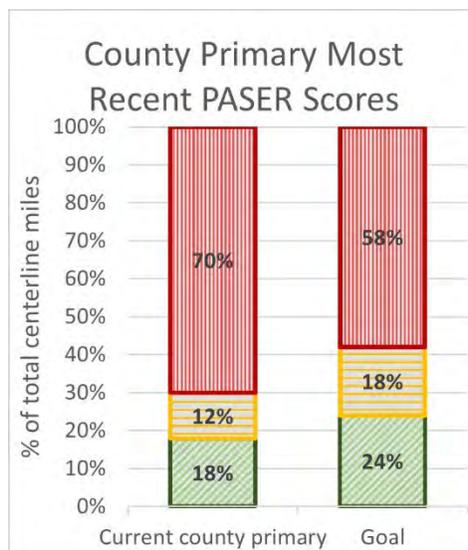


Figure 26: CCRC's 2025 county primary road network condition by percentage of good/fair/poor

CCRC's network-level pavement condition strategy for paved county primary roads is:

1. Prevent its good and fair (PASER 10 - 5) paved county primary from becoming poor (PASER 4 - 1).
2. Move 12 percent of paved county primary roads out of the poor category.

### Goals for Paved County Local Roads

The overall goal for CCRC's paved county local will be set in a future plan update once local roads have been inventoried and rated.

### **Goals for Unpaved Roads**

The overall goal for CCRC's unpaved road network is to maintain or improve road conditions network-wide at 2025 levels. The baseline condition for this goal is illustrated in Figure 27.

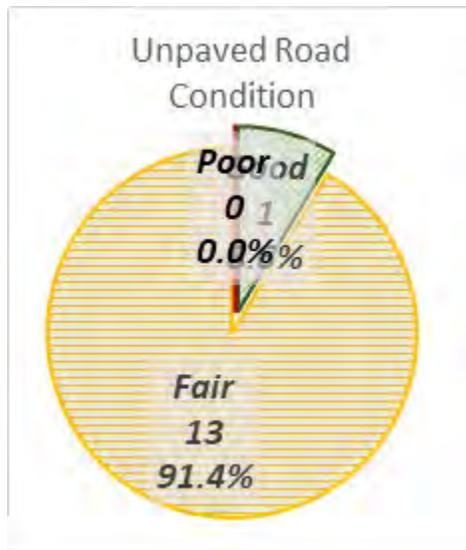


Figure 27: CCRC's 2025 unpaved road network condition by percentage of good/fair/poor

Our year-round unpaved roads will be maintained at their current IBR assessments any IBR elements rated good or fair. Structure or drainage will be improved where feasible and needed. Year-round unpaved roads that have either or both of these two categories assessed as poor will be strategically upgraded as funding is available to address, first, drainage issues and, then, structural issues. Surface widths will be addressed on an as-needed basis to provide service or to address safety issues. Seasonal roads will be addressed to provide passability and safety but do not have a goal associated with them.

### **Modelled Trends**

Roads age and deteriorate just like any other asset. All pavements are damaged by water, traffic weight, freeze/thaw cycles, sunlight, and traffic weight. To offset natural deterioration and normal wear-and-tear on the road, CCRC must complete treatment projects that either protect and/or add life to its pavements. The year-end condition of the whole network depends upon changes or preservation of individual road section condition that preservation treatments have affected.

CCRC uses many types of repair treatments for its roads, each selected to balance costs, benefits, and road life expectancy. When agency trends are modelled, any gap between goals and accomplishable work

becomes evident. Financial resources influence how much work can be accomplished across the network within agency budget and what treatments and strategies can be afforded; a full discussion of CCRC's financial resources can be found in the 5. *Financial Resources* section.

Treatments and strategies that counter pavement-damaging forces include reconstruction, structural improvement, capital preventive maintenance, innovative treatments, and maintenance. For a complete discussion on the pavement treatment tools, refer to the 1. *Introduction's Pavement Primer*.

Correlating with each PASER score are specific types of treatments best performed either to protect the pavement (CPM) or to add strength back into the pavement (structural improvement) (Table 1). MDOT provides guidance regarding when a specific pavement may be a candidate for a particular treatment. These identified PASER scores "trigger" the timing of projects appropriately to direct the right pavement fix at the right time, thereby providing the best chance for a successful project. The information provided in Table 1 is a guide for identifying potential projects; however, this table should not be the sole criteria for pavement treatment selection. Other information such as future development, traffic volume, utility projects, and budget play a role in project selection. This table should not be a substitute for engineering judgement. CCRC does use these criteria as a guide in determining what pavement treatments to use. However, due to the geographical location of Crawford County access to specialized contractors and processes is limited. Therefore, a chosen treatment may be financially inappropriate when compared to a similar treatment in which more than one contractor is readily available resulting in a competitive bid platform.

**Table 1: Service Life Extension (in Years) for Pavement Types Gained by Fix Type<sup>1</sup>**

Fix Type	Life Extension (in years)*			
	Flexible	Composite	Rigid	PASER
HMA crack treatment	1-3	1-3	N/A	6-7
Overband crack filling	1-2	1-2	N/A	6-7
One course non-structural HMA overlay	5-7	4-7	N/A	4-5****
Mill and one course non-structural HMA overlay	5-7	4-7	N/A	3-5
Single course chip seal	3-6	N/A	N/A	5-7†
Double chip seal	4-7	3-6	N/A	5-7†
Single course microsurface	3-5	**	N/A	5-6
Multiple course microsurface	4-6	**	N/A	4-6****
Ultra-thin HMA overlay	3-6	3-6	N/A	4-6****
Paver placed surface seal	4-6	**	N/A	5-7
Full-depth concrete repair	N/A	N/A	3-10	4-5***
Concrete joint resealing	N/A	N/A	1-3	5-8
Concrete spall repair	N/A	N/A	1-3	5-7
Concrete crack sealing	N/A	N/A	1-3	4-7
Diamond grinding	N/A	N/A	3-5	4-6
Dowel bar retrofit	N/A	N/A	2-3	3-5***
Longitudinal HMA wedge/scratch coat with surface treatment	3-7	N/A	N/A	3-5****
Flexible patching	**	**	N/A	N/A
Mastic joint repair	1-3	1-3	N/A	4-7
Cape seal	4-7	4-7	N/A	4-7
Flexible interlayer "A"	4-7	4-7	N/A	4-7
Flexible interlayer "B" (SAMI)	4-7	4-7	N/A	3-7
Flexible interlayer "C"	4-7	4-7	N/A	3-7
Fiber reinforced flexible membrane	4-7	4-7	N/A	3-7
Fog seal	**	**	N/A	7-10
GSB 88	**	**	N/A	7-10
Mastic surface treatment	**	**	N/A	7-10
Scrub seal	**	**	N/A	4-8

\* The time range is the expected life extending benefit given to the pavement, not the anticipated longevity of the treatment.

\*\* Data is not available to quantify the life extension.

\*\*\* The concrete slabs must be in fair to good condition.

\*\*\*\* Can be used on a pavement with a PASER equal to 3 when the sole reason for rating is rutting or severe raveling of the surface asphalt layer.

† For PASER 4 or less providing structural soundness exists and that additional pre-treatment will be required for example, wedging, bar seals, spot double chip seals, injection spray patching or other pre-treatments.

<sup>1</sup> Part of Appendix D-1 from *MDOT Local Agency Programs Guidelines for Geometrics on Local Agency Projects* 2017 Edition Approved Preventive Maintenance Treatments

### ***NCPP Network Quick Check to Forecast Future Trends***

The National Center for Pavement Preservation (NCPP) has developed an analysis method that gives an overall indicator of likely future road network condition trends. An example of this method along with a description is included as Appendix D.

The NCPP Quick Check works under the premise that a one-mile road segment loses one year of life each year that it is not treated with a maintenance, rehabilitation, or reconstruction project. For example, a 100-mile network loses 100 mile-years' worth of life each year that it is not treated. Construction and maintenance projects add life to a road network, offsetting the steady yearly loss. For example, an overlay project that is expected to last 10 years and constructed on 5 miles of pavement will add 10-years x 5 miles = 50 mile-years of improvement, which is about half the value lost in one year on the example 100-mile network. In order for the network to remain stable, an agency would need to complete projects every year that offset all of the mile-years of loss, for this example 100 mile-years.

#### ***Paved County Primary Roads***

Table 2 illustrates the calculations for the NCPP Quick Check method of CCRC's paved county primary road network. The treatments outlined in Table 2 are the average treatment volume of planned projects scheduled to be completed in 2026-2028. The *1. Pavement Assets: Planned Projects* section of this plan provides further detail. Results from the NCPP Quick Check for the paved county primary roads indicate the average volume of work that CCRC has been able to afford over the last five years is not keeping up with the natural deterioration of the road network due to age and use. Continuing the current treatment volume on this network will result in an ongoing deficit of 33 mile-years of project benefit to stabilize this trend and maintain current conditions.

<b>Treatment Name</b>	<b>Average Yearly Miles of Treatment</b>	<b>Years of Life</b>	<b>Mile-Years</b>
		1	
		2	
		7	
		10	
Mill & Overlay		10	
Crush & Shape	5	25	125
[Treatment 7]			
[Treatment 8]			
<b>Total</b>			<b>125</b>
<b>Gap Analysis: (Deficit)/Surplus</b>			<b>-33</b>

The NCPP analysis of CCRC planned projects from its currently-available budget does not allow CCRC to reach its pavement condition goal given the projects planned for the next three years. The decrease in

MTF funding due to decreased travel and improved fuel efficiency of vehicles and increases in construction costs due to inflation have directly attributed to this deficit. As construction costs stabilize or decrease, additional annual miles of treatments would eliminate this gap.

*Paved County Local Road*

Table 3 illustrates the calculations for the NCPP Quick Check method of CCRC’s paved county local road network. The treatments outlined in Table 3 are the average treatment volume of planned projects scheduled to be completed in 2026-2028. The *1. Pavement Assets: Planned Projects* section of this plan provides further detail. Results from the NCPP Quick Check for the paved county local roads indicate the average volume of work that CCRC has been able to afford over the last five years is keeping up with the natural deterioration of the road network due to age and use. Continuing the current treatment volume on this network will result in an ongoing surplus of 39 mile-years of project benefit to stabilize this trend and maintain current conditions.

<b>Table 3: NCPP Modelled Trends, Planned Projects, and Gap Analysis for 's Road Assets—Modelled Trends: NCPP Quick Check Method for Paved County Local Road Network (535.039 miles)</b>			
<b>Treatment Name</b>	<b>Average Yearly Miles of Treatment</b>	<b>Years of Life</b>	<b>Mile-Years</b>
		1	
		2	
		7	
		10	
Mill & Overlay		10	
Crush & Shape	2	20	40
[Treatment 7]			
[Treatment 8]			
<b>Total</b>			<b>40</b>
<b>Gap Analysis: (Deficit)/Surplus</b>			<b>39</b>

The NCPP analysis of CCRC’s planned projects from its currently available budget does allow CCRC to reach its pavement condition goals given the projects planned for the next three years. However, a complete inventory and rating of the county local road system has not been conducted. Once completed, the results of this NCPP Quick Check could produce different results.

## Planned Projects

CCRC plans construction and maintenance projects several years in advance. A multi-year planning threshold is required due to the time necessary to plan, design, and finance construction and maintenance projects on the paved county primary road network. This includes planning and programming requirements from state and federal agencies that must be met prior to starting a project and can include studies on environmental and archeological impacts, review of construction and design documents and

plans, documentation of rights-of-way ownership, planning and permitting for storm water discharges, and other regulatory and administrative requirements.

Per PA 499 of 2002 (later amended by PA 199 of 2007), road projects for the upcoming three years are required to be reported annually to the TAMC. Planned projects represent the best estimate of future activity; however, changes in design, funding, and permitting may require CCRC to alter initial plans. Project planning information is used to predict the future condition of the road networks that CCRC maintains. The *1. Pavement Assets: Modelled Trends* section of this plan provides a detailed analysis of the impact of the proposed projects on their respective road networks.

For 2026-2028, CCRC plans to do the following projects:

***Paved County Primary Projects***

CCRC is currently planning the construction and maintenance projects listed in Appendix A for the paved county primary road network. The locations of these projects are shown in Figure 28, Figure 29, and Figure 30. The total cost of these projects is approximately \$2,300,000.

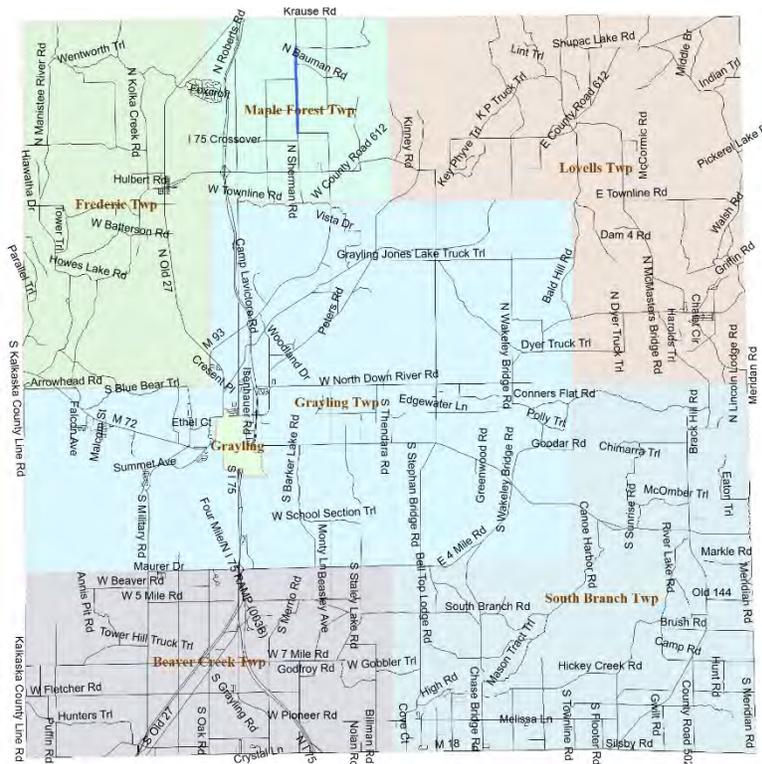


Figure 28: Map showing paved county primary road projects planned for 2026.

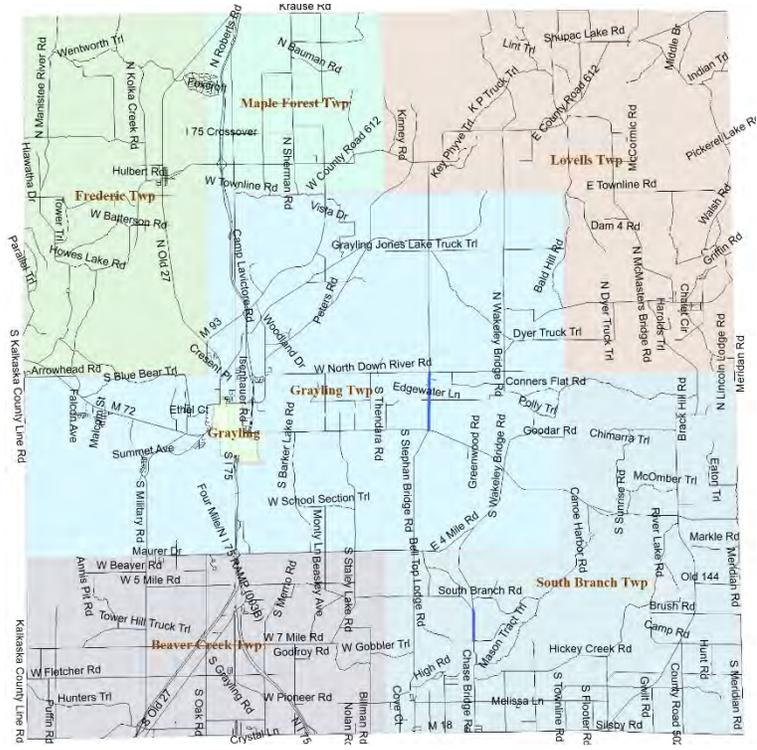


Figure 29: Map showing paved county primary road projects planned for 2027.

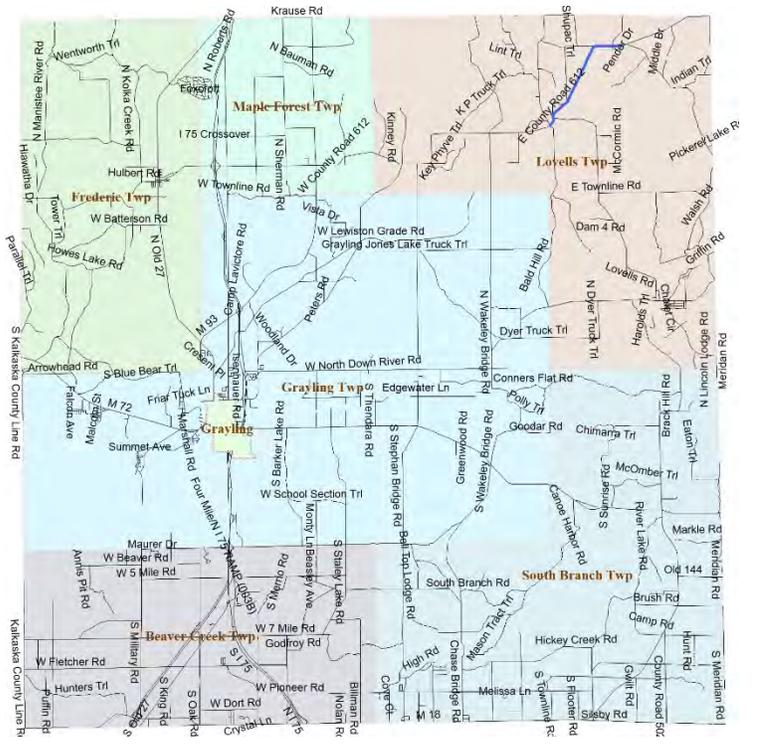


Figure 30: Map showing paved county primary road projects planned for 2028.

### *Paved County Local Projects*

CCRC is currently awaiting the construction and maintenance projects townships would like completed on the paved county local system. The CCRC is working with the townships to emphasize an asset management approach and the development of a 3-year project plan..

### *Unpaved Road Projects*

The CCRC currently has no planned construction or maintenance projects on the unpaved road network. Maintenance and repairs will be performed annually as needed.

## **Gap Analysis**

The current funding levels that CCRC receives are not sufficient to meet the goals for the paved county primary road network, the paved county local road network, and the unpaved road network. The *1. Pavement Assets: Goals* section of this plan provides further detail about the goals and the *1. Pavement Assets: Modelled Trends* section provides further detail on the shortfall given the current budget. However, CCRC believes that the overall condition of this network can be maintained or improved with additional funding for construction and maintenance. An alternate strategy may be used to overcome the current shortfall and meet the goals on the paved county primary road network, the paved county local road network, and the unpaved road network:

### *NCPP Network Quick Check to Meet Goals on the Paved County Primary and County Local Network*

The NCPP Quick Check can be used as an indicator of potential change in future pavement conditions based on the planned maintenance and construction work and the network size. This method is described in the *1. Pavement Assets: Modelled Trends* section of this plan and further detailed in Appendix D.

Table 4 and Table 5 illustrate the results of the NCPP Quick Check method. Table 4 shows that the paved county primary road network will have a deficit of 33 mile-years of improvement. Table 5 shows that the paved county local road network will have a surplus of 39 mile-years of improvement. To maintain current road conditions, the deficit must be overcome with a combination of maintenance and construction work.

**Table 4: NCPP Modelled Trends, Planned Projects, and Gap Analysis for 's Road Assets—Planned Projects and Gap Analysis: NCPP Quick Check Method for Paved County Primary Road Network (179.067 miles)**

<b>Planned Projects</b>			
<b>Treatment Name</b>	<b>Average Yearly Miles of Treatment</b>	<b>Years of Life</b>	<b>Mile-Years</b>
		1	
		2	
		7	
		10	
Mill & Overlay		10	
Crush & Shape	5	25	125
[Treatment 7]			
[Treatment 8]			
<b>Total</b>			<b>125</b>
<b>Gap Analysis: (Deficit)/Surplus</b>			<b>-33</b>
<b>Additional Annual Work Necessary To Overcome Deficit</b>			
<b>Treatment</b>	<b>Average Yearly Miles of Treatment</b>	<b>Years of Life</b>	<b>Mile-Years</b>
		1	
		2	
		7	
		10	
Mill & Overlay		10	
Crush & Shape	2	25	
[Treatment 7]			
[Treatment 8]			
<b>Total</b>			<b>50</b>
<b>Gap Analysis: (Deficit)/Surplus</b>			<b>17</b>

<b>Table 5: NCPP Modelled Trends, Planned Projects, and Gap Analysis for 's Road Assets—Planned Projects and Gap Analysis: NCPP Quick Check Method for Paved County Local Road Network (535.039 miles)</b>			
<b>Planned Projects</b>			
<b>Treatment</b>	<b>Average Yearly Miles of Treatment</b>	<b>Years of Life</b>	<b>Mile-Years</b>
		1	
		2	
		7	
		10	
Mill & Overlay		10	
Crush & Shape	2	20	40
[Treatment 7]			
[Treatment 8]			
<b>Total</b>			<b>40</b>
<b>Gap Analysis: (Deficit)/Surplus</b>			<b>39</b>
<b>Additional Work Necessary to Overcome Deficit</b>			
<b>Treatment</b>	<b>Average Yearly Miles of Treatment</b>	<b>Years of Life</b>	<b>Mile-Years</b>
		1	
		2	
		7	
		10	
Mill & Overlay		10	
Crush & Shape		20	
[Treatment 7]			
[Treatment 8]			
<b>Total</b>			
<b>Gap Analysis: (Deficit)/Surplus</b>			

Table 4 outlines the additional project work for the paved county primary road network that would be required in order to meet its goal of maintaining 2025 road conditions. The additional work on the paved county primary road network is anticipated to cost approximately \$1,000,000 per year. Table 5 shows that no additional project work for the paved county local road network would be required in order to meet its goal of maintaining 2025 road conditions. This could change after completion of the county local network inventory and assessment as noted earlier.

## 2. FINANCIAL RESOURCES

Public entities must balance the quality and extent of services they can provide with the tax resources provided by citizens and businesses, all while maximizing how efficiently funds are used. CCRC will overview its general expenditures and financial resources currently devoted to pavement maintenance and construction. This financial information is not intended to be a full financial disclosure or a formal report. Michigan agencies are required to submit an Act 51 Report to the Michigan Department of Transportation each year; this is a full financial report that outlines revenues and expenditures. This report can be obtained on our website at [crawford-crc.com](http://crawford-crc.com).

CCRC has a total budget for pavement asset management of \$2,700,000.

### **County Primary Network**

CCRC has historically spent \$1,800,000 annually on pavement-related projects. Over the next three years, CCRC plans to spend \$2,100,000 on county primary-network projects consisting of, but not limited to, reconstruction, overlay, culvert replacement, and preventive maintenance. Spending on projects depends on revenue from millages, and federal/state programs.

### **County Local Network**

CCRC has historically spent \$200,000 annually on pavement-related projects. Over the next three years, CCRC plans to spend \$900,000 on county local-network projects consisting of, but not limited to, reconstruction, overlay, culvert replacement, and preventive maintenance. Spending on projects depends on revenue from Michigan Transportation Fund (MTF), township contributions. Many local agencies in Michigan use local tax millages to supplement their road-funding budget. These taxes can provide for

additional construction and maintenance for new or existing roads that are also funded using MTF or MDOT funds. CCRC has local tax millages in its road-funding budget. County Wide Road millage, to be used on Primary Road Improvement, matching funds and engineering costs.

# 3. RISK OF FAILURE ANALYSIS

Transportation infrastructure is designed to be resilient. The system of interconnecting roads and bridges maintained by CCRC provides road users with multiple alternate options in the event of an unplanned disruption of one part of the system. There are, however, key links in the transportation system that may cause significant inconvenience to users if they are unexpectedly closed to traffic. Figure 43 illustrates the key transportation links in CCRC's road network, including those that meet the following types of situations:

- **Geographic divides:** Areas where a geographic feature (river, lake, mountain or limited access road) limits crossing points of the feature
- **Emergency alternate routes for high-volume roads:** Roads which are routinely used as alternate routes for high volume roads or roads that are included in an emergency response plan
- **Limited access areas:** Roads that serve remote or limited access areas that result in long detours if closed
- **Main access to key commercial districts:** Areas where large number or large size business will be significantly impacted if a road is unavailable.

Our road network includes the following critical assets: 4 Mile Road, North Down River Road, County Road 612, S Military Road, Old 27, and Sherman Road (see Figure 31).



# 4. COORDINATION WITH OTHER ENTITIES

An asset management plan provides a significant value for infrastructure owners because it serves as a platform to engage other infrastructure owners using the same shared right of way space. CCRC communicates with both public and private infrastructure owners to coordinate work in the following ways:

1. CCRC requires permits before the installation of any utility or work in the ROW.
2. CCRC informs utility owners during the project planning phase to discuss any possible conflicts that will need to be addressed during the design and engineering process.
3. CCRC contacts all utility owners during the project planning phase to determine if the utility has any future planned upgrade or replacement projects.

## PLANNING

Annually CCRC convenes an infrastructure planning summit in the last quarter of the year to take public comment on future Rural Task Force Projects. Representatives from all of the major public and private infrastructure owners that have assets in the road right of way are provided notice for the meeting and are invited to attend along with the public.

CCRC provides all attendees of the infrastructure planning summit with a list of all planned road projects for the next three years that include new pavement structure. Infrastructure owners are encouraged to discuss planned projects that would disrupt transportation services or cause damage to pavements. Projects which may cause damage to pavements in good or fair condition are discussed and mitigation

measures are proposed to minimize the impact to pavements. Mitigation measures could include rescheduling and coordinating projects to maximize value and minimize disruptions and cost to the public

## **APPENDIX A: 2026-2028 PAVED COUNTY PRIMARY ROAD PLANNED PROJECTS**

2026

Sherman Road from House Road to Calker Road – Crush, Shape and HMA - \$761,000

2027

Stephan Bridge Road from M-72 to North Down River Road - Crush, Shape and HMA - \$465,713

Chase Bridge Road from 7 Mile Road to Pere Cheney Road - Crush, Shape and HMA - \$254,000

2028

County Road 612 from Twin Bridge Road to Big Creek Bridge - Crush, Shape and HMA - \$903,713

## **APPENDIX B: 2026-2028 PAVED COUNTY LOCAL ROAD PLANNED PROJECTS**

Local road paving and upgrade projects are closely coordinated with Township Supervisors and Boards. Whenever possible future plans are budgeted for. In most cases Township project planning is on a yearly basis based on budgeting factors. At this time no specific projects are forecast for 2026-2028.

## **APPENDIX C: 2026-2028 UNPAVED ROAD PLANNED PROJECTS**

Local road unpaved road projects are closely coordinated with Township Supervisors and Boards. Whenever possible future plans are budgeted for. In most cases Township project planning is on a yearly basis based on budgeting factors. At this time no specific projects are forecast for 2026-2028

## APPENDIX D

# A Quick Check of Your Highway Network Health

*By Larry Galehouse, Director, National Center for Pavement Preservation  
and*

*Jim Sorenson, Team Leader, FHWA Office of Asset Management*

Historically, many highway agency managers and administrators have tended to view their highway systems as simply a collection of projects. By viewing the network in this manner, there is a certain comfort derived from the ability to match pavement actions with their physical/functional needs. However, by only focusing on projects, opportunities for strategically managing entire road networks and asset needs are overlooked. While the “bottom up” approach is analytically possible, managing networks this way can be a daunting prospect. Instead, road agency administrators have tackled the network problem from the “top down” by allocating budgets and resources based on historical estimates of need. Implicit in this approach, is a belief that the allocated resources will be wisely used and prove adequate to achieve desirable network service levels.

Using a quick checkup tool, road agency managers and administrators can assess the needs of their network and other highway assets and determine the adequacy of their resource allocation effort. A quick checkup is readily available and can be usefully applied with minimum calculations.

It is essential to know whether present and planned program actions (reconstruction, rehabilitation, and preservation) will produce a net improvement in the condition of the network. However, before the effects of any planned actions on the highway network can be analyzed, some basic concepts should be considered.

Assume every lane-mile segment of road in the network was rated by the number of years remaining until the end of life (terminal condition). Remember that terminal condition does not mean a failed road. Rather, it is the level of deterioration that management has set as a minimum operating condition for that road or network. Consider the rated result of the current network condition as shown in Figure 1.



Figure 1 – Current Condition

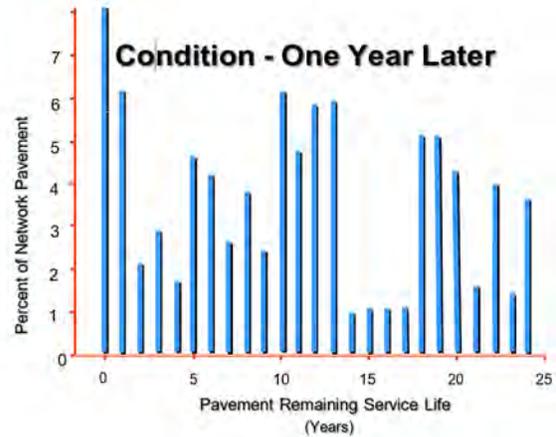


Figure 2 – Condition 1-Year Later

If no improvements are made for one year, then the number of years remaining until the end of life will decrease by one year for each road segment, except for those stacked at zero. The zero- stack will increase significantly because it maintains its previous balance and also becomes the recipient of those roads having previously been stacked with one year remaining. Thus, the entire network will age one year to the condition shown in Figure 2, with the net lane-miles in the zero stack raised from 4% to 8% of the network.

Some highway agencies still subscribe to the old practice of assigning their highest priorities to the reconstruction or rehabilitation of the worst roads. This practice of “worst first”, i.e., continually addressing only those roads in the zero-stack, is a proven death spiral strategy because reconstruction and rehabilitation are the most expensive ways to maintain or restore serviceability. Rarely does sufficient funding exist to sustain such a strategy.

The measurable loss of pavement life can be thought of as the network’s total lane-miles multiplied by 1 year, i.e., lane-mile-years. Consider the following quantitative illustration. Suppose your agency’s highway network consisted of 4,356 lane-miles. Figure 3 shows that without intervention, it will lose 4,356 lane-mile-years per year.

**Agency Highway Network = 4,356 lane miles**

*Each year the network will lose*

**4,356 lane-mile-years**

Figure 3 – Network Lane Miles

To offset this amount of deterioration over the entire network, the agency would need to annually perform a quantity of work equal to the total number of lane-mile-years lost just to maintain the status quo. Performing work which produces fewer than 4,356 lane-mile-years would lessen the natural decline of the overall network, but still fall short of maintaining the

status quo. However, if the agency produces more than 4,356 lane-mile-years, it will improve the network.

In the following example, an agency can easily identify the effect of an annual program consisting of reconstruction, rehabilitation, and preservation projects on its network. This assessment involves knowing the only two components for reconstruction and rehabilitation projects: lane-miles and design life of each project fix. Figure 4 displays the agency’s programmed activities for reconstruction and Figure 5 displays it for rehabilitation.

**Reconstruction Evaluation**

Projects this Year = 2

Project	Design Life	Lane Miles	Lane Mile Years	Lane Mile Cost	Total Cost
No. 1	25 yrs	22	550	\$463,425	\$10,195,350
No. 2	30 yrs	18	540	\$556,110	\$10,009,980
<b>Total =</b>			<b>1,090</b>		\$20,205,330

Figure 4 - Reconstruction

**Rehabilitation Evaluation**

Projects this Year = 3

Project	Design Life	Lane Miles	Lane Mile Years	Lane Mile Cost	Total Cost
No. 10	18 yrs	22	396	\$263,268	\$5,791,896
No. 11	15 yrs	28	420	\$219,390	\$6,142,920
No. 12	12 yrs	32	384	\$115,848	\$3,707,136
<b>Total =</b>			<b>1,200</b>		\$15,641,952

Figure 5 – Rehabilitation

When evaluating pavement preservation treatments in this analysis, it is appropriate to think in terms of “extended life” rather than design life. The term design life, as used in the reconstruction and rehabilitation tables, relates better to the new pavement’s structural adequacy to handle repetitive loadings and environmental factors. This is not the goal of pavement preservation. Each type of treatment/repair has unique benefits that should be targeted to the specific mode of pavement deterioration. This means that life extension depends on factors such as type and severity of distress, traffic volume, environment, etc. Figure 6 exhibits the agency’s programmed activities for preservation.

## Preservation Evaluation

Project	Life Extension	Lane Miles	Lane Mile Years	Lane Mile Cost	Total Cost
No. 101	2 yrs	12	24	\$2,562	\$30,744
No. 102	3 yrs	22	66	\$7,743	\$170,346
No. 103	5 yrs	26	130	\$13,980	\$363,480
No. 104	7 yrs	16	112	\$29,750	\$476,000
No. 105	10 yrs	8	80	\$54,410	\$435,280
<b>Total =</b>			<b>412</b>		\$1,475,850

Figure 6 – Preservation

To satisfy the needs of its highway network, the agency must accomplish 4,356 lane-mile-years of work per year. The agency’s program will derive 1,090 lane-mile-years from reconstruction, 1,200 lane-mile-years from rehabilitation, and 412 lane-mile-years from pavement preservation, for a total of 2,702 lane-mile-years. Thus, these programmed activities fall short of the minimum required to maintain the status quo, and hence would contribute to a net loss in network pavement condition of 1,653 lane-mile-years. The agency’s programmed tally is shown in Figure 7.

## Network Trend

Programmed Activity	Lane-Mile-Years	Total Cost
Reconstruction	1,090	\$20,205,330
Rehabilitation	1,200	\$15,641,952
Preservation	412	\$1,475,850
<b>Total</b>	<b>2,702</b>	<b>\$37,323,132</b>
Network Needs (Loss)	( - ) 4,356	
<b>Deficit =</b>	<b>- 1,654</b>	

Figure 7 – Programmed Tally

This exercise can be performed for any pavement network to benchmark its current trend. Using this approach, it is possible to see how various long-term strategies could be devised and evaluated against a policy objective related to total-network condition.

Once the pavement network is benchmarked, an opportunity exists to correct any shortcomings in the programmed tally. A decision must first be made whether to improve the

network condition or just to maintain the status quo. This is a management decision and system goal.

Continuing with the previous example, a strategy will be proposed to prevent further network deterioration until additional funding is secured.

The first step is to modify the reconstruction and rehabilitation (R&R) programs. An agonizing decision must be made about which projects to defer, eliminate, or phase differently with multi-year activity. In Figure 8, reductions are made in the R&R programs to recover funds for less costly treatments in the pavement preservation program. The result of this decision recovered slightly over \$6 million.

**Program Modification**

<u>Programmed Activity</u>	<u>Lane-Mile-Years</u>	<u>Cost Savings</u>
Reconstruction <i>31 lane miles</i> ( <del>40 lane miles</del> )	<i>820</i> ( <del>1,090</del> )	<b>\$5,004,990</b>
Rehabilitation <i>77 lane miles</i> ( <del>82 lane miles</del> )	<i>1,125</i> ( <del>1,200</del> )	<b>\$1,096,950</b>
Pavement Preservation ( 84 lane-miles )	( 412 )	<b>0</b>
<b>Total =</b>	<b><i>2,357</i></b> <b>( 2,702 )</b>	<b>\$6,101,940</b>

Figure 8 – Revised R & R Programs

Modifying the reconstruction and rehabilitation programs has reduced the number of lane-mile-years added to the network from 2,702 to 2,357 lane-mile-years. However, using less costly treatments elsewhere in the network to address roads in better condition will increase the number of lane-mile-years added to the network. A palette of pavement preservation treatments, or mix of fixes, is available to address the network needs at a much lower cost than traditional methods.

Preservation treatments are only suitable if the right treatment is used on the right road at the right time. In Figure 9, the added treatments used include concrete joint resealing, thin hot-mix asphalt (HMA) overlay ( $\leq 1.5''$ ), microsurfacing, chip seal, and crack seal. By knowing the cost per lane-mile and the treatment life-extension, it is possible to create a new strategy (costing \$36,781,144) that satisfies the network need. In this example, the agency saved in excess of \$500,000 from traditional methods (costing \$37,323,132), while erasing the 1,653 lane-mile-year deficit produced by the initial program tally. Network Strategy

Programmed Activity	Lane Mile Years	Total Cost
Reconstruction ( 31 lane-miles )	820	\$15,200,340
Rehabilitation ( 77 lane-miles )	1,125	\$14,545,002
Pavement Preservation (84 lane-miles)	412	\$1,475,850
Concrete Resealing (4 years x 31 lane-miles)	124	\$979,600
Thin HMA Overlay (10 years x 16 lane-miles)	160	\$870,560
Microsurfacing (7 years x 44 lane-miles)	308	\$1,309,000
Chip Seal (5 years x 79 lane-miles)	395	\$1,104,420
Crack Seal (2 years x 506 lane-miles)	1,012	\$1,296,372
Total =	4,356	\$36,781,144

Figure 9 – New Program Tally

In a real-world situation, the highway agency would program its budget to achieve the greatest impact on its network condition. Funds allocated for reconstruction and rehabilitation projects must be viewed as investments in the infrastructure. Conversely, funds directed for preservation projects must be regarded as protecting and preserving past infrastructure investments.

Integrating reconstruction, rehabilitation, and preservation in the proper proportions will substantially improve network conditions for the taxpayer while safeguarding the highway investment.

**APPENDIX E: MEETING MINUTES VERIFYING PLAN  
ACCEPTANCE BY GOVERNING BODY**



## **B. BRIDGE ASSET MANAGEMENT PLAN**

An attached bridge asset management plan follows.

# Crawford County Road Commission 2025 Bridge Asset Management Plan

A plan describing the Crawford County Road Commission's transportation assets and conditions

*Prepared by:*  
Donald Babcock  
Managing Director  
Crawford County Road Commission



# CONTENTS

- Table of Figures ..... ii
- Table of Tables ..... ii
- Executive Summary ..... iii
- Introduction..... 1**
  - Bridge Primer* ..... 2
- 1. Bridge Assets ..... 8**
  - Inventory* ..... 9
  - Goals* ..... 12
  - Prioritization, Programmed/Funded Projects, and Planned Projects*..... 13
  - Gap Analysis* ..... 19
- 2. Financial Resources ..... 20**
  - Anticipated Revenues* ..... 20
  - Anticipated Expenses* ..... 20
- 3. Risk Management ..... 21**
  - Appendix 1 ..... 23
  - Appendix 2 ..... 26
  - Appendix 3 ..... 27
  - Appendix 4 ..... 28
  - Appendix 5 ..... 29

# TABLE OF FIGURES

Figure 1: Girder bridge .....	2
Figure 2: Slab bridge .....	2
Figure 3: Truss bridge.....	2
Figure 4: Three-sided box bridge .....	2
Figure 5: Examples of common bridge construction materials used in Michigan.....	3
Figure 6: Diagram of basic elements of a bridge.....	4
Figure 7: Map illustrating locations CCRC’s of bridge assets.....	10
Figure 8: Progress tracking graph indicating CCRC’s historic and current bridge conditions, projected trends, and goals. ....	12

# TABLE OF TABLES

Table 1: Summary of the NBI Rating Scale .....	3
Table 2: Bridge Assets by Type: Inventory, Size, and Condition.....	11
Table 3: Summary of Preservation Criteria .....	13
Table 4: Cost Projection Table .....	18
Table 5: Bridges that are Considered Scour Critical.....	21
Table 6: Posted or Close Bridges that are Critical Links.....	22

# EXECUTIVE SUMMARY

As conduits for commerce and connections to vital services, bridges are among the most important assets in any community along with other assets like roads, culverts, traffic signs, traffic signals, and utilities that support and affect the road network. The Crawford County Road Commission's (CCRC) bridges, other road-related assets, and support systems are some of the most valuable and extensive public assets, all of which are paid for with taxes collected from ordinary citizens and businesses. The cost of building and maintaining bridges, their importance to society, and the investment made by taxpayers all place a high level of responsibility on local agencies to plan, build, and maintain the road and bridge network in an efficient and effective manner. This asset management plan is intended to report on how CCRC is meeting its obligations to maintain the bridges for which it is responsible.

This plan overviews CCRC's bridge assets and conditions and explains how Crawford County Road Commission works to maintain and improve the overall condition of those assets. These explanations can help answer:

- What kinds of bridge assets CCRC has in its jurisdiction and the different options for maintaining these assets.
- What tools and processes CCRC uses to track and manage bridge assets and funds.
- What condition CCRC's bridge assets are in compared to statewide averages.
- Why some bridge assets are in better condition than others and the path to maintaining and improving bridge asset conditions through proper planning and maintenance.
- How agency bridge assets are funded and where those funds come from.
- How funds are used and the costs incurred during CCRC's bridge assets' normal life cycle.
- What condition CCRC can expect of its bridge assets if those assets continue to be funded at the current funding levels
- How changes in funding levels can affect the overall condition of all of CCRC's bridge assets.

CCRC owns and/or manages 21 bridges. A summary of its historical and current bridge asset conditions, projected trends, and goals can be seen in the figure, below.



An asset management plan is required by Michigan Public Act 325 of 2018, and this document represents fulfillment of some of CCRC’s obligations towards meeting these requirements. This asset management plan also helps demonstrate CCRC’s responsible use of public funds by providing elected and appointed officials as well as the general public with inventory and condition information of CCRC’s bridge assets, and gives taxpayers the information they need to make informed decisions about investing in essential transportation infrastructure.

# INTRODUCTION

Asset management is defined by Public Act 325 of 2018 as “an ongoing process of maintaining, preserving, upgrading, and operating physical assets cost effectively, based on a continuous physical inventory and condition assessment and investment to achieve established performance goals”. In other words, asset management is a process that uses data to manage and track assets, like roads and bridges, in a cost-effective manner using a combination of engineering and business principles. This process is endorsed by leaders in municipal planning and transportation infrastructure, including the Michigan Municipal League, County Road Association of Michigan, the Michigan Department of Transportation (MDOT), and the Federal Highway Administration (FHWA). The Crawford County Road Commission is supported in its use of asset management principles and processes by the Michigan Transportation Asset Management Council (TAMC), formed by the State of Michigan.

Asset management, in the context of this plan, ensures that public funds are spent as effectively as possible to maximize the condition of the bridges in Crawford County Road Commission’s road network. Asset management also provides a transparent decision-making process that allows the public to understand the technical and financial challenges of managing infrastructure with a limited budget.

The Crawford County Road Commission (CCRC) has adopted an “asset management” business process to overcome the challenges presented by having limited financial, staffing, and other resources while needing to meet safety standards and bridge users’ expectations. CCRC is responsible for maintaining and operating 21 bridges.

This 2025 plan outlines how CCRC determines its strategy to maintain and upgrade bridge asset condition given agency goals, priorities of its bridge users, and resources provided. An updated plan is to be released approximately every three years to reflect changes in bridge conditions, finances, and priorities.

Questions regarding the use or content of this plan should be directed to Donald Babcock at 500 Huron St, Grayling, MI 49738 or at (989) 348-2281 and/or [dabcrawford1215@gmail.com](mailto:dabcrawford1215@gmail.com). A copy of this plan can be accessed on our website at [crawford-crc.com](http://crawford-crc.com).

Key terms used in this plan are defined in CCRC’s comprehensive transportation asset management plan (also known as the “compliance plan”) used for compliance with PA 325 or 2018.

Knowing the basic features of an asset class is a crucial starting point to understanding the rationale behind an asset management approach. The following primer provides an introduction to bridges.

## Bridge Primer

### ***Bridge Types***

Bridges are structures that span 20 feet or more. These bridges can extend across one or multiple spans.

If culverts are placed side by side to form a span of 20 feet or more (for example, three 6-foot culverts with one-foot between each culvert), then this culvert system would be defined as a bridge. (Note: The Compliance Plan Appendix C contains a primer on culverts not defined as bridges.)

Bridge types are classified based on two features: design and material.

The most common bridge design is the **girder system** (Figure 1). With this design, the bridge deck transfers vehicle loads to girders (or beams) that, in turn, transfer the load to the piers or abutments (see Figure 6).

A similar design that lacks girders (or beams) is a **slab bridge** (Figure 2, and see Figure 6). A slab bridge transfers the vehicle load directly to the abutments and, if necessary, piers.

**Truss bridges** were once quite common and consist of a support structure that is created when structural members are connected at joints to form interconnected triangles (Figure 4). Structural members may consist of steel tubes or angles connected at joints with gusset plates.

Another common bridge design in Michigan is the three-sided pre-cast box or arch bridge (Figure 4).

Michigan is also home to several unique bridge designs.

Adding another layer of complexity to bridge typing is the primary construction materials used (Figure 5). Bridges are generally constructed from concrete, steel, pre-stressed concrete, or timber. Some historical bridges or bridge components in Michigan may be constructed from stone or masonry.



Figure 1: Girder bridge



Figure 2: Slab bridge



Figure 3: Truss bridge



Figure 4: Three-sided box bridge



Figure 5: Examples of common bridge construction materials used in Michigan

## Bridge Condition

Michigan inspectors rate bridge condition on a 0-9 scale known as the National Bridge Inventory (NBI) rating scale (see Table for a summary of the NBI Rating scale). Elements of the bridge’s superstructure, deck, and substructure receive a 9 if they are in excellent condition down to a 0 if they are in failed condition. A complete guide for Michigan bridge condition rating according to the NBI can be found in the MDOT Bridge Field Services’ *Bridge Safety Inspection NBI Rating Guidelines* ([https://www.michigan.gov/documents/mdot/BIR\\_Ratings\\_Guide\\_Combined\\_2017-10-30\\_606610\\_7.pdf](https://www.michigan.gov/documents/mdot/BIR_Ratings_Guide_Combined_2017-10-30_606610_7.pdf)).

Table 1: Summary of the NBI Rating Scale	
NBI Rating	General Condition
9-7	Like new/good
6-5	Fair
4-3	Poor/serious
2-0	Critical/failed

## Bridge Treatments

### Replacement

Replacement work is typically performed when a bridge is in poor condition (NBI rating of 4 or less) and will improve the bridge to good condition (NBI rating of 7 or more). The Local Bridge Program, a part of MDOT’s Local Agency Program, defines bridge replacement as full replacement, which removes the entire bridge (superstructure, deck, and substructure) before re-building a bridge at the same location (Figure 6). The decision to perform a total replacement over rehabilitation (see below) should be made based on a life-cycle cost analysis. Generally, replacement is selected if rehabilitation costs more than two-thirds of the cost of replacement. Replacement is generally the most expensive of the treatment options.

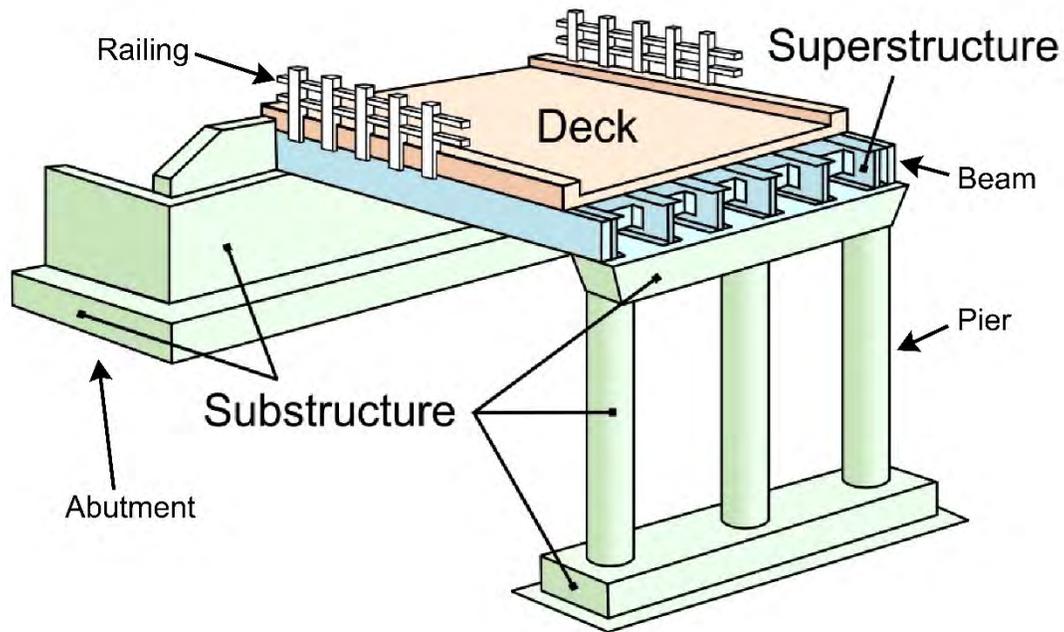


Figure 6: Diagram of basic elements of a bridge

### ***Rehabilitation***

Rehabilitation involves repairs that improve the existing condition and extend the service life of the structure and the riding surface. Most often, rehabilitation options are associated with bridges that have degraded beyond what can be fixed with preventive maintenance. Rehabilitation is typically performed on poor-rated elements (NBI rating of 4 or less) to improve them to fair or good condition (NBI rating of 5 or more). Rehabilitation can include superstructure replacement (removal and replacement of beams and deck) or deck replacement. While typically more expensive than general maintenance, rehabilitation treatments may be more cost-effective than replacing the entire structure.

- **Railing retrofit/replacement:** A railing retrofit or replacement either reinforces the existing railing or replaces it entirely (Figure 6). This rehabilitation is driven by a need for safety improvements on poor-rated railings or barriers (NBI rating less than 5).
- **Beam repair:** Beam repair corrects damage that has reduced beam strength (Figure 6). In the case of steel beams, it is performed if there is 25 percent or more of section loss in an area of the beam that affects load-carrying capacity. In the case of concrete beams, this is performed if there is 50 percent or more spalling (i.e., loss of material) at the ends of beams.
- **Substructure concrete patching and repair:** Patching and repairing the substructure is essential to keep a bridge in service. These rehabilitation efforts are performed when the abutments or piers are fair or poor (NBI rating of 5 or 4), or if spalling and delamination affect less than 30 percent of the bridge surface.

## ***Preventive Maintenance***

The Federal Highway Administration's (FHWA) *Bridge Preservation Guide* (2018) defines preventive maintenance as "a strategy of extending service life by applying cost-effective treatments to bridge elements...[that] retard future deterioration and avoid large expenses in bridge rehabilitation or replacements."

Preventive maintenance work is typically done on bridges rated fair (NBI rating of 5 or 6) in order to slow the rate of deterioration and keep them from falling into poor condition.

- **Concrete deck overlay:** A concrete deck overlay involves removing and replacing the driving surface. Typically, this is done when the deck surface is poor (NBI rating is less than 5) and the underneath portion of the deck is at least fair (NBI rating greater than 4). A shallow or deep concrete overlay may be performed depending on the condition of the bottom of the deck. The MDOT *Bridge Deck Preservation* matrices provide more detail on concrete deck overlays (see [https://www.michigan.gov/mdot/0,4616,7-151-9625\\_24768\\_24773---,00.html](https://www.michigan.gov/mdot/0,4616,7-151-9625_24768_24773---,00.html)).
- **Deck repairs:** Deck repairs include three common techniques: HMA overlay with or without waterproof membranes, concrete patching, deck sealing, crack sealing, and joint repair/replacement. An HMA overlay with an underlying waterproof membrane can be placed on bridge decks with a surface rating of fair or lower (NBI of 5 or less) and with deficiencies that cover between 15 and 30 percent of the deck surface and deck bottom. An HMA overlay without a waterproof membrane should be used on a bridge deck with a deck surface and deck bottom rating of serious condition or lower (NBI rating of 3 or less) and with deficiencies that cover greater than 30 percent of the deck surface and bottom; this is considered a temporary holdover to improve ride quality when a bridge deck is scheduled to undergo major rehabilitation within five years. All HMA overlays need to be accompanied by an updated load rating. Patching of the concrete on a bridge deck is done in response to an inspector's work recommendation or when the deck surface is in good, satisfactory, or fair condition (NBI rating of 7, 6, or 5) with minor delamination and spalling. To preserve a good bridge deck in good condition, a deck sealer can be used.

Deck sealing should only be done when the bridge deck has surface rating of fair or better (NBI of 5 or more). Concrete sealers should only be used when the top and bottom surfaces of the deck are free from major deficiencies, cracks, and spalling. An epoxy overlay may be used when between 2 and 5 percent of the deck surface has delaminations and spalls, but these deficiencies must be repaired prior to the overlay. An epoxy overlay may also be used to repair an existing epoxy overlay. Concrete crack sealing is an option to maintain concrete in otherwise good condition that has visible cracks with the potential of reaching the steel reinforcement. Crack sealing may be performed on concrete with a surface rating of good, satisfactory, or fair (NBIS rating of 7, 6, or 5) with minor surface spalling and delamination; it may also be performed in response to a work recommendation by an inspector who has determined that the frequency and size of the cracks require sealing.

- **Steel bearing repair/replacement:** Rather than sitting directly on the piers, a bridge superstructure is separated from the piers by bearings. Bearings allow for a certain degree of movement due to temperature changes or other forces. Repairing or replacing the bearings is considered preventive maintenance. Girders and a deck in at least fair condition (NBI of 5 or higher) and bearings in poor condition (NBI rating of 4 or less) identifies candidates for this maintenance activity.
- **Painting:** Re-painting a bridge structure can either be done in totality or in part. Total re-painting is done in response to an inspector's work recommendation or when the paint condition is in serious condition (NBI rating of 3 or less). Partial re-painting can either consist of zone re-painting, which is a preventive maintenance technique, or spot re-painting, which is scheduled maintenance (see below). Zone re-painting is done when less than 15 percent of the paint in a smaller area, or zone, has failed while the rest of the bridge is in good or fair condition. It is also done if the paint condition is fair or poor (NBI rating of 5 or 4).
- **Channel improvements:** Occasionally, it is necessary to make improvements to the waterway that flows underneath the bridge. Such channel improvements are driven by an inspector's work recommendation based on a hydraulic analysis or to remove vegetation, debris, or sediment from the channel and banks (Figure 6).
- **Scour countermeasures:** An inspector's work recommendations or a hydraulic analysis may require scour countermeasures (see the *Risk Management* section of this plan for more information on scour). This is done when a structure is categorized as scour critical and is not scheduled for replacement or when NBI comments in abutment and pier ratings indicate the presence of scour holes.
- **Approach repaving:** A bridge's approach is the transition area between the roadway leading up to and away from the bridge and the bridge deck. Repaving the approach areas is performed in response to an inspector's work recommendation, when the pavement surface is in poor condition (NBI rating of 4 or less), or when the bridge deck is replaced or rehabilitated (e.g., concrete overlay).
- **Guardrail repair/replacement:** A guardrail is a safety feature on many roads and bridges that prevents or minimizes the effects of lane departure incidents. Keeping bridge guardrails in good condition is important. Repair or replacement of bridge guardrail should be done when a guardrail is missing or damaged, or when it needs a safety improvement.

### ***Scheduled Maintenance***

Scheduled maintenance activities are those activities or treatments that are regularly scheduled and intend to maintain serviceability while reducing the rate of deterioration.

- **Superstructure washing:** Washing the superstructure, or the main structure supporting the bridge, typically occurs in response to an inspector's work recommendation or when salt-

contaminated dirt and debris collected on the superstructure is causing corrosion or deterioration by trapping moisture.

- **Drainage system cleanout/repair:** Keeping a bridge's drainage system clean and in good working order allows the bridge to shed water effectively. An inspector's work recommendation may indicate drainage system cleanout/repair. Signs that a drainage system needs cleaning or repair include clogs and broken, deteriorated, or damaged drainage elements.
- **Spot painting:** Spot painting is a form of partial bridge painting. This scheduled maintenance technique involves painting a small portion of a bridge. Generally, this is done in response to an inspector's work recommendation and is used for zinc-based paint systems only.
- **Slope repair/reinforcement:** The terrain on either side of the bridge that slopes down toward the channel is called the slope. At times, it is necessary to repair the slope. Situations that call for slope repair include when the slope is degraded, when the slope has significant areas of distress or failure, when the slope has settled, or if the slope is in fair or poor condition (NBI rating of 5 or less). Other times, it is necessary to reinforce the slope. Reinforcement can be added by installing Riprap, which is a side-slope covering made of stones. Riprap protects the stability of side slopes of channel banks when erosion threatens the surface.
- **Vegetation control and debris removal:** Keeping the area around a bridge structure free of vegetation and debris safeguards the bridge structure from these potentially damaging forces. Removing or restricting vegetation around bridges prevents damage to the structure. Vegetation control is done in response to an inspector's work recommendation or when vegetation traps moisture on structural elements or is growing from joints or cracks. Debris in the water channel or in the bridge can also cause damage to the structure. Removing this debris is typically done in response to an inspector's work recommendation or when vegetation, debris, or sediment accumulates on the structure or channel.
- **Miscellaneous repairs:** These are uncategorized repairs in response to an inspector's work recommendation.

# 1. BRIDGE ASSETS

CCRC seeks to implement an asset management program for its bridge structures. This program balances the decision to perform reconstruction, rehabilitation, preventive maintenance, scheduled maintenance, or new construction, with CCRC's bridge funding in order to maximize the useful service life and to ensure the safety of the local bridges under its jurisdiction. In other words, CCRC's bridge asset management program aims to preserve and/or improve the condition of its local bridge network within the means of its financial resources.

Nonetheless, CCRC recognizes that limited funds are available for improving the bridge network. Since preservation strategies like preventive maintenance are generally a more effective use of these funds than costly alternative management strategies like major rehabilitation or replacement, CCRC seeks to identify those bridges that will benefit from a planned maintenance program while addressing those bridges that pose usability and/or safety concerns.

The three-fold goal of CCRC's asset management program is the preservation and safety of its bridge network, increase of its bridge assets' useful service life by extending of the time that bridges remain in good and fair condition, and reduction of future maintenance costs. To quantify this goal, CCRC specifically aims to have to have 100% or more of the agency's local bridges in fair to good condition and to have less than 0% classify as structurally deficient over its three-year plan.

Thus, CCRC's asset management plan objectives are:

- To establish the current condition of the county's bridges
- To develop a "mix of fixes" that will:
  - Program scheduled maintenance actions to impede deterioration of bridges in good condition
  - Implement selective corrective repairs or rehabilitation for degraded bridge elements order to restore functionality
  - Identify and program those eligible bridges in need of replacement
- To identify available funding sources, such as:

- Dedicated county resources
- County funding through Michigan’s Local Bridge Program
- Opportunities to obtain other funding
- To prioritize the programmed actions within available funding limitations
- To improve the condition of bridges currently rated poor (4 or lower) and preserve bridges currently rated fair (5) or higher in their current condition in order to extend their useful service life.

## **Inventory**

CCRC is responsible for 21 local bridges. Table 2 summarizes CCRC’s bridge assets by type, sizes by bridge type, and condition by bridge type. Additional inventory data, condition ratings, and proposed preventive maintenance actions for each bridge are contained in the tables in Appendixes 3, 4, and 5. The bridge inventory data was obtained from MDOT MiBRIDGE and other sources, and the 2024 condition data and maintenance actions are taken from the inspector’s summary report (see Appendix 2).

### ***Types***

Of the CCRC’s 21 structures, 0 are concrete bridges, 3 are steel bridges, 8 are pre-stressed concrete bridges, and 10 are timber bridges.

### ***Locations and Sizes***

Figure 7 illustrates the locations of bridge assets owned by CCRC. Details about the locations and sizes of each individual asset can be found in CCRC’s MiBRIDGE database. For more information, please refer to the agency contact listed in the *Introduction* of this bridge asset management plan.

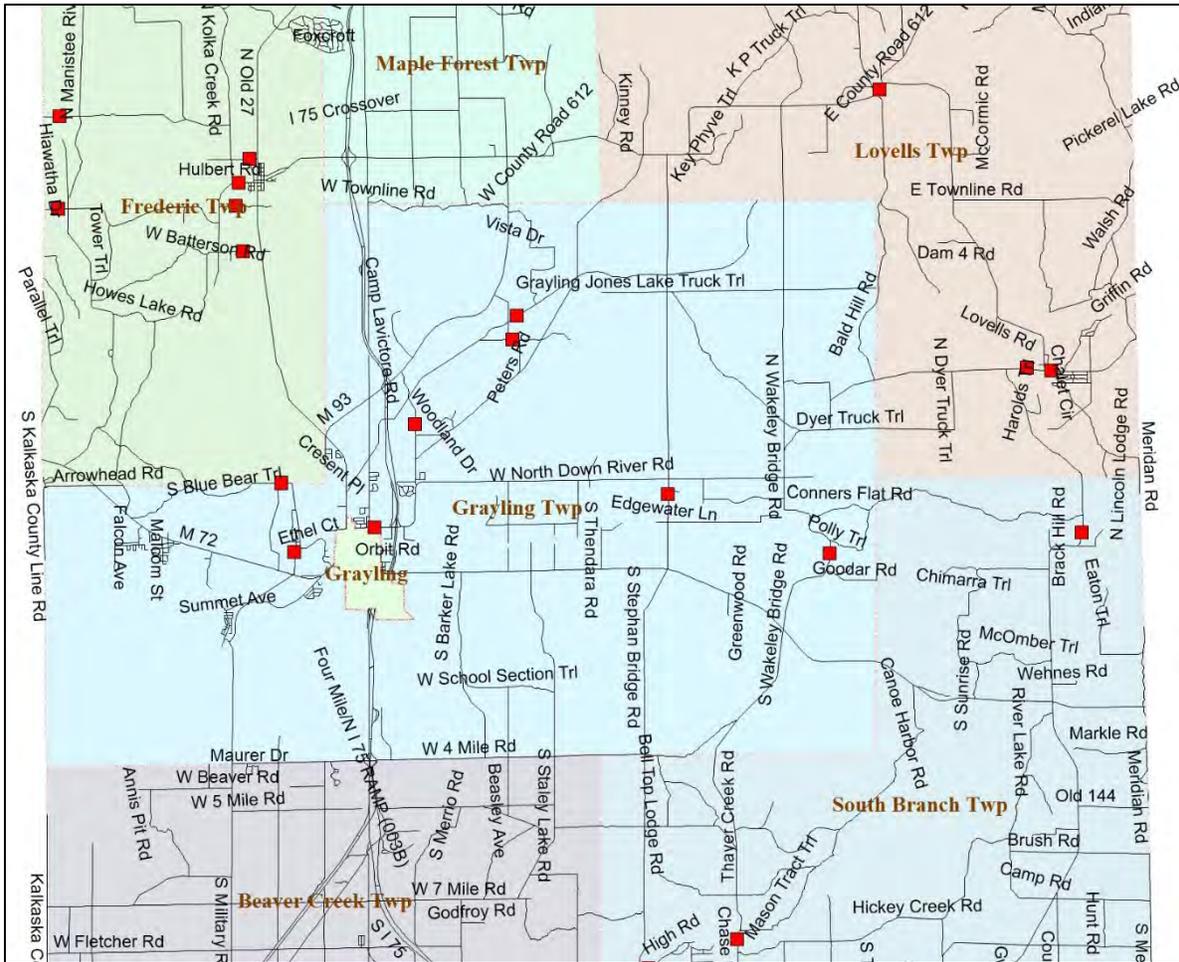


Figure 7: Map illustrating locations CCRC's of bridge assets

### Condition

CCRC evaluates its bridges according to the National Bridge Inspection Standards rating scale, with a rating of 9 to 7 being like new to good condition, a rating of 6 and 5 being fair condition, and a rating of 4 or lower being poor or serious/critical condition. The current condition of CCRC's bridge network is 8 (38%) are good, 12 (57%) are fair, and 1 (5%) are poor or lower.

Another layer of classification of CCRC's bridge inventory classifies 1 (5%) bridges as structurally deficient, 2 (10) bridges as posted, and 0 (0) bridges as closed. Structurally deficient bridges are those with a deck, superstructure, substructure, and/or culvert rated as "poor" according to the NBI rating scale, with a load-carrying capacity significantly below design standards, or with a waterway that regularly overtops the bridge during floods. Posted bridges are those that have declined in condition to a point where a restriction is necessary for what would be considered a safe vehicular or traffic load passing over the bridge; designating a bridge as "posted" has no influence on its condition rating. Closed bridges are those that are closed to all traffic; closing a bridge is contingent upon its ability to carry a set minimum live load.



## Goals

The goal of CCRC’s asset management program is the preservation and safety of its bridge network; it also aims to extend the period of time that bridges remain in good and fair condition, thereby increasing their useful service life and reducing future maintenance costs.

Specifically, this goal translates into long-range goals of having 100% of its bridges rated fair/good and having less than 0% classify as structurally deficient within three years. These goals are juxtaposed with the historic and current condition and the projected trend in Figure 8.

Several metrics will be used to assess the effectiveness of this asset management program. CCRC will monitor and report the annual change in the number of its bridges rated fair/good (5 or higher) and the annual change in the number of its bridges classified as structurally deficient.

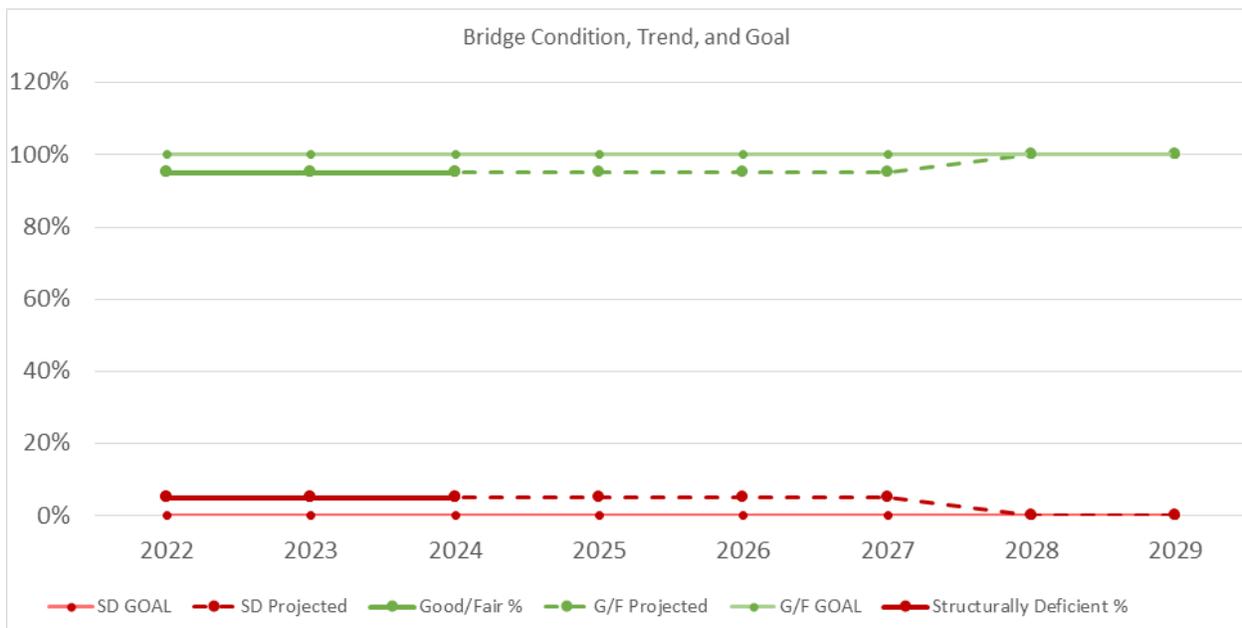


Figure 8: Progress tracking graph indicating CCRC’s historic and current bridge conditions, projected trends, and goals.

Based on past inspection records and condition ratings, CCRC will establish a baseline of past performance by determining the average period of time that a bridge remains in good or fair condition. The performance measure will be the increased average amount of time a bridge is in the good or fair condition status after implementation of the asset management strategy when compared to the baseline time before implementation.

# Prioritization, Programmed/Funded Projects, and Planned Projects

## Prioritization

CCRC’s asset management program aims to address the structures of critical concern by targeting elements rated as being in poor condition and to improve and maintain the overall condition of the bridge network to good or fair condition through a “mix of fixes” strategy. Therefore, CCRC prioritizes bridges for projects by evaluating five factors and weighting them as follows: condition –20%, load capacity – 25%, traffic –20%, safety –30%, and detour –5%. There are several components within each factor that are used to arrive at its score. Each project under consideration is scored, and its total score is then compared with other proposed project to establish a priority order.

CCRC annually reviews the current condition of each of the its bridges using the NBIS inspection data contained in the *MDOT Bridge Safety Inspection Report* and the inspector’s work recommendations contained in MDOT’s *Bridge Inspection Report*. The inspection inventory and condition data are consolidated in spreadsheet format for CCRC’s bridges in Appendix 3. CCRC then determines management and preservation needs and corresponding actions for each bridge(Appendix 4) As well as inspection follow-up actions (Appendix 5). The management and preservation actions are selected in accordance with criteria contained in the *Summary of Preservation Criteria* table (below) and adapted to CCRC’s specific bridge network.

Table 3: Summary of Preservation Criteria		
Preservation Action	Bridge Selection Criteria	Expected Service Life
<b>Replacement</b>		
Total Replacement	<ul style="list-style-type: none"> <li>NBI rating of 3 or less [1] [2]</li> <li>OR Cost of rehabilitation exceeds cost of replacement [1]</li> <li>OR Bridge is scour critical with no counter-measures available [1]</li> </ul>	70 years
<b>Rehabilitation</b>		
Superstructure Replacement	<ul style="list-style-type: none"> <li>NBI rating of 4 or less for the superstructure [1] [2]</li> <li>OR Cost of superstructure and deck rehabilitation exceeds cost of replacement [1]</li> </ul>	40 years <sup>[1]</sup>
Deck Replacement Epoxy Coated Steel Black Steel	<ul style="list-style-type: none"> <li>Use guidelines in MDOT’s Bridge Deck Preservation Matrix [3] [4]</li> <li>NBI rating of 4 or less for the deck surface and deck bottom [1] [2]</li> <li>Deck bottom has more than 25% total area with deficiencies [1]</li> <li>OR Replacement cost of deck is competitive with rehabilitation [1]</li> </ul>	60+ years <sup>[3][4]</sup>
Substructure Replacement (Full or Partial)	<ul style="list-style-type: none"> <li>NBI rating of 4 or less for abutments, piers, or pier cap [1] [2]</li> <li>Has open vertical cracks, signs of differential settlement, or active movement [1]</li> <li>Pontis rating of 3 or 5 for more than 30 percent of the substructure [1] [5]</li> <li>OR Bridge is scour critical with no counter-measures available</li> </ul>	40 years <sup>[1*]</sup>
Steel Beam Repair	<ul style="list-style-type: none"> <li>More than 25% section loss in an area of the beam that affects load carrying capacity [1]</li> </ul>	40 years <sup>[1*]</sup>

<b>Table 3: Summary of Preservation Criteria</b>		
<b>Preservation Action</b>	<b>Bridge Selection Criteria</b>	<b>Expected Service Life</b>
	<ul style="list-style-type: none"> <li>• <i>OR</i> To correct impact damage that impairs beam strength [1]</li> </ul>	
Prestressed Concrete Beam Repair	<ul style="list-style-type: none"> <li>• More than 5% spalling at ends of prestressed I-beams [1]</li> <li>• <i>OR</i> Impact damage that impairs beam strength or exposes prestressing strands [1]</li> </ul>	40 years <sup>[1]</sup>
Substructure Concrete Patching and Repair	<ul style="list-style-type: none"> <li>• NBI rating of 5 or 4 for abutments or piers, and surface has less than 30% area spalled and delaminated [1] [2]</li> <li>• <i>OR</i> Pontis rating of 3 or 4 for the column or pile extension, pier wall, and/or abutment wall and surface has between 2% and 30% area with deficiencies [1] [5]</li> <li>• <i>OR</i> In response to inspector's work recommendation for substructure patching [1]</li> </ul>	
Abutment Repair/Replacement	<ul style="list-style-type: none"> <li>• NBI rating of 4 or less for the abutment [1] [2]</li> <li>• <i>OR</i> Has open vertical cracks, signs of differential settlement, or active movement</li> </ul>	
Railing/Barrier Replacement	<ul style="list-style-type: none"> <li>• NBI rating greater than 5 for the deck [1] [2]</li> <li>• NBI rating less than 5 for the railing with more than 30% total area having deficiencies [1] [2]</li> <li>• <i>OR</i> Pontis rating is 4 for railing [1] [5]</li> <li>• <i>OR</i> Safety improvement is needed [1]</li> </ul>	
Culvert Repair/Replacement	<ul style="list-style-type: none"> <li>• NBI rating of 4 or less for culvert or drainage outlet structure</li> <li>• <i>OR</i> Has open vertical cracks, signs of deformation, movement, or differential settlement</li> </ul>	
<b>Preventive Maintenance</b>		
Shallow Concrete Deck Overlay	<ul style="list-style-type: none"> <li>• NBI rating is 5 or less for deck surface, and deck surface has more than 15% area with deficiencies [1] [2]</li> <li>• NBI rating of 4 or 5 for deck bottom, and deck bottom has between 5% and 30% area with deficiencies [1] [2]</li> <li>• <i>OR</i> In response to inspector's work recommendation [1]</li> </ul>	12 years
Deep Concrete Deck Overlay	<ul style="list-style-type: none"> <li>• NBI rating of 5 or less for deck surface, and deck surface has more than 15% area with deficiencies [1] [2]</li> <li>• NBI deck bottom rating is 5 or 6, and deck bottom has less than 10% area with deficiencies [1] [2]</li> <li>• <i>OR</i> In response to inspector's work recommendation [1]</li> </ul>	25 years
HMA Overlay with Waterproofing Membrane	<ul style="list-style-type: none"> <li>• NBI rating of 5 or less for deck surface, and both deck surface and bottom have between 15% and 30% area with deficiencies [1] [2]</li> <li>• <i>OR</i> Bridge is in poor condition and will be replaced in the near future and the most cost-effective fix is HMA overlay [1]</li> </ul>	
HMA Overlay Cap without Membrane	<ul style="list-style-type: none"> <li>• Note: All HMA caps should have membranes unless scheduled for replacement within five years.</li> <li>• NBI rating of 3 or less for deck surface and deck bottom, and deck surface and deck bottom have more than 30% area with deficiencies. Temporary holdover to improve ride quality for a bridge in the five-year plan for rehab/replacement. [1] [2]</li> </ul>	3 years
Concrete Deck Patching	<ul style="list-style-type: none"> <li>• NBI rating of 5, 6, or 7 for deck surface, and deck surface has between 2% and 5% area with delamination and spalling [1] [2]</li> <li>• <i>OR</i> In response to inspector's work recommendation [1]</li> </ul>	5 years

<b>Table 3: Summary of Preservation Criteria</b>		
<b>Preservation Action</b>	<b>Bridge Selection Criteria</b>	<b>Expected Service Life</b>
Steel Bearing Repair/Replacement	<ul style="list-style-type: none"> <li>NBI rating of 5 or more for superstructure and deck, and NBI rating 4 or less for bearing [2]</li> </ul>	
Deck Joint Replacement	<ul style="list-style-type: none"> <li>Always include when doing deep or shallow concrete overlays [1]</li> <li>NBI rating of 4 or less for joints [1] [2]</li> <li>OR Joint leaking heavily [1]</li> <li>OR In response to inspector's work recommendation for replacement [1]</li> </ul>	
Pin and Hanger Replacement	<ul style="list-style-type: none"> <li>NBI rating of 4 or less for superstructure for pins and hangers [1] [2]</li> <li>Pontis rating of 1, 2, or 3 for a frozen or deformed pin and hanger [1] [5]</li> <li>OR Presence of excessive section loss, severe pack rust, or out-of-plane distortion [1]</li> </ul>	15 years
Zone Repainting	<ul style="list-style-type: none"> <li>NBI rating of 5 or 4 for paint condition, and paint has 3% to 15% total area failing [1] [2]</li> <li>OR During routine maintenance on beam ends or pins and hangers [1]</li> <li>OR less than 15% of existing paint area has failed and remainder of paint system is in good or fair condition [1]</li> </ul>	10 years
Complete Repainting	<ul style="list-style-type: none"> <li>NBI rating of 3 or less for paint condition [1] [2]</li> <li>OR Painted steel beams that have greater than 15% of the existing paint area failing [1]</li> </ul>	
Partial Repainting	<ul style="list-style-type: none"> <li>See Zone or Spot Painting</li> </ul>	
Channel Improvements	<ul style="list-style-type: none"> <li>Removal of vegetation, debris, or sediment from channel and banks to improve channel flow</li> <li>OR in response to inspector's work recommendation</li> </ul>	
Scour Countermeasures	<ul style="list-style-type: none"> <li>Pontis scour rating of 2 or 3 and is not scheduled for replacement [1] [5]</li> <li>OR NBI comments in abutment and pier ratings indicate presence of scour holes [1] [2]</li> </ul>	
Approach Repaving	<ul style="list-style-type: none"> <li>Approach pavement relief joints should be included in all projects that contain a significant amount of concrete roadway (in excess of 1000' adjacent to the structure). The purpose is to alleviate the effects of pavement growth that may cause distress to the structure. Signs of pavement growth include: <ul style="list-style-type: none"> <li>Abutment spalling under bearings [1]</li> <li>Beam end contact [1]</li> <li>Closed expansion joints and/or pin and hangers [1]</li> <li>Damaged railing and deck fascia at joints [1]</li> <li>Cracking in deck at reference line (45 degree angle) [1]</li> </ul> </li> </ul>	
Guard Rail Repair/Replacement	<ul style="list-style-type: none"> <li>Guard rail missing or damaged<sup>[2*]</sup></li> <li>OR Safety improvement is needed<sup>[2*]</sup></li> </ul>	
<b>Scheduled Maintenance</b>		
Superstructure Washing	<ul style="list-style-type: none"> <li>When salt contaminated dirt and debris collected on superstructure is causing corrosion or deterioration by trapping moisture [1]</li> <li>OR Expansion or construction joints are to be replaced and the steel is not to be repainted [1]</li> </ul>	2 years

<b>Table 3: Summary of Preservation Criteria</b>		
<b>Preservation Action</b>	<b>Bridge Selection Criteria</b>	<b>Expected Service Life</b>
	<ul style="list-style-type: none"> <li>• OR Prior to a detailed replacement [1]</li> <li>• OR In response to inspector's work recommendation [1]</li> </ul>	
Drainage System Clean-Out/Repair	<ul style="list-style-type: none"> <li>• When drainage system is clogged with debris [1]</li> <li>• OR Drainage elements are broken, deteriorated, or damaged [1]</li> <li>• OR NBI rating comments for drainage system indicate need for cleaning or repair [1] [2]</li> </ul>	2 years
Spot Repainting	<ul style="list-style-type: none"> <li>• For zinc-based paint systems only. Do not spot paint with lead-based paints.</li> <li>• Less than 5% of paint area has failed in isolated areas [1]</li> <li>• OR In response to inspector's work recommendation [1]</li> </ul>	5 years
Slope Paving Repair	<ul style="list-style-type: none"> <li>• NBI rating is 5 or less for slope protection [1] [2]</li> <li>• OR Slope is degraded or sloughed</li> <li>• OR Slope paving has significant areas of distress, failure, or has settled [1]</li> </ul>	
Riprap Installation	<ul style="list-style-type: none"> <li>• To protect surface when erosion threatens the stability of side slopes of channel banks</li> </ul>	
Vegetation Control	<ul style="list-style-type: none"> <li>• When vegetation traps moisture on structural elements [1]</li> <li>• OR Vegetation is growing from joints or cracks [1]</li> <li>• OR In response to inspector's work recommendation for brush cut [1]</li> </ul>	1 year
Debris Removal	<ul style="list-style-type: none"> <li>• When vegetation, debris, or sediment accumulates on the structure or in the channel</li> <li>• OR In response to inspectors work recommendation</li> </ul>	1 year
Deck Joint Repair	<ul style="list-style-type: none"> <li>• Do not repair compression joint seals, assembly joint seals, steel armor expansions joints, and block out expansion joints; these should always be replaced. [1]</li> <li>• NBI rating is 5 for joint [1] [2]</li> <li>• OR In response to inspector's work recommendation for repair [1]</li> </ul>	
Concrete Sealing	<ul style="list-style-type: none"> <li>• Top surface of pier or abutments are below deck joints and, when contaminated with salt, salt can collect on the surface [1]</li> <li>• OR Surface of the concrete has heavy salt exposure. Horizontal surfaces of substructure elements are directly below expansion joints [1]</li> </ul>	
Concrete Crack Sealing	<ul style="list-style-type: none"> <li>• Concrete is in good or fair condition, and cracks extend to the depth of the steel reinforcement [1]</li> <li>• OR NBI rating of 5, 6, or 7 for deck surface, and deck surface has between 2% and 5% area with deficiencies [1] [2]</li> <li>• OR Unsealed cracks exist that are narrow and/or less than 1/8" wide and spaced more than 8' apart [1]</li> <li>• OR In response to inspector's work recommendation [1]</li> </ul>	5 years
Minor Concrete Patching	<ul style="list-style-type: none"> <li>• Repair minor delaminations and spalling that cover less than 30% of the concrete substructure [1]</li> <li>• OR NBI rating of 5 or 4 for abutments or piers, and comments indicate that their surface has less than 30% spalling or delamination [1] [2]</li> </ul>	

Table 3: Summary of Preservation Criteria		
Preservation Action	Bridge Selection Criteria	Expected Service Life
	<ul style="list-style-type: none"> <li>OR Pontis rating of 3 or 4 for the column or pile extension, pier wall and/or abutment wall, and surface has between 2% and 30% area with deficiencies [1] [5]</li> <li>OR In response to inspector's work recommendation [1]</li> </ul>	
HMA Surface Repair/Replacement	<ul style="list-style-type: none"> <li>HMA surface is in poor condition</li> <li>OR In response to inspector's work recommendation</li> </ul>	
Seal HMA Cracks/Joints	<ul style="list-style-type: none"> <li>HMA surface is in good or fair condition, and cracks extend to the surface of the underlying slab or sub course</li> <li>OR In response to inspector's work recommendation</li> </ul>	
Timber Repair	<ul style="list-style-type: none"> <li>NBI rating of 4 or less for substructure for timber members</li> <li>OR To repair extensive rot, checking, or insect infestation</li> </ul>	
Miscellaneous Repair	<ul style="list-style-type: none"> <li>Uncategorized repairs in response to inspector's work recommendation</li> </ul>	
<p>This table was produced by TransSystems and includes information from the following sources:</p> <p>[1] MDOT, <i>Project Scoping Manual</i>, MDOT, 2019.</p> <p>[2] MDOT, <i>MDOT NBI Rating Guidelines</i>, MDOT, 2017.</p> <p>[3] MDOT, <i>Bridge Deck Preservation Matrix - Decks with Uncoated "Black" Rebar</i>, MDOT, 2017.</p> <p>[4] MDOT, <i>Bridge Deck Preservation Matrix - Decks with Epoxy Coated Rebar</i>, 2017.</p> <p>[5] MDOT, <i>Pontis Bridge Inspection Manual</i>, MDOT, 2009.</p> <p>* From source with interpretation added.</p>		

In terms of management and preservation actions, CCRC’s asset management program uses a “mix of fixes” strategy that is made up of replacement, rehabilitation, preventive maintenance, and scheduled maintenance.

**Replacement** involves substantial changes to the existing structure, such as bridge deck replacement, superstructure replacement, or complete structure replacement, and is intended to improve critical or closed bridges to a good condition rating.

**Rehabilitation** is undertaken to extend the service life of existing bridges. The work will restore deficient bridges to a condition of structural or functional adequacy, and may include upgrading geometric features. Rehabilitation actions are intended to improve the poor or fair condition bridges to fair or good condition.

**Preventive maintenance** work will improve and extend the service life of fair bridges, and will be performed with the understanding that future rehabilitation or replacement projects will contain appropriate safety and geometric enhancements. Preventive maintenance projects are directed at limited bridge elements that are rated in fair condition with the intent of improving these elements to a good rating. Most preventive maintenance projects will be one-time actions in response to a condition state need. Routine preventive work will be performed by the agency’s in-house maintenance crews while larger, more complex work will be contracted.

CCRC's **scheduled maintenance** program is an integral part of the preservation plan, and is intended to extend the service life of fair and good structures by preserving the bridges in their current condition for a longer period of time. Scheduled maintenance is proactive and not necessarily condition driven. In-house maintenance crews will perform much of this work.

Certain of the severely degraded and structurally deficient bridges require replacement or major rehabilitation. Several of the remaining bridges require one-time preventive maintenance actions to repair defects and restore the structure to a higher condition rating. Most bridges are included in a scheduled maintenance plan with appropriate maintenance actions programmed for groups of bridges of similar material and type, bundled by location.

The replacement, rehabilitation, and preventive maintenance projects are generally eligible for funding under the local bridge program, and any requests for funding will be submitted with Crawford County Road Commission's annual applications.

To achieve its goals, a primary objective of CCRC's asset management program is improvement of one bridges rated poor (4 or lower) to a rating of fair (5) or higher within a three-year time period through management and/or preservation activities. The primary work activities that will be used to meet this improvement objective include replacement, rehabilitation, and preventive maintenance. The work has been prioritized by considering each individual bridge's needs, its importance, the present costs of improvements, and the impact of deferral (i.e., cost increase due to increased degradation). Additionally, CCRC's asset management program incorporates preservation of bridges currently rated fair (5) or higher in their current condition in order to extend their useful service life. The primary work activities used to meet this preservation objective include rehabilitation, preventive maintenance, and scheduled maintenance. A bridge-by-bridge preservation—or maintenance—plan is presented in the Appendix 4.

### ***Programmed/Funded Projects***

CCRC received \$ in total funding per year for the years 2026-2028. To achieve its goals, CCRC plans to spend \$ per year on preventive maintenance of bridges. CCRC plans to replace one bridges at a cost of \$1,800,000 . By performing the aforementioned preventive maintenance and replacement of bridge structures, CCRC may or may not meet its overall bridge network condition goals.

CCRC computes the estimated cost of each typical management and/or preservation action using unit prices in the latest *Bridge Repair Cost Estimate* spreadsheet contained in MDOT's *Local Bridge Program Call for Projects*. The cost of items of varying complexity, such as maintenance of traffic, staged construction, scour counter-measures, and so forth, are computed on a bridge-by-bridge basis. The cost estimates are reviewed and updated annually. A summary of the programmed/funded projects and investments can be found in Table 4, the Cost Projection table, below.

### ***Planned Projects***

CCRC identifies additional priority projects that remain unfunded. These are identified according to high, medium, and low priority in Table 4.

**Table 4: Cost Projection Table**

<b>Strategy</b>	<b>2025</b>	<b>2026</b>	<b>2027</b>	<b>2028</b>	<b>2029</b>	<b>GAP</b>
<b>New</b>						
Subtotal	\$0	\$0	\$0	\$0	\$0	\$0
<b>Replacement</b>						
2067				\$1,800,000		
Subtotal	\$0	\$0	\$0	\$1,800,000	\$0	\$0
<b>Rehabilitation</b>						
Subtotal	\$0	\$0	\$0	\$0	\$0	\$0
<b>Scheduled Maintenance</b>						
Subtotal	\$0	\$0	\$0	\$0	\$0	\$0
<b>Preventive Maintenance</b>						
Subtotal	\$0	\$0	\$0	\$0	\$0	\$0
<b>Other</b>						
Subtotal	\$0	\$0	\$0	\$0	\$0	\$0

## Gap Analysis

When CCRC compares its funding and its programmed/funded projects with all of its prioritized projects as shown in Table 4, CCRC believes it should be able to achieve some of its asset management goals for the period of this plan. For projects that it is unable to complete, CCRC will continue to monitor those bridge assets and take any necessary steps within its budget to prevent or mitigate a condition decline or a need to post or close the structure.

# 2. FINANCIAL RESOURCES

## **Anticipated Revenues**

CCRC applied for and/or has been granted MDOT local-aid funding. This funding was requested in the application year(s) 2025, for the purpose(s) of replacement, for the following bridge(s): 2067. This funding is intended for use in the year(s) 2028.

Any projects submitted to the local aid program that are not selected for funding will be added to the agency's program.

## **Anticipated Expenses**

Scheduled maintenance activities and minor repairs that are not affiliated with any applications, grants, or other funded projects will be performed by the agency's in-house maintenance forces and funded through the agency's annual operating budget.

# 3. RISK MANAGEMENT

CCRC recognizes that the potential risks associated with bridges generally fall into several categories:

- Personal injury and property damage resulting from a bridge collapse or partial failure;
- Loss of access to a region or individual properties resulting from bridge closures, restricted load postings, or extended outages for rehabilitation and repair activities; and
- Delays, congestion, and inconvenience due to serviceability issues, such as poor quality riding surface, loose expansion joints, or missing expansion joints.

CCRC addresses these risks by implementing regular bridge inspections and a preservation strategy consisting of preventive maintenance.

CCRC administers the biennial inspection of its bridges in accordance with NBIS and MDOT requirements. The inspection reports document the condition of CCRC’s bridges and evaluates them in order to identify new defects and monitor advancing deterioration. The summary inspection report in Appendix 1 identifies items needing follow-up, special inspection actions, and recommended bridge-by-bridge maintenance activities.

Bridges that are considered “scour critical” pose a risk to CCRC’s road and bridge network. Scour is the depletion of sediment from around the foundation elements of a bridge commonly caused by fast-moving water. According to MDOT’s *Michigan Structure Inventory and Appraisal Coding Guide*, a scour critical bridge is one that has unstable abutment(s) and/or pier(s) due to observed or potential (based on an evaluation study) scour. Bridges receiving a scour rating of 3 or less are considered scour critical. CCRC has scour critical bridges, which are listed in Table 5.

**Table 5: Bridges that are Considered Scour Critical**

<b>Scour Critical Bridges</b>
-----------------------------------

<b>Bridge Structure Number</b>	<b>Scour Critical Rating</b>
--------------------------------	------------------------------

CCRC has posted or closed bridges that are critical to accessing entire areas or individual properties within its jurisdiction. These bridges are listed in Table 6.

**Table 6: Posted or Close Bridges that are Critical Links**

<b>Posted/Closed Bridges that are Critical Links</b>		
<b>Bridge Structure Number</b>	<b>P/K</b>	<b>Comments</b>
2062	P	
2067	P	

The preservation strategy identifies actions in the operations and maintenance plan that are preventive or are responsive to specific bridge conditions. The actions are prioritized to correct critical structural safety and traffic issues first, and then to address other needs based on the operational importance of each bridge and the long-term preservation of the network. The inspection results serve as a basis for modifying and updating the operations and maintenance plan annually.

# Appendix 1

## ***Crawford County Road Commission 2024 Bridge Inspection Report Summary of Additional Inspection Recommendations***

STR 2060	N Down River Rd over E Br Au Sable River: Apply healer sealer to deck cracks.; Seal HMA-to-concrete joint both approaches.
STR 2061	N Down River Rd over N Br Au Sable River: Repave deck and replace waterproofing membrane.; Replace broken spacer blocks at SW approach.; Plug conduit holes through sheet pile at NE and NW quadrants to prevent loss of fill.; Seal cracks.; Plug conduit holes through sheet pile at NE and NW quadrants to prevent loss of fill.
STR 2063	County Rd 612 over Manistee River: Replace wearing surface and membrane.; Consider adding riprap at west abutment and NE, NW & SW wingwalls.; Seal cracks and replace HMA when bridge deck wearing surface is replaced.
STR 2064	County Rd 612 over Au Sable River: Clean dirt/debris from expansion joint gland at west sleeper slab.; Consider revising sidewalk concrete at approach railing post to comply with Standard Plan which will allow for flexibility in posts and to allow for future removal of damaged posts.; Remove 1" +/- of concrete sidewalk at end of bridge at NW & SW quadrant to allow for bridge expansion and contraction.; Consider revising sidewalk concrete at approach railing post to comply with Standard Plan which will allow for flexibility in posts and to allow for future removal of damaged posts.
STR 2065	County Rd 612 over N Br Au Sable River: Replace missing rail post at SE quad approach.; Remove and replace concrete pipe pile jackets. Remove and replace wales and tie rods.; Mortar P/T pockets in fascia box beams. Consider sloping shoulders away from roadway for better drainage. Plug hole in steel channel cap and add cold patch surface at SW quadrant.; Seal cracks in bridge wearing surface or replace HMA and membrane when approaches are paved.; Repave approaches.; Mortar P/T pockets in fascia box beams. Consider sloping shoulders away from roadway for better drainage. Plug hole in steel channel cap and add cold patch surface at SW quadrant.
STR 2066	County Rd 612 over Big Creek: Repair voids behind abutment planking. Provide fill and riprap to protect exposed bottom planks at both abutments.
STR 2067	Stephan Bridge Rd over Au Sable River: Replace HMA wearing surface and membrane. Or re-establish concrete deck as surface.; Patch multiple spalls on south abutment to prevent loss of backfill.; Repair erosion in approach slopes. Grade shoulders to drain away from road.; Remove downed tree at SW quad.; Repalce HMA approaches.
STR 2068	Chase Bridge Rd over S Br Au Sable River: Replace guardrail and posts on bridge and approaches.; Patch spalls/delaminations at west box beam.

- STR 2069 Wakeley Bridge Rd over Au Sable River: Appears underdrain outlet at NE quadrant doesn't have an ending with rodent screen. Verify if underdrain outlets at other quadrants have endings with rodent screens. Add outlet endings with rodent screens where missing.; Consider relocating dry hydrant away from pier to eliminate combined turbulence (perhaps locate at corner of south abutment and pipe into river).; Appears underdrain outlet at NE quadrant doesn't have an ending with rodent screen. Verify if underdrain outlets at other quadrants have endings with rodent screens. Add outlet endings with rodent screens where missing.
- STR 2070 McMasters Bridgerd over Au Sable River: Replace missing nuts and washers at approach rails and tighten nuts at loose spacer blocks. Replace missing nut & washer at NW quad terminal cable and tighten terminal cables at approach railing all quadrants.; Consider adding riprap at both abutments and all wingwalls. Fill erosion at NE and SE quadrant approaches.; Remove brush all quads.; Remove obstruction at outlet of drainage culvert at NE quad.; Seal cracks in HMA wearing surface; Seal cracks in HMA approaches.; Clean and patch spalls and delaminations on the fascia beams.; Remove obstruction at outlet of drainage culvert at NE quad.
- STR 2071 Lewiston Grade Rd over E Branch Au Sable River: Add spacer block and bolts at NE & SW quads where missing.; Replace missing riprap at both abutments.; Consider adding paving wedge to both approaches
- STR 2072 Pollak Bridge Road over Au Sable: Sweep/shovel bridge deck and clean scuppers.; Consider cleaning and painting steel stringers and bearing plates.; Consider adding fabric and riprap at base of both abutments and all wingwalls.; Sweep/shovel bridge deck and clean scuppers.
- STR 2073 Batterson Road over Au Sable River: Add post at NE quad approach railing. Add bolt at SE transition. Add spacer block at NE quadrant approach.; Cut brush at all quads.
- STR 2074 May Lake Road over Au Sable River: Seal cracks.; Cut brush all quads.; Repair riprap slopes at both abutments.; Seal cracks in HMA beyond wedges.
- STR 2075 Hulbert Road over Au Sable River: Replace broken approach railing posts at NE & NW quadrants. Repair end of approach railing at NE quad.; Cut brush at NE quadrant. Trim tree branches at west end of approach guardrail at load limit sign.; Grout below/behind north half of east abutment planks to fill any voids. Repair geotextile and riprap slopes along both abutments.
- STR 2076 Cameron Bridge Rd over Manistee River: Seal cracks.; Replace joint at center pier.; Replace cracked spacer blocks.; Cut brush at NW and SW quadrants.; Seal cracks and fill hole at SW reference line. Consider adding wedges at both approaches to reference lines.
- STR 2077 Wilcox Bridge Rd over East Branch Of Au Sable: Repair broken underdrain outlet ending at SE quadrant.; Remove dam under bridge and repair riprap scour protection.

STR 2078 Steckert Bridge Rd over South Branch Au Sable: Seal cracks in HMA wearing surface.; Add bolt at NW approach railing transition to bridge railing and replace broken block at NE transition to bridge.; Relocate large broken concrete "riprap" pieces at SE quad to allow better water flow.; Seal cracks in HMA surface.; Clean sand from scuppers.

STR 12747 Ole Dam Road over Ausable River: Seal cracks in HMA wearing surface.; Replace rail posts and blocks on bridge and approaches.; Seal cracks in approach HMA at both reference lines.

STR 13742 W Karen Lake Rd over E Br Ausable River: Replace post at NE quadrant terminal ending.

## **Appendix 2**

### ***Crawford County Road Commission 2024 Bridge Inspection Report Executive Summary***

#### ***General Recommendations***

- None at this time

# Appendix 3

Bridge Type	Structure Number	Bridge ID	Facility carried	Fairface intersected	Priority of Secondary Route	Structure Type Main Span (Material)	Structure Type Abut/Spans (Material)	Number of Main Span (Item 4)	Total Str Length (Item 4)	Year Built (Item 2)	Year Rebuilt (Item 3)	ADP	Year of ADP	Inspection Date	Inspection Findings										Specialist					
															Overall Status (Item 4)	Deck Rating (Item 5)	Deck Bottom Rating (Item 6)	Skew Rating (Item 7)	Substr Rating (Item 8)	Channel Rating (Item 9)	Culvert Rating (Item 10)	Surface Rating (Item 11)	Rain/Fog (Item 12)	Drainage Rating (Item 13)	Other Items (Item 14)	Structure Evaluation	Structural Defects	Structural Rating	Section Loss	Score Overall (Item 15)
Precast concrete - box beam/girder - multi R/L	2000	20200000000030	N DOWN RIVER RD	I BR AN SABLE RIVER	Primary	3	3	1	90	2016		2007	2015	10/11/2024	A	6	N	5	6	7	N	7	N	7	7	6		87.6	3	5
Precast concrete - box beam/girder - multi R/L	2001	20200000000030	N DOWN RIVER RD	N BR AN SABLE RIVER	Primary	3	3	1	48.9	1984		207	1985	10/22/2024	A	7	N	7	5	7	N	5	N	N	N	1		83.0	N	5
Steel - Warren truss	2002	20200000000030	N DOWN RIVER RD	AS CLIFF	Primary	3	2	1	42.9	1949		251	1950	10/09/2024	F	2	6	2	6	7	N	5	4	N	N	1		72.4	N	5
Precast concrete - box beam/girder - multi R/L	2003	20200007000030	COUNTY RD 612	MANHATTAN RIVER	Primary	5	5	1	94	1920	1960	250	1965	10/17/2024	A	6	N	6	5	7	N	5	N	5	1		82.4	N	5	
Precast concrete - box beam/girder - single R/L	2004	20200007000030	COUNTY RD 612	AS SABLE RIVER	Primary	5	5	1	89	2023		113	2023	10/17/2024	A	5	9	5	5	8	N	5	9	5	0		99.0	N	5	
Precast concrete - box beam/girder - multi R/L	2005	20200007000030	COUNTY RD 612	N BR AN SABLE RIVER	Primary	5	5	1	42.9	1944		459	1945	10/09/2024	A	6	N	6	6	7	N	6	N	N	1		86.1	N	5	
Steel - I-beam	2006	20200007000040	COUNTY RD 612	AS CLIFF	Primary	7	7	1	12	1934	2002	711	2011	10/17/2024	A	2	3	3	2	6	N	2	N	N	1	Struct Def	86.1	N	5	
Steel - Warren truss	2007	20200030000030	STEVENS BRIDGE RD	AS SABLE RIVER	Primary	1	2	2	69	1900	1960	360	2015	10/22/2024	F	7	7	3	6	6	N	4	4	N	N	1		51.5	2	5
Precast concrete - box beam/girder - multi R/L	2008	20200170000030	CROSS BRIDGE RD	I BR AN SABLE RIVER	Primary	5	5	1	61	1966		166	1965	10/22/2024	A	6	N	5	7	6	N	7	N	N	1		80.1	2	5	
Precast concrete - box beam/girder - single R/L	2009	20200180000030	WALLEY BRIDGE RD	AS SABLE RIVER	Primary	5	5	1	150	2022		648	2018	10/22/2024	A	5	5	5	5	7	N	5	N	5	0		89.7	2	5	
Precast concrete - box beam/girder - multi R/L	2020	20200021000030	WICKWATER BRIDGE RD	AS SABLE RIVER	Primary	5	5	1	91.5	1990		139	1990	10/22/2024	A	5	N	5	6	7	N	5	N	N	1		87.6	2	5	
Steel - I-beam	2021	20201400000030	HEWITSON BRIDGE RD	I BR ANCH AS SABLE RIVER	Secondary	7	7	1	11	1960	2000	15	1970	10/17/2024	A	6	6	6	6	6	N	6	N	N	0		86.2	N	5	
Steel - Warren truss	2022	20202400000030	POLLY BRIDGE ROAD	AS SABLE	Secondary	3	7	1	318	1977		50	1977	10/11/2024	A	6	6	5	7	7	N	6	2	N	N	1		72.4	2	5
Steel - I-beam	2023	20202400000030	BATTYBORN ROAD	AS SABLE RIVER	Secondary	7	7	1	46	1973		110	1971	10/17/2024	A	7	7	7	7	8	N	7	N	5	N	0		100	N	5
Steel - I-beam	2024	20202500000030	WOLF LAKE ROAD	AS SABLE RIVER	Secondary	7	7	1	54.9	1958		200	1955	10/17/2024	A	6	6	6	7	6	N	5	N	N	0		100	N	5	
Steel - I-beam	2025	20201800000030	WALLEY BRIDGE	AS SABLE RIVER	Secondary	7	7	1	22.5	1983		251	1983	10/17/2024	A	6	6	6	7	6	N	6	N	N	1		100	N	5	
Steel - I-beam	2026	20203000000030	CAMP BRON BRIDGE RD	MANHATTAN RIVER	Secondary	7	7	1	87.8	1931		200	1932	10/17/2024	A	7	7	5	6	7	N	6	7	5	0		88.1	N	5	
Steel - I-beam	2027	20203000000030	WILSON BRIDGE RD	BATTYBORN AS SABLE	Secondary	7	7	1	25	2004		250	2000	10/11/2024	A	6	6	6	6	7	N	6	N	N	0		82.5	N	5	
Steel - I-beam	2028	20204000000030	SPECTER BRIDGE RD	SOUTH BRANCH AS SABLE	Secondary	7	7	1	35.8	1979		180	1981	10/21/2024	A	7	7	6	6	7	N	5	N	N	1		88.2	N	5	
Steel - Channel	12741	20202400000030	GILL DAM ROAD	AS SABLE RIVER	Secondary	7	8	1	22.9	1977		300	1977	10/21/2024	A	6	7	7	6	7	N	5	N	N	1		86	N	5	
Steel - I-beam	12742	20202400000030	W CAREY LAKE RD	I BR AN SABLE RIVER	Secondary	7	7	1	32	2026		50	2023	10/21/2024	A	6	6	6	6	7	N	7	N	N	1		86	N	5	





# C. CULVERT ASSET MANAGEMENT PLAN SUPPLEMENT

## Culvert Primer

Culverts are structures that lie underneath roads, enabling water to flow from one side of the roadway to the other (Figure C-1 and Figure C-2). The important distinguishing factor between a culvert and a bridge is the size. Culverts are considered anything under 20 feet while bridges, according to the Federal Highway Administration, are 20 feet or more. While similar in function to storm sewers, culverts differ from storm sewers in that culverts are open on both ends, are constructed as straight-line conduits, and lack intermediate drainage structures like manholes and catch basins. Culverts are critical to the service life of a road because of the important role they play in keeping the pavement layers well drained and free from the forces of water building up on one side of the roadway.

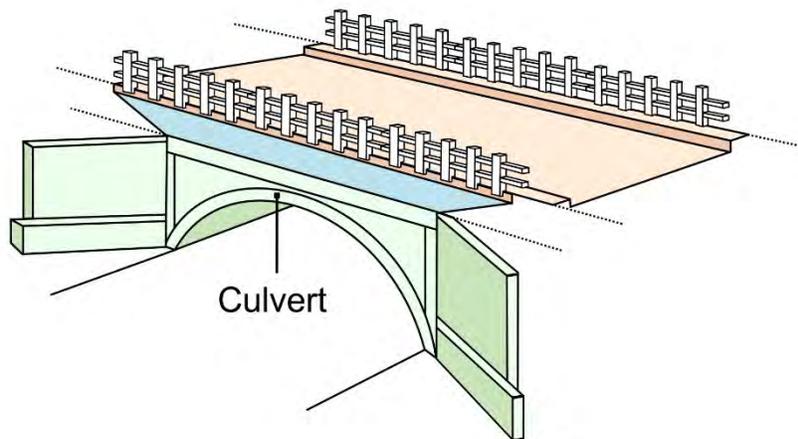


Figure C-1: Diagram of a culvert structure



Figure C-2: Examples of culverts. Culverts allow water to pass under the roadway (left), they are straight-line conduits with no intermediate drainage structures (middle), and they come in various materials (left: metal; middle and right: concrete) and shapes (left: arch; middle: round; right: box).

## ***Culvert Types***

Michigan conducted its first pilot data collection on local agency culverts in the state in 2018. Of almost 50,000 culverts inventoried as part of the state-wide pilot project, the material type used for constructing culverts ranged from (in order of predominance) corrugated steel, concrete, plastic, aluminum, and masonry/tile, to timber materials. The shapes of the culverts were (in order of predominance) circular, pipe arch, arch, rectangular, horizontal ellipse, or box. The diameter for the majority of culverts ranged from less than 12 inches to 24 inches; a portion, however, ranged from 30 inches to more than 48 inches.

## ***Culvert Condition***

Several culvert condition assessment practices exist. The FHWA has an evaluation method in its 1986 *Culvert Inspection Manual*. In conjunction with descriptions and details in the Ohio Department of Transportation's 2017 *Culvert Inspection Manual* and Wisconsin DOT's *Bridge Inspection Field Manual*, the FHWA method served as the method for evaluating Michigan culverts in the pilot. In 2018, Michigan local agencies participated in a culvert pilot data collection, gathering inventory and condition data; full detail on the condition assessment system used in the data collection can be found in Appendix G of the final report ([https://www.michigan.gov/documents/tamc/TAMC\\_2018\\_Culvert\\_Pilot\\_Report\\_Complete\\_634795\\_7.pdf](https://www.michigan.gov/documents/tamc/TAMC_2018_Culvert_Pilot_Report_Complete_634795_7.pdf)).

The Michigan culvert pilot data collection used a 1 through 10 rating system, where 10 is considered a new culvert with no deterioration or distress and 1 is considered total failure. Each of the different culvert material types requires the assessment of features unique to that material type, including structural deterioration, invert deterioration, section deformation, blockage(s) and scour. Corrugated metal pipe, concrete pipe, plastic pipe, and masonry culverts require an additional assessment of joints and seams. Slab abutment culverts require an additional assessment of the concrete abutment and the masonry abutment. Assessment of timber culverts only relied on blockage(s) and scour. The assessments come together to generate condition rating categories of good (rated as 10, 9, or 8), fair (rated as 7 or 6), poor (rated as 5 or 4), or failed (rated as 3, 2, or 1).

## ***Culvert Treatments***

The *MDOT Drainage Manual* addresses culvert design and treatments. Of most importance to the longevity of culverts is regular cleaning to prevent clogs. More extensive treatments may include re-positioning the pipe to improve its grade and lining a culvert to achieve more service life after structural deterioration has begun.

# D. TRAFFIC SIGNALS ASSET MANAGEMENT PLAN SUPPLEMENT

## Traffic Signals Primer

### *Types*

Electronic traffic control devices come in a large array of configurations, which include case signs (e.g., keep right/left, no right/left turn, reversible lanes), controllers, detection (e.g., cameras, push buttons), flashing beacons, interconnects (e.g., DSL, fire station, phone line, radio), pedestrian heads (e.g., hand-man), and traffic signals. This asset management plan is only concerned with traffic signals (Figure D-1) as a functioning unit and does not consider other electronic traffic control devices.



Figure D-1: Example of traffic signals

### *Condition*

Traffic signal assessment considers the functioning of basic tests on a pass/fail basis. These tests include battery backup testing, components testing, conflict monitor testing, radio testing, and underground detection.

### *Treatments*

Traffic signals are maintained in accordance with the *Michigan Manual on Uniform Traffic Control Devices*. Maintenance of traffic signals includes regular maintenance of all components, cleaning and servicing to prevent undue failures, immediate maintenance in the case of emergency calls, and provision of stand-by equipment. Timing changes are restricted to authorized personnel only.

## E. GLOSSARY & ACRONYMS

### Glossary

**Alligator cracking:** Cracking of the surface layer of an asphalt pavement that creates a pattern of interconnected cracks resembling alligator hide. This is often due to overloading a pavement, sub-base failure, or poor drainage.<sup>5</sup>

**Asset management:** A process that uses data to manage and track road assets in a cost-effective manner using a combination of engineering and business principles. Public Act 325 of 2018 provides a legal definition: “an ongoing process of maintaining, preserving, upgrading, and operating physical assets cost effectively, based on a continuous physical inventory and condition assessment and investment to achieve established performance goals”.<sup>6</sup>

**Biennial inspection:** Inspection of an agency’s bridges every other year, which happens in accordance with National Bridge Inspection Standards and Michigan Department of Transportation requirements.

**Bridge inspection program:** A program implemented by a local agency to inspect the bridges within its jurisdiction systematically in order to ensure proper functioning and structural soundness.

**Capital preventative maintenance:** Also known as CPM, a planned set of cost-effective treatments to address of fair-rated infrastructure before the structural integrity of the system has been severely impacted. These treatments aim to slow deterioration and to maintain or improve the functional condition of the system without significantly increasing the structural capacity. Light capital preventive maintenance is a set of treatments designed to seal isolated areas of the pavement from water, such as crack and joint sealing, to protect and restore pavement surface from oxidation with limited surface thickness material, such as fog seal; generally, application of a light CPM treatment does not provide a corresponding increase in a segment’s PASER score. Heavy capital preventive maintenance is a set of surface treatments designed to protect pavement from water intrusion or environmental weathering without adding significant structural strength, such as slurry seal, chip seal, or thin (less than 1.5-inch) overlays for bituminous surfaces or patching or partial-depth (less than 1/3 of pavement depth) repair for concrete surfaces.

**Chip seal:** An asphalt pavement treatment method consisting of, first, spraying liquid asphalt onto the old pavement surface and, then, a single layer of small stone chips spread onto the wet asphalt layer.

**City major:** A road classification, defined in Michigan Public Act 51, that encompasses the generally more important roads in a city or village. City major roads are designated by a municipality’s governing body and are subject to approval by the State Transportation Commission. These roads do not include roads under the jurisdiction of a county road commission or trunkline highways.

**City minor:** A road classification, defined in Michigan Public Act 51, that encompasses the generally less important roads in a city or village. These roads include all city or village roads that are not city major road and do not include roads under the jurisdiction of a county road commission.

---

<sup>5</sup> [https://en.wikipedia.org/wiki/Crocodile\\_cracking](https://en.wikipedia.org/wiki/Crocodile_cracking)

<sup>6</sup> Inventory-based Rating System for Gravel Roads: Training Manual

**Composite pavement:** A pavement consisting of concrete and asphalt layers. Typically, composite pavements are old concrete pavements that were overlaid with HMA in order to gain more service life.

**Concrete joint resealing:** Resealing the joints of a concrete pavement with a flexible sealant to prevent moisture and debris from entering the joints. When debris becomes lodged inside a joint, it inhibits proper movement of the pavement and leads to joint deterioration and spalling.

**Concrete pavement:** Also known as rigid pavement, a pavement made from portland cement concrete. Concrete pavement has an average service life of 30 years and typically does not require as much periodic maintenance as HMA.

**Cost per lane mile:** Associated cost of construction, measured on a per lane, per mile basis. Also see *lane-mile segment*.

**County local:** A road classification, defined in Michigan Public Act 51, that encompasses the generally less important and low-traffic roads in a county. This includes all county roads that are not classified as county primary roads.

**County primary:** A road classification, defined in Michigan Public Act 51, that encompasses the generally more important and high-traffic roads in a county. County primary roads are designated by board members of the county road commissions and are subject to approval by the State Transportation Commission.

**CPM:** See *Capital preventive maintenance*.

**Crack and seat:** A concrete pavement treatment method that involves breaking old concrete pavement into small chunks and leaving the broken pavement in place to provide a base for a new surface. This provides a new wear surface that resists water infiltration and helps prevent damaged concrete from reflecting up to the new surface.

**Crack seal:** A pavement treatment method for both asphalt and concrete pavements that fills cracks with asphalt materials, which seals out water and debris and slows down the deterioration of the pavement. Crack seal may encompass the term “crack filling”.

**Crush and shape:** An asphalt pavement treatment method that involves pulverizing the existing asphalt pavement and base and then reshaping the road surface to correct imperfections in the road’s profile. Often, a layer of gravel is added along with a new wearing surface such as an HMA overlay or chip seal.

**Crust:** A very tightly compacted surface on an unpaved road that sheds water with ease but takes time to be created.

**Culvert:** A pipe or structure used under a roadway that allows cross-road drainage while allowing traffic to pass without being impeded; culverts span up to 20 feet.<sup>7</sup>

**Dowel bar retrofit repair:** A concrete pavement treatment method that involves cutting slots in a cracked concrete slab, inserting steel bars into the slots, and placing concrete to cover the new bars and fill the slots. It aims to reinforce cracks in a concrete pavement.

---

<sup>7</sup> Adapted from Inventory-based Rating System for Gravel Roads: Training Manual

**Dust control:** A gravel road surface treatment method that involves spraying chloride or other chemicals on the gravel surface to reduce dust loss, aggregate loss, and maintenance. This is a relatively short-term fix that helps create a crusted surface.

**Expansion joint:** Joints in a bridge that allow for slight expansion and contraction changes in response to temperature. Expansion joints prevent the build up of excessive pressure, which can cause structural damage to the bridge.

**Federal Highway Administration:** Also known as FHWA, this is an agency within the U.S. Department of Transportation that supports state and local governments in the design, construction, and maintenance of the nation's highway system.<sup>8</sup>

**Federal-aid network:** Portion of road network that is comprised of federal-aid routes. According to Title 23 of the United States Code, federal-aid-eligible roads are "highways on the federal-aid highways systems and all other public roads not classified as local roads or rural minor collectors".<sup>9</sup> Roads that are part of the federal-aid network are eligible for federal gas-tax monies.

**FHWA:** See *Federal Highway Administration*.

**Flexible pavement:** See *hot-mix asphalt pavement*.

**Fog seal:** An asphalt pavement treatment method that involves spraying a liquid asphalt coating onto the entire pavement surface to fill hairline cracks and prevent damage from sunlight and oxidation. This method works best for good to very good pavements.

**Full-depth concrete repair:** A concrete pavement treatment method that involves removing sections of damaged concrete pavement and replacing it with new concrete of the same dimensions in order to restore the riding surface, delay water infiltration, restore load transfer from one slab to the next, and eliminate the need to perform costly temporary patching.

**Geographic divides:** Areas where a geographic feature (e.g., river, lake, mountain) limits crossing points of the feature.

**Grants:** Competitive funding gained through an application process and targeted at a specific project type to accomplish a specific purpose. Grants can be provided both on the federal and state level and often make up part of the funds that a transportation agency receives.

**Gravel surfacing:** A low-cost, easy-to-maintain road surface made from aggregate and fines.

**Heavy capital preventive maintenance:** See *Capital preventive maintenance*.

**HMA:** See *hot-mix asphalt pavement*.

**Hot-mix asphalt overlay:** Also known as HMA overlay, this a surface treatment that involves layering new asphalt over an existing pavement, either asphalt or concrete. It creates a new wearing surface for traffic and to seal the pavement from water, debris, and sunlight damage, and it often adds significant structural strength.

**Hot-mix asphalt pavement:** Also known as HMA pavement, this type of asphalt creates a flexible pavement composed of aggregates, asphalt binder, and air voids. HMA is heated for placement and

---

<sup>8</sup> Federal Highway Administration webpage <https://www.fhwa.dot.gov/>

<sup>9</sup> Inventory-based Rating System for Gravel Roads: Training Manual

compaction at high temperatures. HMA is less expensive to construct than concrete pavement, however it requires frequent maintenance activities and generally lasts 18 years before major rehabilitation is necessary. HMA makes up the vast majority of local-agency-owned pavements.

**IBR:** See *IBR element*, *IBR number*, and/or *Inventory-based Rating System*<sup>TM</sup>.

**IBR element:** A feature used in the IBR System<sup>TM</sup> for assessing the condition of roads. The system relies on assessing three elements: surface width, drainage adequacy, and structural adequacy.<sup>10</sup>

**IBR number:** The 1-10 rating determined from assessments of the weighted IBR elements. The weighting relates each element to the intensity road work needed to improve or enhance the IBR element category.<sup>11</sup>

**Interstate highway system:** The road system owned and operated by each state consisting of routes that cross between states, make travel easier and faster. The interstate roads are denoted by the prefix “I” or “U.S.” and then a number, where odd routes run north-south and even routes run east-west. Examples are I-75 or U.S. 2.<sup>12</sup>

**Inventory-based Rating System**<sup>TM</sup>: Also known as the IBR System<sup>TM</sup>, a rating system designed to assess the capabilities of gravel and unpaved roads to support intended traffic volumes and types year round. It assesses roads based on how three IBR elements, or features—surface width, drainage adequacy, and structural adequacy—compare to a baseline, or “good”, road.<sup>13</sup>

**Investment Reporting Tool:** Also known as IRT, a web-based system used to manage the process for submitting required items to the Michigan Transportation Asset Management Council. Required items include planned and completed maintenance and construction activity for roads and bridges and comprehensive asset management plans.

**IRT:** See *Investment Reporting Tool*.

**Jurisdiction:** Administrative power of an entity to make decisions for something. In Michigan, the three levels of jurisdiction classification for transportation assets are state highways, county roads, and city and village streets. State highways are under the jurisdiction of the Michigan Department of Transportation, county roads are under the jurisdiction of the road commission for the county in which the roads are located, and city and village streets are under the jurisdiction of the municipality in which the roads are located.

**Jurisdictional borders:** Borders between two road-owning-agency jurisdictions, or where the roads owned by one agency turn into roads owned by another agency. Examples of jurisdictional borders are township or county lines.

**Lane-mile segment:** A segment of road that is measured by multiplying the centerline miles of a roadway by the number of lanes present.

**Lane-mile-years:** A network’s total lane-miles multiplied by one year; a method to quantify the measurable loss of pavement life.

---

<sup>10</sup> Inventory-based Rating System for Gravel Roads: Training Manual

<sup>11</sup> Inventory-based Rating System for Gravel Roads: Training Manual

<sup>12</sup> <https://www.fhwa.dot.gov/interstate/faq.cfm#question3>

<sup>13</sup> Adapted from Inventory-based Rating System for Gravel Roads: Training Manual

**Light capital preventive maintenance:** See *Capital preventive maintenance*.

**Limited access areas:** Areas—typically remote areas—serviced by few or seasonal roads that require long detours routes if servicing roads are closed.

**Main access to key commercial districts:** Areas where large number or large size business will be significantly impacted if a road is unavailable.

**Maintenance grading:** A surface treatment method for unpaved roads that involves re-grading the road to remove isolated potholes, washboarding, and ruts, and then restoring the compacted crust layer.

**MDOT:** See *Michigan Department of Transportation*.

**MDOT's Local Bridge Program Call for Projects:** A call for project proposals for replacement, rehabilitation, and/or preventive maintenance of local bridges that, if granted, receives bridge funding from the Michigan Department of Transportation. The Call for Projects is made by the Local Bridge Program.

**MGF:** See *Michigan Geographic Framework*.

**Michigan Department of Transportation:** Also known as MDOT, this is the state of Michigan's department of transportation, which oversees roads and bridges owned by the state or federal government in Michigan.

**Michigan Geographic Framework:** Also known as MGF, this is the state of Michigan's official digital base map that contains location and road information necessary to conduct state business. The Michigan Department of Transportation uses the MGF to link transportation assets to a physical location.

**Michigan Public Act 51 of 1951:** Also known as PA 51, this is a Michigan legislative act that served as the foundation for establishing a road funding structure by creating transportation funding distribution methods and means. It has been amended many times.<sup>14</sup>

**Michigan Public Act 325 of 2018:** Also known as PA 325, this legislation modified PA 51 of 1951 in regards to asset management in Michigan, specifically 1) re-designating the TAMC under Michigan Infrastructure Council (MIC); 2) promoting and overseeing the implementation of recommendations from the regional infrastructure asset management pilot program; 3) requiring local road three-year asset management plans beginning October 1, 2020; 4) adding asset classes that impact system performance, safety or risk management, including culverts and signals; 5) allowing MDOT to withhold funds if no asset management plan submitted; and 6) prohibiting shifting finds from a country primary to a county local, or from a city major to a city minor if no progress toward achieving the condition goals described in its asset plan.<sup>15</sup>

**Michigan Public Act 499 of 2002:** Also known as PA 499, this legislation requires road projects for the upcoming three years to be reported to the TAMC.

**Michigan Transportation Asset Management Council:** Also known as the TAMC, a council comprised of professionals from county road commissions, cities, a county commissioner, a township official, regional and metropolitan planning organizations, and state transportation department personnel. The

---

<sup>14</sup> Inventory-based Rating System for Gravel Roads: Training Manual

<sup>15</sup> Inventory-based Rating System for Gravel Roads: Training Manual

council reports directly to the Michigan Infrastructure Council.<sup>16</sup> The TAMC provides resources and support to Michigan’s road-owning agencies, and serves as a liaison in data collection requirements between agencies and the state.

**Michigan Transportation Fund:** Also known as MTF, this is a source of transportation funding supported by vehicle registration fees and the state’s per-gallon gas tax.

**Microsurface treatment:** An asphalt pavement treatment method that involves applying modified liquid asphalt, small stones, water, and portland cement for the purpose of protecting a pavement from damage caused by water and sunlight.

**Mill and hot-mix asphalt overlay:** Also known as a mill and HMA overlay, this is a surface treatment that involves the removal of the top layer of pavement by milling and the replacement of the removed layer with a new HMA layer.

**Mix-of-fixes:** A strategy of maintaining roads and bridges that includes generally prioritizes the spending of money on routine maintenance and capital preventive maintenance treatments to impede deterioration and then, as money is available, performing reconstruction and rehabilitation.

**MTF:** See *Michigan Transportation Fund*.

**National Bridge Inspection Standards:** Also known as NBIS, standards created by the Federal Highway Administration to locate and evaluate existing bridge deficiencies in the federal-aid highway system to ensure the safety of the traveling public. The standards define the proper safety for inspection and evaluation of all highway bridges.<sup>17</sup>

**National Center for Pavement Preservation:** Also known as the NCPP, a center that offers education, research, and outreach in current and innovative pavement preservation practices. This collaborative effort of government, industry, and academia entities was established at Michigan State University.

**National Functional Class:** Also known as NFC, a federal grouping system for public roads that classifies roads according to the type of service that the road is intended to provide.

**National highway system:** Also known as NHS, this is a network of roads that includes the interstate highway system and other major roads managed by state and local agencies that serve major airports, marine, rail, pipelines, truck terminals, railway stations, military bases, and other strategic facilities.

**NBIS:** See *National Bridge Inspection Standards*.

**NCPP:** See *National Center for Pavement Preservation*.

**NCPP Quick Check:** A system created by the National Center for Pavement Preservation that works under the premise that a one-mile road segment loses one year of life each year that it is not treated with a maintenance, rehabilitation, or reconstruction project.

**NFC:** See *National Functional Class*.

**Non-trunkline:** A local road intended to be used over short distances but not recommended for long-distance travel.

---

<sup>16</sup> Inventory-based Rating System for Gravel Roads: Training Manual

<sup>17</sup> <https://www.fhwa.dot.gov/bridge/nbis/>

**Other funds:** Expenditures for equipment, capital outlay, debt principal payment, interest expense, contributions to adjacent governmental units, principal, interest and bank fees, and miscellaneous for cities and villages.

**PA:** See *Michigan Public Act 51*, *Michigan Public Act 325*, and/or *Michigan Public Act 499*.

**Partial-depth concrete repair:** A concrete pavement treatment method that involves removing spalled or delaminated areas of concrete pavement, usually near joints and cracks, and replacing with new concrete. This is done to provide a new wearing surface in isolated areas, to slow down water infiltration, and to help delay further freeze-thaw damage.

**PASER:** See *Pavement Surface Evaluation and Rating system*.

**Pavement reconstruction:** A complete removal of the old pavement and base and construction of an entirely new road. This is the most expensive rehabilitation of the roadway and also the most disruptive to traffic patterns.

**Pavement Surface Evaluation and Rating system:** Also known as the PASER system, the PASER system rates surface condition on a 1-10 scale, where 10 is a brand new road with no defects, 5 is a road with distress but that is structurally sound and requires only preventative maintenance, and 1 is a road with extensive surface and structural distresses that is in need of total reconstruction. This system provides a simple, efficient, and consistent method for evaluating the condition of paved roads.<sup>18</sup>

**Pothole:** A defect in a road that produces a localized depression.<sup>19</sup>

**Preventive maintenance:** Planned treatments to an existing asset to prevent deterioration and maintain functional condition. This can be a more effective use of funds than the costly alternative of major rehabilitation or replacement.

**Proactive preventive maintenance:** Also known as PPM, a method of performing capital preventive maintenance treatments very early in a pavement's life, often before it exhibits signs of pavement defect.

**Public Act 51:** See *Michigan Public Act 51 of 1951*

**Public Act 325:** See *Michigan Public Act 325 of 2018*

**Public Act 499:** See *Michigan Public Act 499 of 2002*

**Reconstruction and rehabilitation programs:** Programs intended to reconstruct and rehabilitate a road.

**Restricted load postings:** A restriction enacted on a bridge structure when is incapable of transporting a state's legal vehicle loads.

**Rights-of-way ownership:** The owning of the right-of-way, which is the land over which a road or bridge travels. In order to build a road, road agencies must own the right-of-way or get permission to build on it.

**Rigid pavement:** See *concrete pavement*.

---

<sup>18</sup> Adapted from Inventory-based Rating System for Gravel Roads: Training Manual

<sup>19</sup> Inventory-based Rating System for Gravel Roads: Training Manual

**Road infrastructure:** An agency's road network and assets necessary to make it function, such as traffic signage and ditches.

**Road:** The area consisting of the roadway (i.e., the travelled way or the portion of the road on which vehicles are intended to drive), shoulders, ditches, and areas of the right of way containing signage.<sup>20</sup>

**Roadsoft:** An asset management software suit that enables agencies to manage road and bridge related infrastructure. The software provides tools for collecting, storing, and analyzing data associated with transportation infrastructure. Built on an optimum combination of database engine and GIS mapping tools, Roadsoft provides a quick, smooth user experience and almost unlimited data handling capabilities.<sup>21</sup>

**Ruts/rutting:** Deformation of a road that usually forms as a permanent depression concentrated under the wheel path parallel to the direction of travel.<sup>22</sup>

**Scheduled maintenance:** Low-cost, day-to-day activities applied to bridges on a scheduled basis that mitigates deterioration.<sup>23</sup>

**Sealcoat pavement:** A gravel road that has been sealed with a thin asphalt binder coating that has stone chips spread on top.

**Service life:** Time from when a road or treatment is first constructed to when it reaches a point where the distresses present change from age-related to structural-related (also known as the critical distress point).<sup>24</sup>

**Slurry seal:** An asphalt pavement treatment method that involves applying liquid asphalt, small stones, water, and portland cement in a very thin layer with the purpose of protecting an existing pavement from being damaged by water and sunlight.

**Structural improvement:** Pavement treatment that adds strength to the pavement. Roads requiring structural improvement exhibit alligator cracking and rutting and are considered poor by the TAMC definitions for condition.

**Subsurface infrastructure:** Infrastructure maintained by local agencies that reside underground, for example, drinking water distribution systems, wastewater collection systems, and storm sewer systems.

**TAMC:** See *Michigan Transportation Asset Management Council*.

**TAMC pavement condition dashboard:** Website for viewing graphs of pavement and bridge conditions, traffic and miles travelled, safety statistics, maintenance activities, and financial data for Michigan's cities and villages, counties, and regions, as well as the state of Michigan.

**TAMC's good/fair/poor condition classes:** Classification of road conditions defined by the Michigan Transportation Asset Management Council based on bin ranges of PASER scores and similarities in defects and treatment options. Good roads have PASER scores of 8, 9, or 10, have very few defects, and require minimal maintenance. Fair roads have PASER scores of 5, 6, or 7, have good structural support but a deteriorating surface, and can be maintained with CPM treatments. Poor roads have PASER scores

---

<sup>20</sup> Inventory-based Rating System for Gravel Roads: Training Manual

<sup>21</sup> Inventory-based Rating System for Gravel Roads: Training Manual

<sup>22</sup> Paving Class Glossary

<sup>23</sup> Inventory-based Rating System for Gravel Roads: Training Manual

<sup>24</sup> Inventory-based Rating System for Gravel Roads: Training Manual

of 1, 2, 3, or 4, exhibit evidence that the underlying structure is failing, such as alligator cracking and rutting. These roads must be rehabilitated with treatments like heavy overlay, crush and shape, or total reconstruction.

**Tax millages:** Local tax implemented to supplement an agency’s budget, such as road funding.

**Thin hot-mix asphalt overlay:** Application of a thin layer of hot-mix asphalt on an existing road to re-seal the road and protect it from damage caused by water. This also improves the ride quality and provides a smoother, uniform appearance that improves visibility of pavement markings.<sup>25</sup>

**Transportation infrastructure:** All of the elements that work together to make the surface transportation system function including roads, bridges, culverts, traffic signals, and signage.

**Trigger:** When a PASER score gives insight to the preferred timeline of a project for applying the correct treatment at the correct time.

**Trunkline abbreviations:** The prefixes *M-*, *I-*, and *US* indicate roads in Michigan that are part of the state trunkline system, the Interstate system, and the US Highway system. These roads consist of anything from 10-lane urban freeways to two-lane rural highways and even one non-motorized highway; they cover 9,668 centerline miles. Most of the roads are maintained by MDOT.

**Trunkline bridges:** Bridge present on a trunkline road, which typically connects cities or other strategic places and is the recommended rout for long-distance travel.<sup>26</sup>

**Trunkline maintenance funds:** Expenditures under a maintenance agreement with MDOT for maintenance activities performed on MDOT trunkline routes.

**Trunkline:** Major road that typically connects cities or other strategic places and is the recommended route for long-distance travel.<sup>27</sup>

**Washboarding:** Ripples in the road surface that are perpendicular to the direction of travel.<sup>28</sup>

**Wedge/patch sealcoat treatment:** An asphalt pavement treatment method that involves correcting the damage frequently found at the edge of a pavement by installing a narrow, 2- to 6-foot-wide wedge along the entire outside edge of a lane and layering with HMA. This extends the life of an HMA pavement or chip seal overlay by adding strength to significantly settled areas of the pavement.

**Worst-first strategy:** Asset management strategy that treats only the problems, often addressing the worst problems first, and ignoring preventive maintenance. This strategy is the opposite of the “mix of fixes” strategy. An example of a worst-first approach would be purchasing a new automobile, never changing the oil, and waiting till the engine fails to address any deterioration of the car.

## List of Acronyms

CPM: capital preventive maintenance

---

<sup>25</sup> [second sentence] <http://www.kentcountyroads.net/road-work/road-treatments/ultra-thin-overlay>

<sup>26</sup> [https://en.wikipedia.org/wiki/Trunk\\_road](https://en.wikipedia.org/wiki/Trunk_road)

<sup>27</sup> [https://en.wikipedia.org/wiki/Trunk\\_road](https://en.wikipedia.org/wiki/Trunk_road)

<sup>28</sup> Inventory-based Rating System for Gravel Roads: Training Manual

FHWA: Federal Highway Administration

HMA: hot-mix asphalt

I: trunkline abbreviation for routes on the Interstate system

IBR: Inventory-based Rating

M: trunkline abbreviation for Michigan state highways

MDOT: Michigan Department of Transportation

MTF: Michigan Transportation Fund

NBIS: National Bridge Inspection Standards

NCPP: National Center for Pavement Preservation

NHS: National Highway System

PA 51: Michigan Public Act 51 of 1951

PASER: Pavement Surface Evaluation and Rating

R&R: reconstruction and rehabilitation programs

TAMC: (Michigan) Transportation Asset Management Council

US: trunkline abbreviation for routes on the US Highway system